

SPACE AND BULK REQUIREMENTS - R1 ZONE

MINIMUM LOT SIZE: 15,000 S.F. MINIMUM FRONTAGE: 75 FT. MINIMUM SETBACKS: FRONT YARD 25 FT. REAR YARD SIDE YARD** 1 STORY 12 FT. 1 1/2 STORY 12 FT. 2 STORY 2 1/2 STORY 16 FT. 100 FT. MINIMUM LOT WIDTH:

MAXIMUM LOT COVERAGE: MAXIMUM STRUCTURE HEIGHT: 35 FT.

* PRINCIPAL OR ACCESSORY STRUCTURES WITH GROUND COVERAGE GREATER THAN 100 SF: 25 FT.

20%

ACCESSORY DETACHED STRUCTURES WITH A GROUND COVERAGE OF 144 SF OR LESS: 5 FT.

** THE WIDTH OF ONE (1) SIDE YARD MAY BE REDUCED ONE (1) FOOT FOR EVERY FOOT THAT THE OTHER SIDE YARD IS CORRESPONDINGLY INCREASED, BUT NO SIDE YARD SHALL BE LESS THAN EIGHT (8) FEET IN WIDTH.

GRADING AND DRAINAGE NOTES:

1. ALL DISTURBED AREAS THAT ARE NOT PAVED SHALL RECEIVE 4" LOAM &

2. COMMON BORROW SHALL MEET MDOT SPECIFICATION 703.18.

3. THE GRADING AND DRAINAGE SYSTEM ON THE PROPERTY SHALL BE CONSTRUCTED AND LOCATED AS DEPICTED ON THE APPROVED SITE PLAN AND SAID GRADING AND DRAINAGE SYSTEM SHALL NOT BE MODIFIED WITHOUT FURTHER APPROVAL FROM THE PLANNING AUTHORITY.

GENERAL NOTES

1. TOPOGRAPHIC DATA AND EXISTING CONDITIONS ARE BASED UPON A GROUND SURVEY CONDUCTED BY OWEN HASKELL IN 2011.

2. THE CONTRACTOR IS SPECIFICALLY CAUTIONED THAT THE LOCATION AND/OR THE ELEVATION OF THE EXISTING UTILITIES AS SHOWN ON THESE PLANS IS BASED ON RECORDS OF THE VARIOUS UTILITY COMPANIES AND WHERE POSSIBLE MEASUREMENTS TAKEN IN THE FIELD. THIS INFORMATION IS NOT TO BE RELIED ON AS BEING EXACT OR COMPLETE. THE CONTRACTOR MUST CALL THE APPROPRIATE UTILITY COMPANY AND DIG SAFE AT LEAST 72 HOURS PRIOR TO ANY EXCAVATION TO REQUEST EXACT FIELD LOCATION OF UTILITIES. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO RELOCATE ALL EXISTING UTILITIES WHICH CONFLICT WITH THE PROPOSED IMPROVEMENTS SHOWN ON THE PLANS.

3. MAINTENANCE OF EROSION CONTROL MEASURES IS OF PARAMOUNT IMPORTANCE TO THE OWNER AND THE CONTRACTOR IS RESPONSIBLE FOR COMPLYING WITH ALL EROSION CONTROL MEASURES SHOWN ON THE PLANS. ADDITIONAL EROSION CONTROL MEASURES SHALL BE INSTALLED IF DEEMED NECESSARY BY ON-SITE INSPECTIONS OF THE OWNER OR THEIR REPRESENTATIVES AT NO ADDITIONAL COST TO THE OWNER.

4. ALL WATER UTILITY MATERIALS AND INSTALLATION METHODS SHALL CONFORM TO PORTLAND WATER DISTRICT STANDARDS. DISINFECTION OF WATER LINES SHALL CONFORM TO AWWA STANDARD C651, LATEST REVISION.

5. ALL SEWER MATERIALS SHALL CONFORM TO THE REQUIREMENTS OF THE CITY OF PORTLAND TECHNICAL AND DESIGN STANDARDS AND GUIDELINES.


6. ALL MATERIALS AND CONSTRUCTION METHODS SHALL CONFORM TO MAINE DEPARTMENT OF TRANSPORTATION SPECIFICATIONS. AND CITY OF PORTLAND TECHNICAL AND DESIGN STANDARDS AND GUIDELINES.

7. LOT OWNER IS RESPONSIBLE FOR LAYOUT AND EXTENSION OF ELECTRIC SERVICE, COORDINATE WITH CMP.

8. THE LOT SHALL BE PROVIDED WITH AT LEAST TWO (2) TREES MEETING THE CITY'S ARBORICULTURE SPECIFICATIONS AND WHICH ARE CLEARLY VISIBLE FROM THE STREET LINE AND ARE LOCATED SO AS TO VISUALLY WIDEN THE NARROW DIMENSION OR PROPORTION OF

9. SEWER AND WATER SERVICES SHALL BE INSTALLED BY THE DEVELOPER 5' INTO THE PROPERTY. CONNECTION TO THE HOUSE WILL BE THE RESPONSIBILITY OF THE LOT OWNER. 10. EQUIVALENT STREET TREE SHALL INCLUDE RETENTION OF EXISTING TREES OF SAME OR GREATER CALIPER.


11. ALL WORK SHALL BE DONE IN CONFORMANCE WITH THE CITY OF PORTLAND TECHNICAL STANDARDS, SECTION VIII EROSION AND SEDIMENTATION CONTROL STANDARDS FOR SINGLE AND TWO FAMILY HOMES.

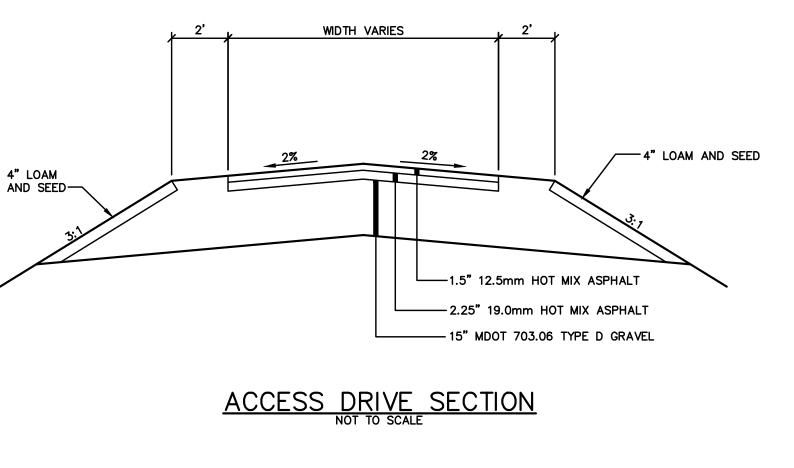

NOTE: THIS PLAN SET IS ISSUED FOR PERMITTING PURPOSES AND SHALL NOT BE USED FOR CONSTRUCTION.

Ι,			
30			
,3030			
9			
WORKIN			
WO			
ð	_	-	_
9	Rev.	Date	Revision

MATCH EXISTING ROADWAY ELEVATION

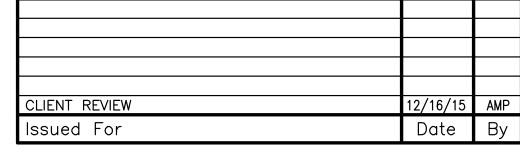

- STABILIZED CONSTRUCTION ENTRANCE


TENAX MULTIMAT FABRIC ON SLOPES
EQUAL TO OR STEEPER THAN 8% FOR

OCTOBER 1st THROUGH APRIL 15th AND

APRIL 15th THROUGH OCTOBER 1st (TYP)

EQUAL TO_OR STEEPER THAN 15% FOR

SEE ACCESS DRIVE PROFILE SHEET 2 -

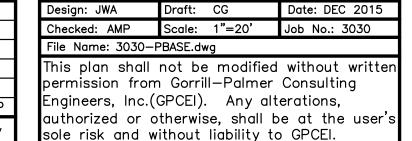

RUN-OFF

RIP RAP OUTLET APRON

-PROTECT EXISTING PIPE

AND QUTLET CHANNEL

OF EXISTING DRAINAGE

GRADING AND DRAINAGE PLAN

* APPROXIMATE LOCATION

−INV. QUT=94.00



Relationships. Responsiveness. Results. www.gorrillpalmer.com 207.657.6910

-4" FOUNDATION

<u>-</u>HNY/ ,Ο/U/T≠9Ø.0ج


-2'x2' GRUSHED STONE


1-1/2" STONE, 6" DEEP


1 inch = 20 ft.


OUTLET PROTECTION.


Drawing Name:	Site, Utility, Grading and Drainage Plans			
Project: Westbrook Street Portland, Maine				
Client:	Diversified Properties P.O. Box 10127, Portland, Maine 04104			



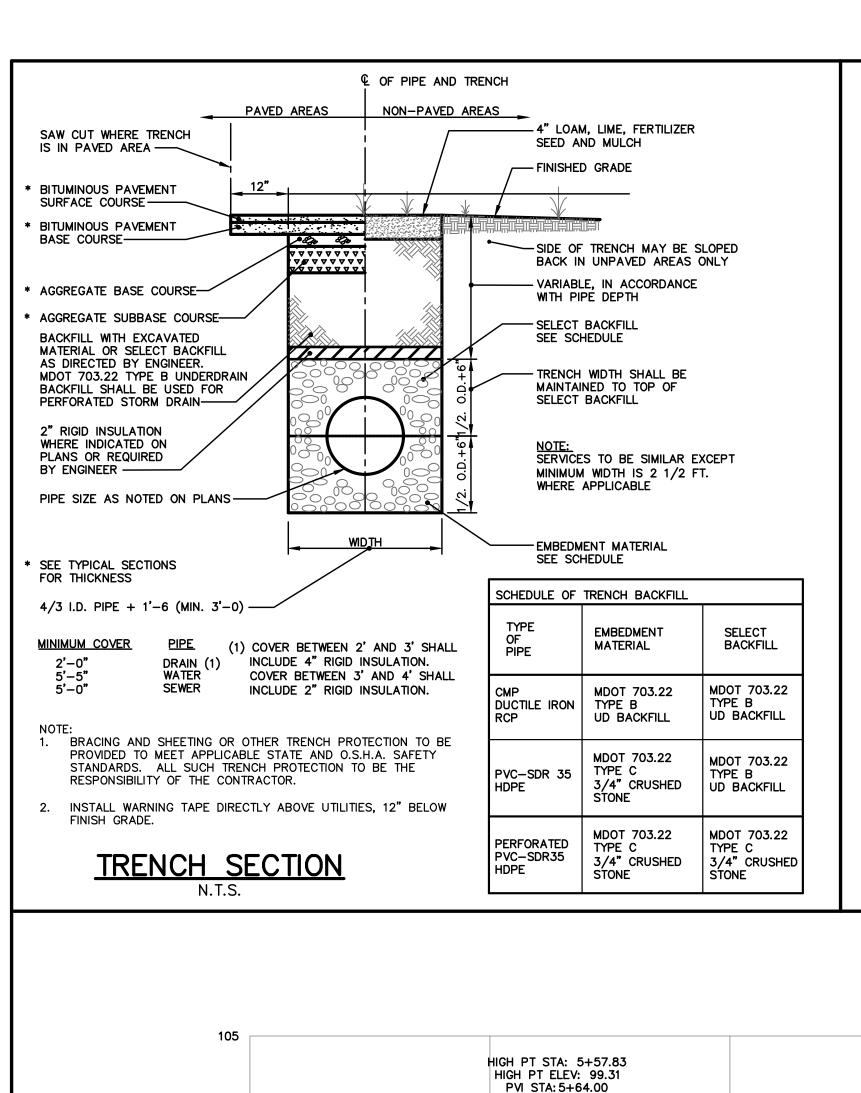


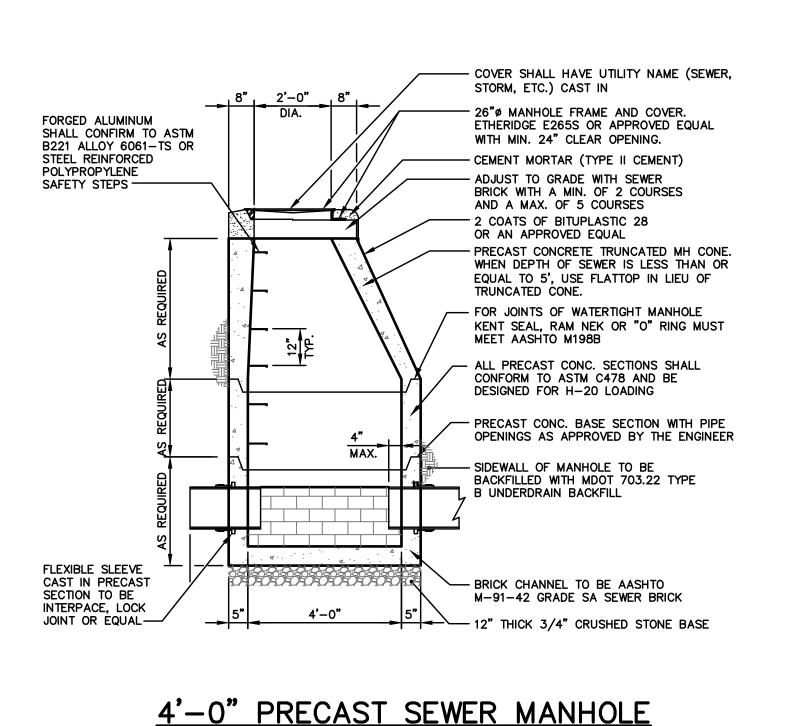

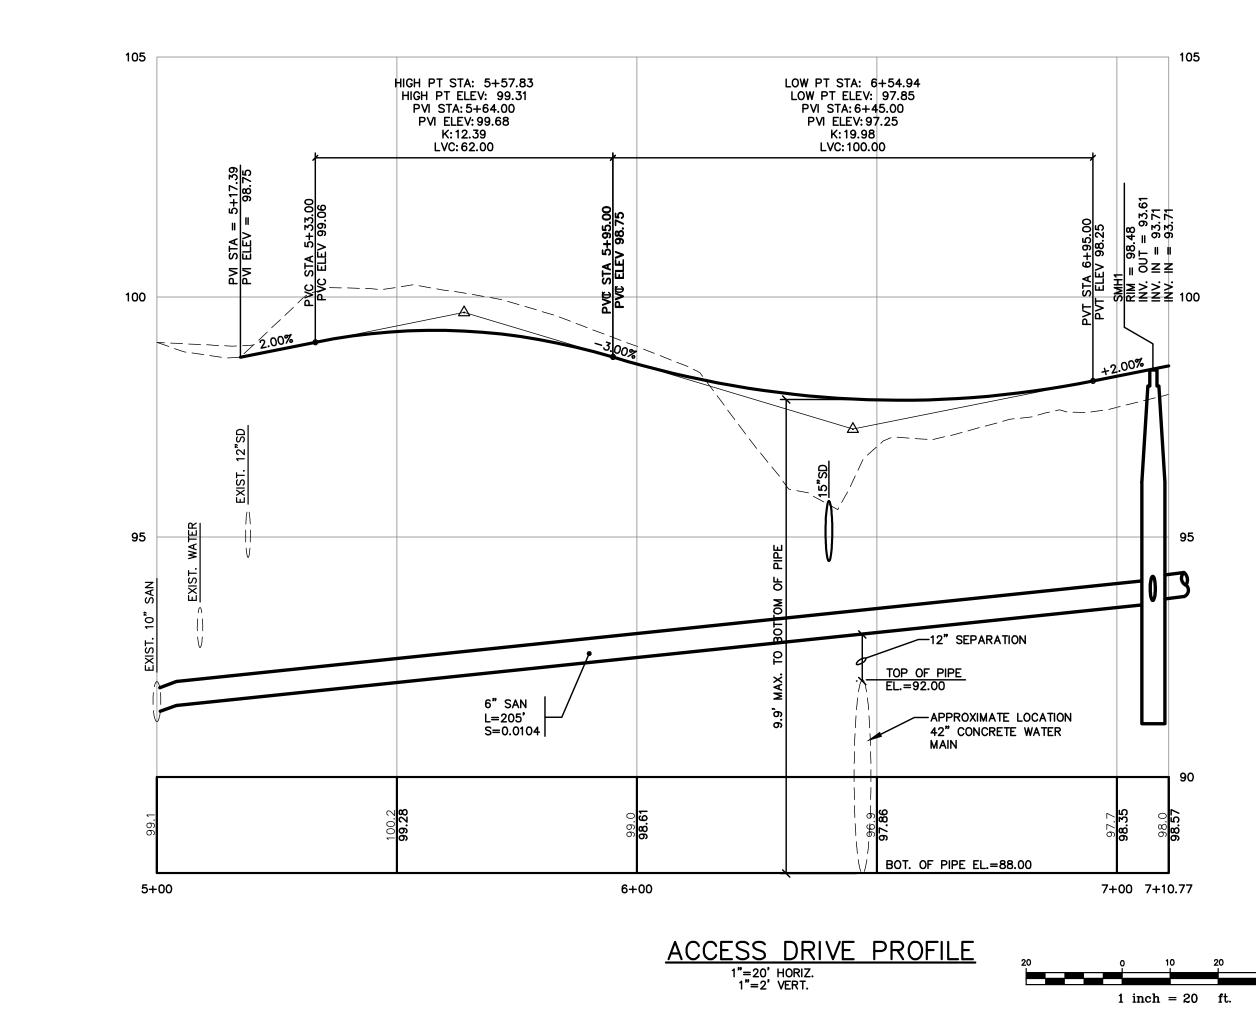

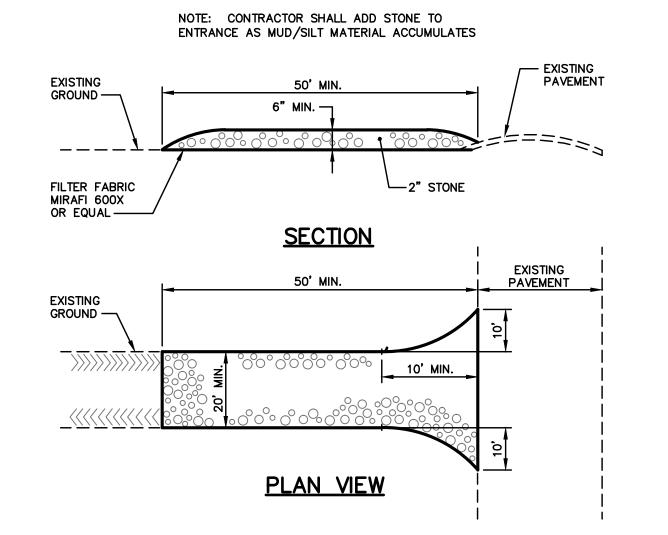



STABILIZED CONSTRUCTION ENTRANCE NOT TO SCALE

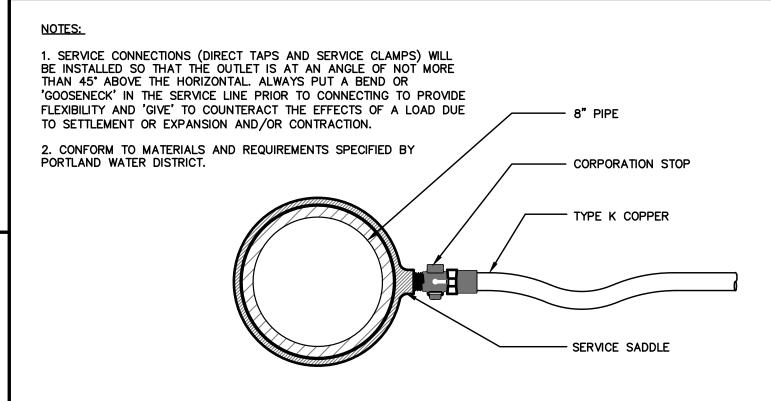


(1 1/2" AND 2 1/2" C.C. OR IRON PIPE THREAD)

WATER SERVICE NOT TO SCALE

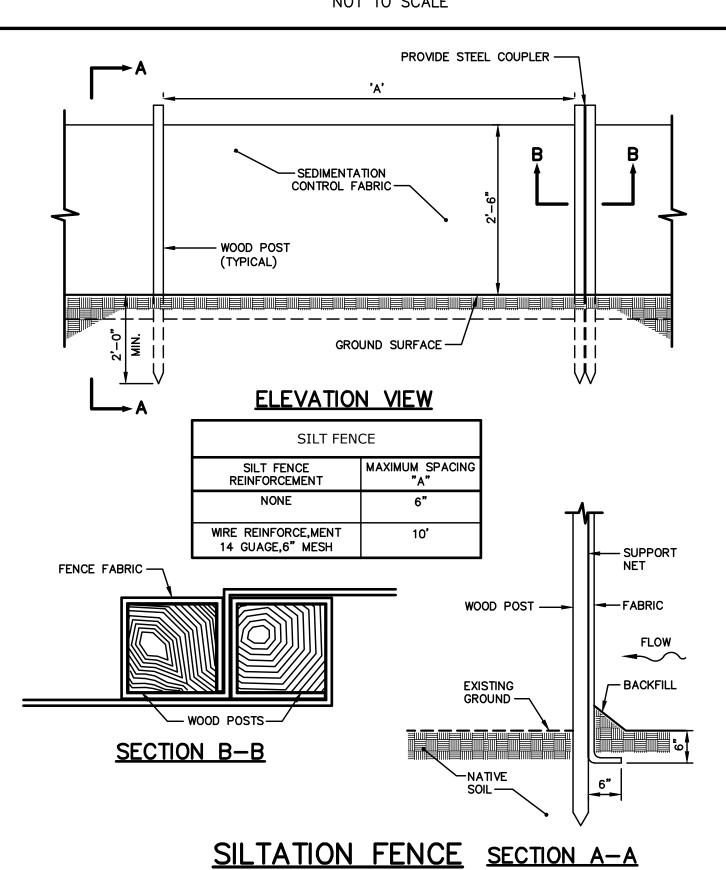

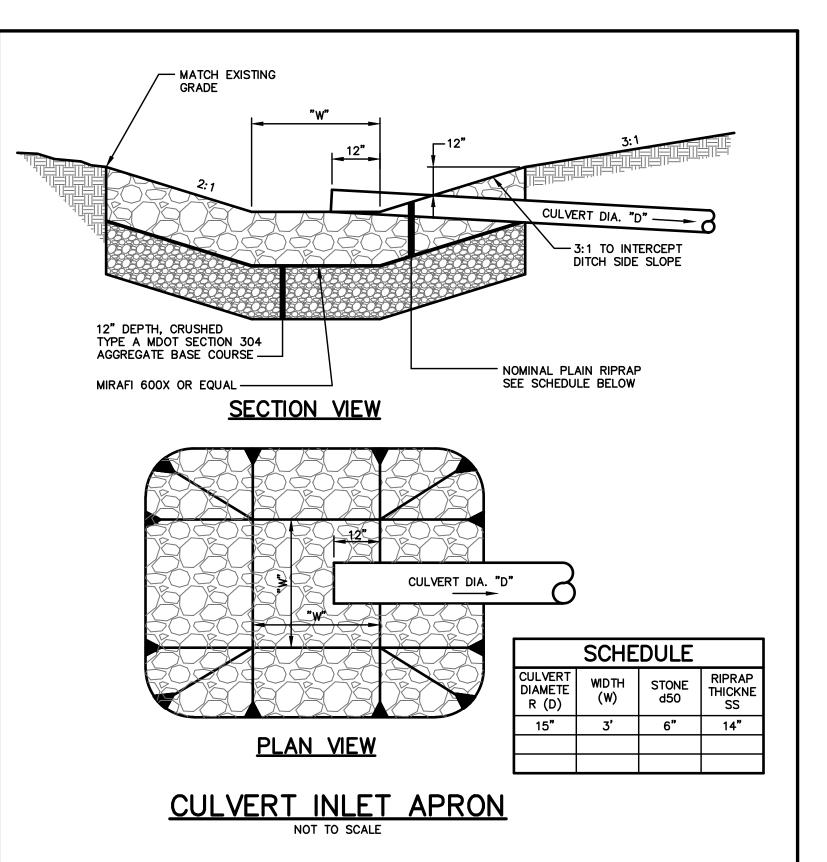


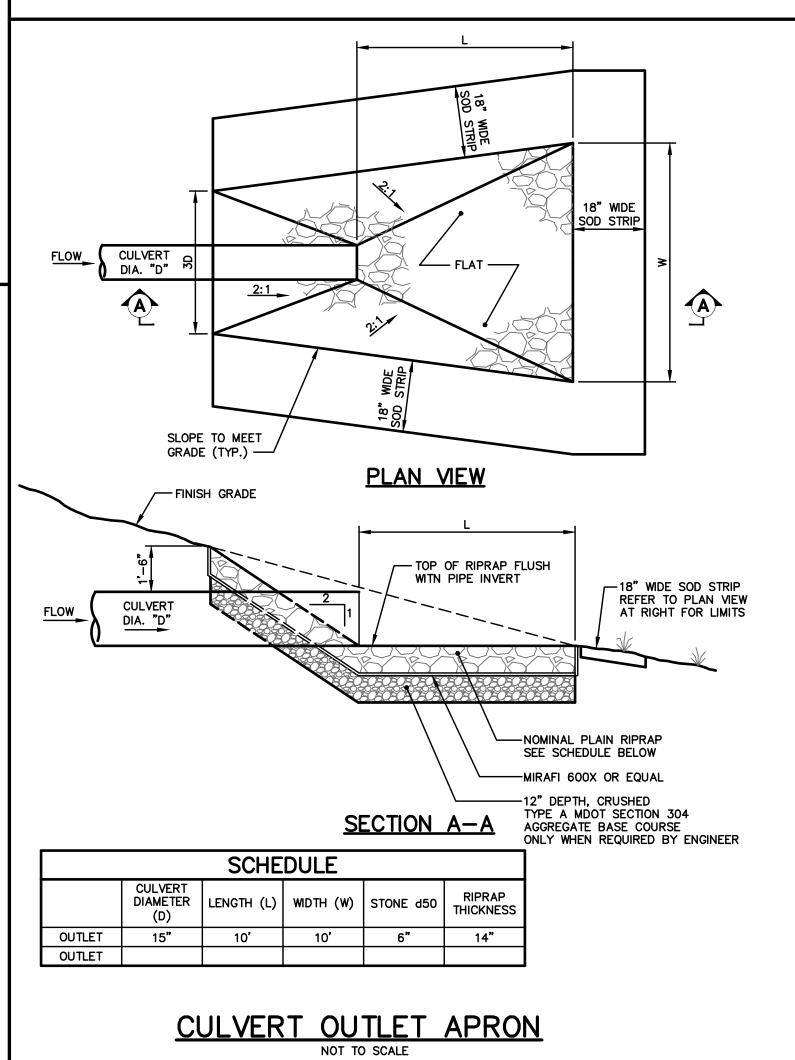

NOTE: THIS PLAN SET IS ISSUED FOR

PERMITTING PURPOSES AND SHALL

NOT BE USED FOR CONSTRUCTION.

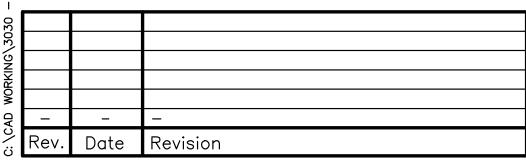

]			
]	CLIENT REVIEW	12/16/15	AMP
	Issued For	Date	Ву
_			

1 1	Design: JWA	Draft:	CG	Date: DEC 2015			
	•						
	Checked: AMP	Scale:	1"=20'	Job No.: 3030			
	File Name: 3030—PBASE.dwg This plan shall not be modified without written						
	permission from Gorrill—Palmer Consulting						
	Engineers, Inc.(GPCEI).	Any alt	erations,			
	authorized or o sole risk and w	therwis ithout	se, shall b Iiability to	e at the user's GPCEI.			



Relationships. Responsiveness. Results. www.gorrillpalmer.com 207.657.6910

Drawing Name:	Profile and Details	
Project:	Westbrook Street Portland, Maine	
Client:	Diversified Properties P.O. Box 10127, Portland, Maine 04104	

Drawing No.