913246

359-B-027

Owner:Phone #Phone #	TO COMPLIENT OF THE PARTY OF TH
Address: 13 David Rd; Ptld, HE 041042	For Official Use Only Subdivision: NOV 25 1001
LOCATION OF CONSTRUCTION 43 David Rd.	Date Subdivis on: Name Name
LOCATION OF CONSTRUCTION	100
Contractor: Donald Dufresne Sub.: 383-3871	Bldg CodeOwnership CITY OF POROIC AND
Contractor: Donald Dufresne Sub.: 383-3871 15 Old Neck Rd; Scarboaro HE 04074 Address: Phone #	Bldg CodeOwnersh PCTY OF POWIC AND Private Estimated Cost
Est. Construction Cost: 13.000 Proposed Use: 1 - fair W repladed	Zoning:
Past Use: 1 + fam	Street Frontage Provided: Back Side Side
# of Existing Res. Units # of New Res. Units	Review Required:
Building Dimensions L Total Sq. Ft	Zoning Board Approval: Yes No Date:
	Planning Board Approval: Yes No Date:
# Stories: # Bedrooms Lot Size:	Conditional Use: Variance Site Plan Subdivision
Is Proposed Use: Seasonal Condominium Conversion	Shoreland Zoning Yes No Floodplain Yes No
Is Proposed Use: Seasonal Condominium Conversion Replace addition - appx 12'x14' Explain Conversion	Special Exception Other (Explain)
Explain Conversion	Cities (Explain)
s (& new foundation)	Ceiling: HISTORIC PRESERVATION
Foundation:	1. Ceiling Joists Size:
1. Type of Soil:	2. Ceiling Strapping Size Spacing Not in District nor Landman
2. Set Backs - Front Rear Side(s)	3. Type Ceilings: 4. Insulation Type 5. Ceiling Height: Boos not require review. Requires Review.
3. Footings Size:	4. Insulation Type Size Requires Review.
4. Foundation Size:	Doof.
5. Other	1. Truss or Rafter Size Span Action; Approved. 2. Sheathing Type Size Approved with Condit
Floor:	2. Sheathing Type Size Approved with Condit
1. Sills Size: Sills must be anchored.	3. Roof Covering Type
2. Girder Size:	Chimneys:
3. Lally Column Spacing: Size: Spacing 16" O.C.	Type: Number of Fire Places Signature:
4. Joists Size: Spacing 16" O.C.	HANTING!
5. Bridging Type: Size: Size:	Electrical:
5. Bridging Type: Size: 6. Floor Sheathing Type: Size: 7. Other Material:	Type of Heat: Electrical: Service Entrance Size: Smoke Detector Required YesNo
r, Otile Material,	
Exterior Walls:	1. Approval of soil test if required Yes No
1. Studding Size Spacing	2. No. of Tubs or Showers
Z. No. windows	3. No. of Flushes
3. No. Doors	4. No. of Lavatories
4. Header Sizes Span(s) 5. Bracing: Yes No	5. No. of Other Fixtures Swimming Pools:
5. Bracing: Yes No. 6. Corner Posts Size	1. Type:
7. Insulation Type Size_	2. Pool Size: x Square Footage
8. Sheathing Type Size	3. Must conform to National Electrical Code and State Law.
9. Siding Type Weather Exposure	Pormit Received By Louise E. Chase
	Permit Received By
10. Masonry Materials 11. Metal Materials nterior Walls: 1. Studding Size Spacing PERMIT ISSUED 2. Header Sizes Span(s) PERMIT ISSUED 4. Fire Wall if required WITH REQUIREMENTS 5. Other Materials	
nterior Walls:	Signature of Applicant Date Management Date
1. Studding Size Spacing Spacing Spacing Span(s) PERMIT INFORMEN	CEO's District PEOUSSIP
3. Wall Covering Type	CEO's District REON SON
4. Fire Wall if required WITH	"YUBOURD IN THE
5. Other Materials	CONTINUED TO REVERSE SIDE
. 그는 그는 그는 그는 사람들이 되면 하면 하면 되었다면 하는 사람들이 되었다	- イフィー・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・・
White - Tax Assessor	Ivory Tag - CEO

PHONE NO.		GE OF WORK, TITLE	RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE
PHONE NO. LOLI	ADDRESS		SIGNATURE OF APPLICANT
		n vivinina Servicia	
we shall have the authority to enter areas covered by such permit at any	application is issued, I certify that the code official or the code official's authorized representative shale reasonable hour to enforce the provisions of the code(s) applicable to such permit.	y that the code officia he provisions of the c	application is issued, I certification is issued, I certification is enforce to
hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as has authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this	e named property, or that the proposed work is agent and I agree to conform to all applicable	owner of record of the on as has authorized	hereby certify that I am the owner to make this application
	CERTIFICATION		
		44444	ANAMARIAN TARIAN
			COMMENTS
			Late Fee \$
			(Explain)
		iew Fee \$	Site Plan Review Fee
		ee \$	
Inspection Record Date	From Front)	FEES (Breakdown From Front)	Race Fee &
nap.	Hove Wheet A		
	: N.	posej ko	
			PLOT PLAN
- 1			

BUILDING PERMIT REPORT

of amough values of being of regarding with 1991 to 9

ADDRESS: 48 DAVID	_ <i>AD</i>	ingal dinasing a city. India dinasing dinasing	DATE: 22/NOV	191
RRASON FOR PERMIT:	replace	_ Addi Tio	res (esta Gravaria 🔻	I Tian
o nement representation in the so-	na sepa di Kapa da Piranga dikia	ada biy din bas		3775
BUILDING OWNER: MARY	-Ann En	aire		
CONTRACTOR: Dans	d Duft	030 E		
PERMIT APPLICANT: //	usqn sil nusa i	endardija obočenja	ktestanog A 190	
APPROVED: X	6 ×7	*/2		Seagge and extremely
CONDITION OF APPROVAL:	the state of the s		- Variation (C.) Establish Salbaron (A.) Haldarija	**************************************

in a representation of expension and

- 1.) Before concrete for foundation is placed, approvals from Public Works and Inspection Services must be obtained.
- 12.) Precaution must be taken to protect concrete from freezing. o sant la celle de celle de lace lace lace de la lace l
 - 3.) All vertical openings shall be enclosed with construction having a fire rating of at least one(1) hour, including fire doors with selfclosers.
 - 4.) Each apartment shall have access to two(2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. A transference of the apartment and the cations
 - 5.) The boiler shall be protected by enclosing with one(1) hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. Sprinkler piping serving not more than six sprinklers may be connected to a domestic water supply system having a capacity sufficient to provide 0.15 gallons per minute, per square foot of floor throughout the entire area. An INDICATING shut-off valve shall be installed in an accessable location between the sprinkler and the connection to the domestic water supply. Minimum pipe size shall be 3/4 inch copper or 1 inch steel. Maximum coverage area of a residential sprinkler is 144 square feet per sprinkler.
- √ 6.) Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside opening without the use of separate tools. Where windows are provided as a means of egress or rescue, they shall have a sill height not more than 44 inches (1118 mm) above the floor. All egress or rescue windows from sleeping rooms must have minimum net clear openings of 5.7 square feet (0.53m2). The minimum net clear opening height dimension shall be 24 inches (610 mm). The minimum net clear opening width dimension shall be 20 inches (508 mm).
- 7.) All single and multiple-station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the building code (BOCA National Building Code 1990, and N.F.P.A. 74).

- 8.) Private garages located beneath rooms in buildings of Use Groups R-1, R-2, R-3 or I-1 shall have walls, partitions, floors and ceilings separating the garage space from the adjacent interior spaces constructed of not less than 1-hour fireresistance rating. Attached private garages shall be completely separated from the adjacent interior spaces and the attic area by means of 1/2-inch gypsum board or equivalent applied to the garage side. The sills of all door openings between the garage and adjacent interior spaces shall be raised not less than 4 inches (102 mm) above the garage floor. The door opening protectives shall be 1 3/4-inch solid core wood doors or approved equivalent.
- 9.) A guardrail system located near the open side of deck or elevated walking surfaces shall be constructed. Guards in buildings of Use Group R-3 shall be not less than 36 inches in height. Open guards shall have intermediate rails, balusters or other construction such that a sphere with a diameter of 4 inches cannot pass through any opening. Handrails on stairs shall be no less than 34 inches nor more than 38 inches. Handrails within individual dwelling units shall not be less than 30 inches nor more than 38 inches. unitarist docimentario de la company de
- 10.) Section 25-135 of the Municipal Code for the City of Portland states: "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year.
- 11.) The builder of a facility to which Section 4594-C of the Maine State Human Rights Act, Title 5 M.R.S.A. refers, shall obtain a certification from a design professional that the plans of the facility meet the standards of construction required by this section. Prior to commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services. on the company of the state of

Sincerely,

Chief of Inspection Services a diseased of the harry as any late and any

/e1


11/16/88

11/27/90

8/14/91

or the contraction of the venture of adversary and contraction (requi

BEPLACE WITH
MEN 12x1x PEMOVE OLD 12'XIY' FOOM OEPT OF BUILDING INSPECTIONS Novo 8 1991 2 DAVID RD 48 DAVID ログノカニメル してのと MAYER ďЯ

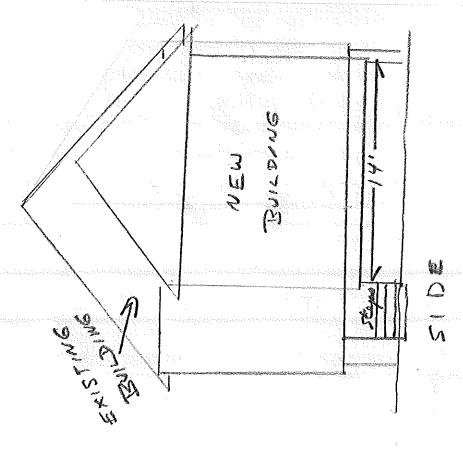


MOV 0 8 1991

MOV 0 8 1991

MOV 0 PROPECTIONS

CITY OF POSTLAND

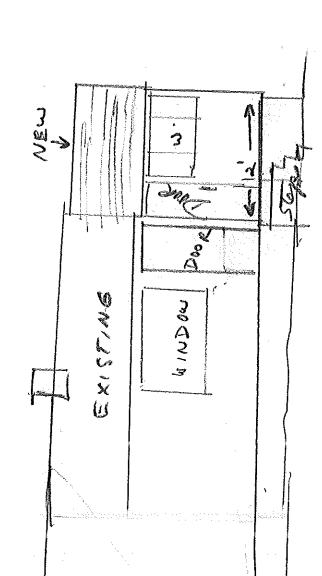

FROST