

1 METAL BOLLARD
NOT TO SCALE

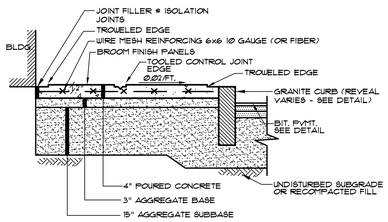

NOTES:
1. INSTALL 45' DEEP SELECT FILL BELOW ENTRANCE SIDEWALKS AT BUILDING (OR TO DEPTH OF SOUND, INTACT BEDROCK). EXTEND SELECT FILL TO A POINT 5 FEET DISTANT FROM BUILDING FOUNDATION WALL.

2. SEE DETAIL 8/C400 THRESHOLD. FOR INSTALLATION AT DOOR

3. SEE DETAIL 10/C400 INSTALLATION. FOR DETECTABLE WARNING PAVER

2 CONCRETE SIDEWALK
NOT TO SCALE

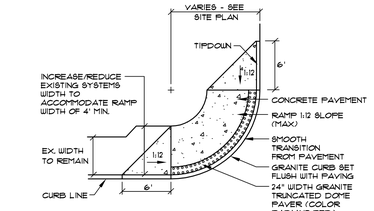

CORNER RAMP



STRAIGHT RAMP

4 HANDICAP RAMP WITH TRUNCATED DOME BAND
NOT TO SCALE

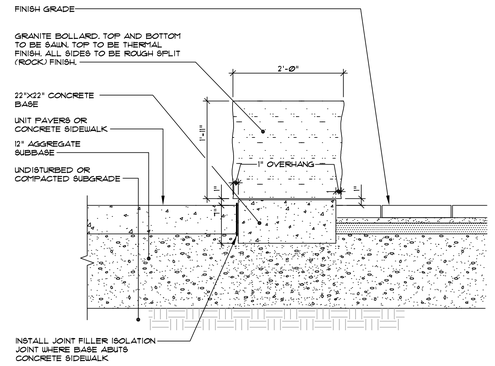

7 GRANITE BOLLARD
NOT TO SCALE

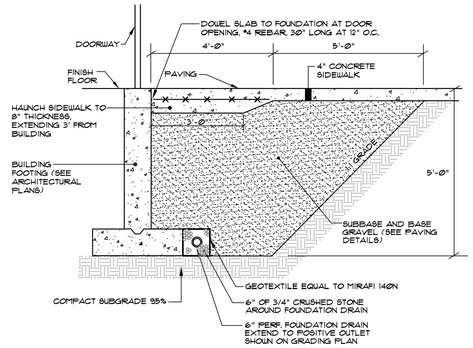

8 5' GRANULAR BASE @ DOOR THRESHOLD
NOT TO SCALE

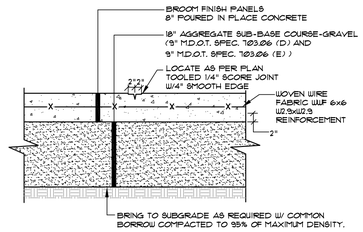

NOTES:
1. COMPACT GRAVEL SUB-BASE, BASE COURSE TO 95% OF MAXIMUM DENSITY USING HEAVY ROLLER COMPACTION.
2. CONTRACTOR SHALL SET GRADE STAKES MARKING SUBBASE AND FINISH GRADE ELEVATIONS FOR CONSTRUCTION REFERENCE.
3. JOINTS SHALL BE SPACED AT 8' MAX. UNLESS OTHERWISE INDICATED ON THE PLANS

5 8" CONCRETE PAVEMENT
NOT TO SCALE

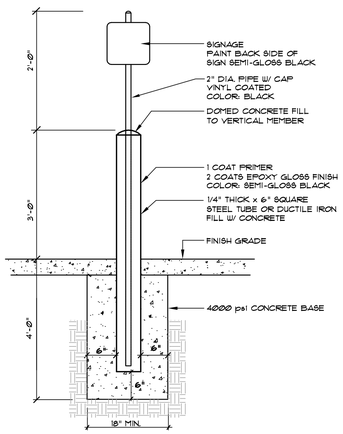

9 METAL BOLLARD AND SIGNPOST
NOT TO SCALE

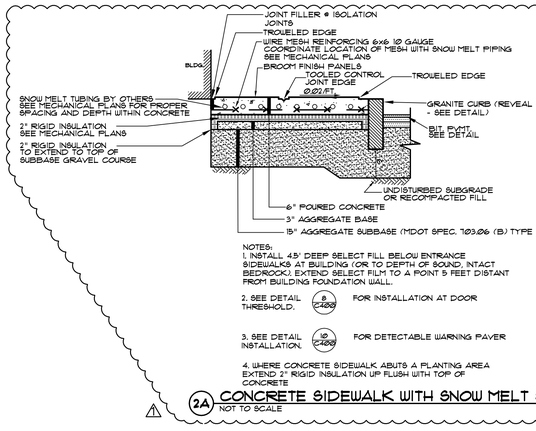

NOTES:
1. INSTALL 45' DEEP SELECT FILL BELOW ENTRANCE SIDEWALKS AT BUILDING (OR TO DEPTH OF SOUND, INTACT BEDROCK). EXTEND SELECT FILL TO A POINT 5 FEET DISTANT FROM BUILDING FOUNDATION WALL.

2. SEE DETAIL 8/C400 THRESHOLD. FOR INSTALLATION AT DOOR

3. SEE DETAIL 10/C400 INSTALLATION. FOR DETECTABLE WARNING PAVER

4. WHERE CONCRETE SIDEWALK ABUTS A PLANTING AREA EXTEND 2" RIGID INSULATION UP FLUSH WITH TOP OF CONCRETE

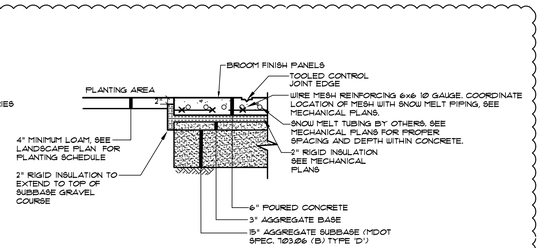

2A CONCRETE SIDEWALK WITH SNOW MELT SYSTEM INTERFACE AT PLANTING AREA
NOT TO SCALE

2A CONCRETE SIDEWALK WITH SNOW MELT SYSTEM
NOT TO SCALE

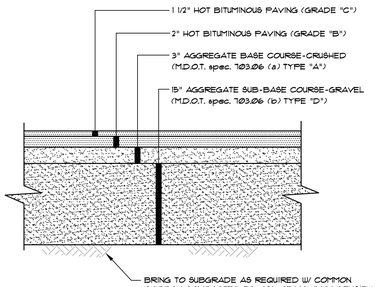

NOTE:
1. COMPACT GRAVEL SUB-BASE, BASE COURSE TO 95% OF MAXIMUM DENSITY USING HEAVY ROLLER COMPACTION.

2. CONTRACTOR SHALL SET GRADE STAKES MARKING SUB-BASE AND FINISH GRADE ELEVATIONS FOR CONSTRUCTION REFERENCE.

3 PARKING LOT SECTION
NOT TO SCALE

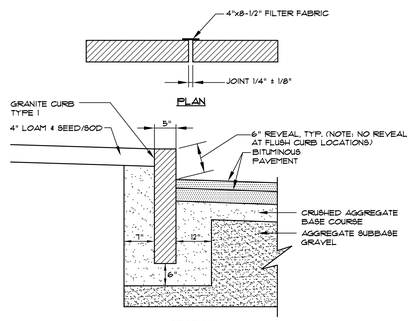

PLAN

SECTION

NOTES:
1. EXCAVATION INCIDENTAL TO TO COST OF CURB.
2. SUBBASE SHALL BE COMPACTED TO A FIRM EVEN SURFACE PRIOR TO SETTING OF CURB.
3. TYPICAL REVEAL FOR VERTICAL CURB INSTALLATION IS 6".
4. NO REVEAL FOR FLUSH CURB INSTALLATION.

6 GRANITE CURB
NOT TO SCALE

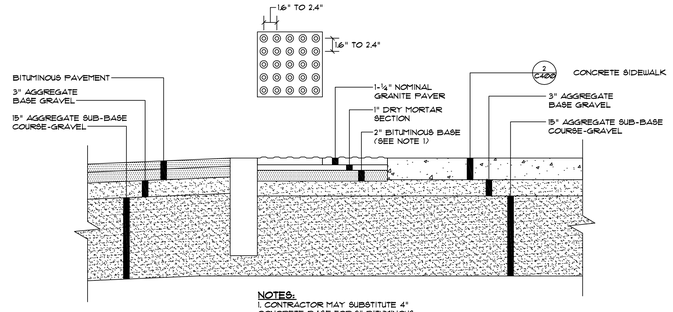

NOTES:
1. CONTRACTOR MAY SUBSTITUTE 4" CONCRETE BASE FOR 2" BITUMINOUS PAVEMENT.

TRUNCATED DOME DOME SPACING REQUIREMENTS:

A. TRUNCATED DOMES SHALL HAVE A BASE DIAMETER OF Ø.9" (23 MM) MINIMUM TO 1.4" (36 MM) MAXIMUM, A TOP DIAMETER OF 50% OF THE BASE DIAMETER MINIMUM TO 65% OF THE BASE DIAMETER MAXIMUM, AND A NOMINAL DOME HEIGHT OF Ø.2" (5 MM).

B. TRUNCATED DOMES IN A DETECTABLE WARNING SURFACE SHALL HAVE A CENTER-TO-CENTER SPACING OF 1.6" (41 MM) MINIMUM AND 2.4" (61 MM) MAXIMUM, AND A BASE-TO-BASE SPACING OF Ø.65" (16 MM) MINIMUM, MEASURED BETWEEN THE MOST ADJACENT DOMES ON THE SQUARE GRID.

C. DETECTABLE WARNING SURFACES SHALL CONTRAST VISUALLY WITH ADJACENT WALKING SURFACES EITHER LIGHT-ON-DARK OR DARK-ON-LIGHT.

10 TRUNCATED DOME PAVING
NOT TO SCALE

General Notes:
-

MARK	ISSUE DATE	DESCRIPTION
1	1/11/08	ADDENDUM NO. 1
BID	12/14/07	BID SET

Issue Log



Key Plan

TRO Jung|Brannen
ARCHITECTURE INTERIOR DESIGN ENGINEERING MASTER PLANNING
22 Boston Wharf Road, Boston, Massachusetts 02210
Tel 617.502.9400 Fax 617.502.3402 www.trojungbrannen.com

Maine Medical Center
ED Expansion and Renovation
Portland, Maine MMC Project No. 21843

Drawing Title
SITE DETAILS

Drawn By	MAL	Commission No.	4696
Approved By	WTC	Date Issued	12/14/07

Phase / Package Number	Sheet Number
	C400

Copyright © 2007 TRO Jung|Brannen

010460-ED.dwg