

**General Notes:**

**DEMOLITION NOTES:**

1. GENERALLY, IN ALL INDICATED AREAS SCHEDULED FOR DEMOLITION AND REMODELING, REMOVE ALL ELECTRICAL DEVICES SUCH AS LIGHTING FIXTURES, WIRING DEVICES, TELEPHONE BOXES, SPEAKERS, FIRE ALARM DEVICES, TELEVISION OUTLETS, DISCONNECT, MOTORS, ETC., THAT ARE LOCATED ON EXISTING WALLS OR PARTITIONS WHICH ARE TO BE DEMOLISHED. REMOVE ALL EXPOSED PORTIONS OF THE BRANCH AND SIGNAL CIRCUIT WIRING AND CONDUITS AND BE RESPONSIBLE FOR MAINTAINING THE CONTINUITY OF EXISTING CIRCUITS FEEDING DEVICES THAT ARE TO REMAIN.
2. IN SUCH CASES WHERE EXISTING WALLS ARE TO REMAIN, ALL EXPOSED RACEWAYS, SURFACE AND RECESSED OUTLET BOXES, ETC., WHICH ARE NOT TO BE REUSED SHALL BE COMPLETELY REMOVED. IN SUCH CASES WHERE NEW CONDUITS AND OUTLETS ARE TO BE INSTALLED IN EXISTING WALLS, IN FURNISHED ROOMS, THEY SHALL BE CONCEALED BY CUTTING AND PATCHING THE WALLS FOR THE CONDUITS AND OUTLET BOXES UNLESS NOTED OTHERWISE.
3. UTILIZE, WHEREVER POSSIBLE, PRACTICAL AND APPROVED BY THE ARCHITECT, EXISTING OUTLET BOXES AND ETC., COMPATIBLE WITH THE MATERIAL SPECIFIED FOR INSTALLATION IN THE NEW CONSTRUCTION AREAS. WHEREVER EXISTING RACEWAY SYSTEMS ARE UTILIZED, REMOVE ALL EXISTING WIRING. IN SUCH CASES, ALL ASSOCIATED CONDUITS AND WIRING SHALL BE ARRANGED TO ACCOMMODATE THE NEW CIRCUITING AS SHOWN ON THIS DRAWING.
4. ALL LIGHTING FIXTURES REMOVED AND NOT RE-USED SHALL BE RETURNED TO HOSPITAL.
5. ALL ELECTRICAL EQUIPMENT REMOVED SHALL BE STOCKPILED FOR FUTURE RE-USE. IN THE EVENT EXISTING DEVICES ARE NOT RE-USED THEY SHALL BE RETURNED TO OWNER OR DISCARDED PER OWNER DIRECTIVE.
6. THE GENERAL INTENT FOR DEMOLITION IS TO REUSE EXISTING LIGHTING FIXTURES AND SWITCHING FOR ROOMS AND CORRIDORS WHERE LOCATIONS WILL BE REMOVED AND REPLACED. THE FIXTURE LOCATIONS ARE BASED ON AS BUILT DRAWINGS. THE ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR REMOVING AND RELOCATING ALL EXISTING LIGHTING FIXTURES IN THESE AREAS THAT MAY NOT BE INDICATED ON THIS DRAWING.
7. IN SOME AREAS WHERE LIGHTING FIXTURES ARE INDICATED AS "XM" IT MAY BE NECESSARY TO REMOVE AND REINSTALL, WHERE CEILINGS ARE BEING REMOVED. THE ELECTRICAL CONTRACTOR IS RESPONSIBLE FOR MAINTAINING OR REMOVING AND REPLACING THESE FIXTURES.
8. ALL FIXTURES THAT ARE INDICATED BY "XM" OR "XR" SHALL BE CLEANED, RE-LAMPED AND NEW BALLASTS INSTALLED.


**DRAWING NOTES:**

1. EXISTING LIGHTING PANELS PBPB1 (NORMAL), CPB1 (CRITICAL) AND LSPB4 (LIFE SAFETY) SERVES THE AREA OF DEMOLITION AND SHALL BE UTILIZED FOR NEW LIGHTING WITHIN THIS AREA. MAINTAIN EXISTING CIRCUITS NOT AFFECTED BY DEMOLITION.
2. ALL LIGHTING WITHIN THIS AREA SHALL BE REMOVED.
3. GENERAL CONTRACTOR IS RESPONSIBLE FOR REMOVING ANY EXISTING CEILING MOUNTED EXAM LIGHTS IN AREAS WHERE CEILINGS WILL BE REMOVED. E.G. SHALL MAKE SAFE ALL WIRING TO THE EXAM LIGHTS THAT ARE INTENDED TO BE REUSED IN THE SAME LOCATION. E.G. SHALL RECONNECT WIRING TO EACH EXAM LIGHT REINSTALLED.
4. MAINTAIN EXISTING CIRCUITING TO THE TASK LIGHTS BEING REMOVED. UTILIZE THE EXISTING CIRCUIT FOR NEW TASK LIGHTS INDICATED ON DRAWING E202.B

MARK	ISSUE DATE	DESCRIPTION

BID	12/14/07	BID SET

**Issue Log**

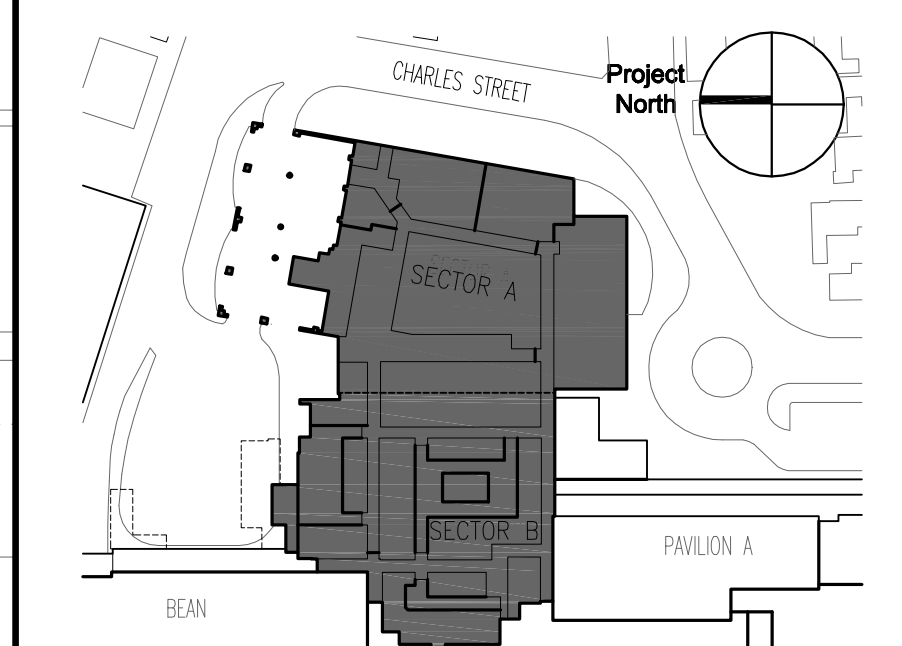

**Key Plan**

**TRO Jung|Brannen**  
 ARCHITECTURE INTERIOR DESIGN ENGINEERING MASTER PLANNING  
 22 Boston Wharf Road, Boston, Massachusetts 02210  
 Tel: 617.562.9400 Fax: 617.562.2402 www.trojngbrannen.com

**Maine Medical Center**  
 ED Expansion and Renovation  
 Portland, Maine MMC Project No. 21843

Drawing Title  
**ELECTRICAL BASEMENT FLOOR LIGHTING DEMOLITION PLAN**

Drawn By	AB	Commission No.	4696
Approved By	KC	Date Issued	12/14/07

Phase / Package Number	Sheet Number
	<b>E11B.B</b>

Copyright © 2007 TRO Jung|Brannen 4696EPF-008-LTG-000