

PLUMBING FIXTURE ROUGHING SCHEDULE							
I.D.	FIXTURE TYPE	USE	CW	HW	S/W	V	REMARKS
WC-1	WATER CLOSET	TOILET ROOM	1"	-	4"	2"	FLOOR MOUNTED/ADA COMPLIANT (SEE NOTE 3)
WC-2	WATER CLOSET	PSYCH	1"	-	4"	2"	FLOOR MOUNTED PSYCH SAFE (SEE NOTE 3)
L-1	LAVATORY	TOILET ROOM	1/2"	1/2"	2"	1-1/2"	CHINA DROP-IN/W SENSOR
L-2	LAVATORY	TOILET ROOM	1/2"	1/2"	2"	1-1/2"	WALL HUNG W/SENSOR
L-3	LAVATORY	TOILET ROOM	1/2"	1/2"	2"	1-1/2"	CORIAN W/SENSOR SINK BY G.C.
SK-1	HAND WASH SINK	MEDS, FORMULA	1/2"	1/2"	2"	1-1/2"	S.S. SELF RIMMING W/WRIST BLADE
SK-2	WORK SINK	SOILED UTILITY	1/2"	1/2"	2"	1-1/2"	S.S. SELF RIMMING W/WRIST BLADE HANDLE
SK-3	WORK SINK	LOUNGE/NOUR.	1/2"	1/2"	2"	1-1/2"	S.S. SELF RIMMING W/SINGLE LEVER SWING SPOUT & INSTA HOT
SK-4	HAND WASH SINK	EXAM	1/2"	1/2"	2"	1-1/2"	WALL HUNG W/SENSOR
SK-5	HAND WASH SINK	SCLSN B623-ER	1/2"	1/2"	2"	1-1/2"	PSYCH SAFE
SK-6	PLASTER SINK	EXAM ROOM	1/2"	1/2"	2"	1-1/2"	WALL HUNG WITH SENSOR & PLASTER TRAP
SK-7	HAND WASH SINK	REFER TO PLANS	1/2"	1/2"	2"	1-1/2"	S.S. SELF RIMMING W/SENSOR
SS-1	DOUBLE SCRUB SINK	TRAUMA	1/2"	1/2"	2"	1-1/2"	WALL HUNG W/CONTROL SENSOR
CSS-1	CLINIC SERVICE SINK	SOILED UTILITY	1"	3/4"	4"	2"	WALL HUNG W/BEDPAN WASH
SH-1	SHOWER		1/2"	1/2"	2"	2"	ACRYLIC 36"x36" UNIT
MSB-1	MOP SERVICE BASIN	HOUSEKEEPING	3/4"	3/4"	3"	2"	W/VACUUM BREAKER OUTLET
EW-1	ELECTRIC WATER COOLER	PASS B017-ER	1/2"	-	2"	1-1/2"	BI-LEVEL W/REMOTE CHILLER

NOTES:

- COORDINATE MOUNTING HEIGHTS WITH ARCHITECTURAL ELEVATIONS AND G.C.
- ALL EXPOSED WASTE, TRAP, AND SUPPLIES SHALL WRAPPED IN PROTECTIVE INSULATION.
- ALL TOILETS SHALL BE 17" HIGH.

MEDICAL GAS ALARM SCHEDULE									
I.D.	LOCATION	OXY	AIR	VAC	N2	N2O	EVAC	CO2	REMARKS
AGA-1	WORK STATION B604-ER	•	•	•					SERVICES ZVB-1
AGA-2	CORRIDOR 585-ER	•	•	•					SERVICES ZVB-2
AGA-3	WORK STATION B618-ER	•	•	•					SERVICES ZVB-3
AGA-4	PASS B403-ER	•	•	•					SERVICES ZVB-4
AGA-5	CORRIDOR B588-ER	•	•	•					SERVICES ZVB-5
AGA-6	PASS B428-ER	•	•	•					SERVICES ZVB-6
AGA-7	ALC B504-ER		•						SERVICES ZVB-7
AGA-8	HALL B234-ER	•	•	•					SERVICES ZVB-8
AGA-9	PASS B317-ER	•	•	•					SERVICES ZVB-9
AGA-10	CORRIDOR B510-ER	•	•	•					SERVICES ZVB-10

NOTES:

- PROVIDE PRESSURE AND VACUUM SWITCHES WITH AWG CABLE IN PROTECTIVE CONDUIT.
- PROVIDE WIRING BETWEEN ALARM PANEL AND PRESSURE SWITCHES.
- MOUNT 66" FROM TOP OF PANEL TO THE FINISHED FLOOR.
- PROVIDE MINIMUM OF 6-SENSING POINTS IN EACH AREA ALARM PANEL.

MEDICAL GAS OUTLET SCHEDULE		
I.D.	PLACEMENT	AREA SERVED
A	OX OX MV MV SL SL MA	EXAM ROOM, ULTRA
B	OX MV SL	RAD, HOLDING
C	MV SL MA OX	PSYCH SAFE HEADWALL
D	MA MV SL OX N2	CT-SCAN - ANESTHESIA BOOM
E	MA MA MV MV MV MV SL SL SL SL OX OX OX OX	TRAUMA B601-ER, PROC B608-ER
F	MA MA MA MA = INSIDE DECON ROOM MA MA MA MA MA MA = OUTSIDE DECON ROOM	DECON B501-ER
G	EXISTING RELOCATED HEADWALL UNIT	SEE NOTE 3

NOTES:

- COORDINATE MOUNTING HEIGHTS/LOCATIONS WITH ARCHITECTURAL ELEVATIONS.
- INCLUDE VACUUM SLIDE BRACKETS.
- THE EXISTING HEADWALLS IN ROOMS B174, B174A, B174B, B184, B188 ARE TO BE REMOVED DURING DEMOLITION PHASE. SAVED BY THE G.C. AND REINSTALLED IN ROOMS B223, B225, B248, B423, B429, B504, AND B505-ER DURING RENOVATION PHASE.


MEDICAL GAS ZONE VALVE BOX SCHEDULE									
I.D.	LOCATION	OXY	AIR	VAC	N2	N2O	EVAC	CO2	SERVES
ZVB-1	CORRIDOR B583-ER	1"	3/4"	1-1/4"	-	-	-		TRAUMA B601-ER
ZVB-2	CORRIDOR B585-ER	1"	1"	1-1/2"	-	-	-		EXAM B513-ER, B514-ER, B515-ER, B517-ER, B519-ER, B520-ER, B521-ER, B561-ER, B563-ER, B564-ER
ZVB-3	CORRIDOR B609-ER	3/4"	3/4"	1-1/2"	-	-	-		EXAM B612-ER, B613-ER, B620-ER, B621-ER, B623-ER, B624-ER
ZVB-4	CORRIDOR B609-ER	1/2"	1/2"	1"	-	-	-		ULTRA B401-ER, CT SCAN B405-ER
ZVB-5	CORRIDOR B588-ER	1"	1"	1-1/2"	-	-	-		EXAM B527-ER, B532-ER, B533-ER, B534-ER, B535-ER, B536-ER, B537-ER, B538-ER, B540-ER, B546-ER, B547-ER, B549-ER, B550-ER
ZVB-6	PASS B428-ER	3/4"	1/2"	1"	-	-	-		RAD 1 B421-ER, HLDNG B423-ER, RAD 2 B424-ER
ZVB-7	ALC B504-ER	1/2"	1"	3/4"	-	-	-		DECON B501-ER, ALC B504-ER
ZVB-8	HALL B234-ER	1/2"	1/2"	1-1/4"	-	-	-		EXAM B223-ER, B225-ER
ZVB-9	PASS B317-ER	3/4"	1/2"	1-1/4"	-	-	-		EXAM B301-ER, B305-ER, B310-ER, B311-ER, B312-ER, B314-ER, B315-ER, B316-ER
ZVB-10	CORRIDOR B510-ER	1/2"	1/2"	3/4"	-	-	-		TRAGE B505-ER

NOTES:

- MOUNT 66" FROM TOP OF PANEL TO THE FINISHED FLOOR.
- VALVE BOX SHALL BE LABELED WITH AREA(S) SERVED.

General Notes:
1. THIS IS A STANDARD SYMBOL LIST. ALL SYMBOLS MAY NOT NECESSARILY APPEAR ON THE FLOOR PLANS OR DETAIL SHEETS. ONLY THOSE INDICATED ON THE FLOOR PLANS AND DETAILS SHEETS SHOULD BE USED, AND ALL OTHERS SHOULD BE DISREGARDED.

MARK	ISSUE DATE	DESCRIPTION
BID	12/14/07	BID SET
Issue Log		

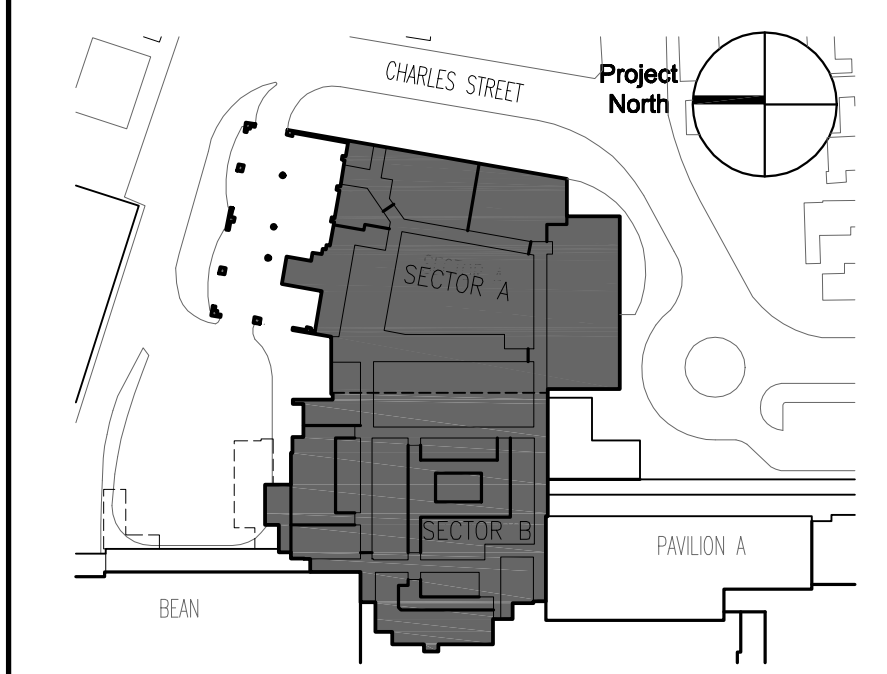

Key Plan

TRO Jung | Brannen
 ARCHITECTURE INTERIOR DESIGN ENGINEERING MASTER PLANNING
 22 Boston Wharf Road, Boston, Massachusetts 02210
 Tel: 617.552.5400 Fax: 617.552.3402 www.trojungbrannen.com

Maine Medical Center
 ED Expansion and Renovation
 Portland, Maine MMC Project No. 21843

Drawing Title
MEDICAL GAS & PLUMBING SCHEDULES

Drawn By SDB Commission No. 4696
 Approved By RMH Date Issued 12/14/07

Phase / Package Number Sheet Number
P002