
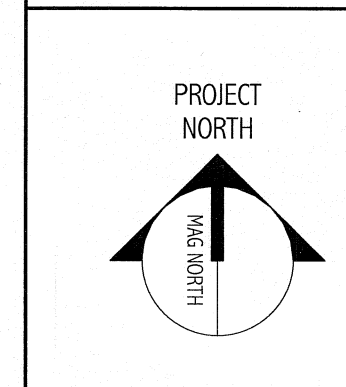
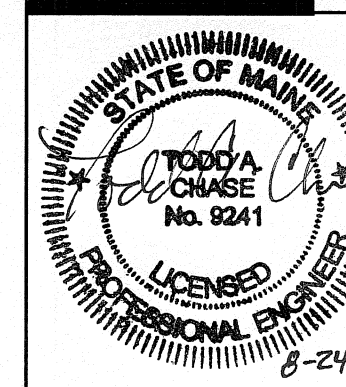


- KEYED NOTES**
- INSTALL 20x12 SUPPLY DUCT OFF THE AHU-44 SUPPLY DUCT TO SERVE THE NDF MACHINE ROOM. INSTALL (2) 18x8 SUPPLY AIR GRILLES WITH VOLUME DAMPERS.
 - INSTALL (2) 18x8 RETURN GRILLES WITH VOLUME DAMPERS ON THE RETURN DUCT SERVING AHU-44 IN THE NDF MACHINE ROOM.

1 ANGIO DEMOLITION PLAN
1/8" = 1'-0"

144 Fore Street, P.O. Box 618
Portland, Maine 04104
Tel: (207) 773-3846
Fax: (207) 773-1070
www.smartrc.com

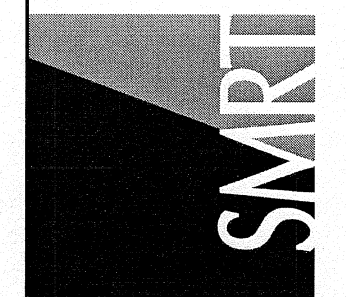

Bramhall Radiology
ANGIO RENOVATIONS
PORTLAND, ME

ISSUED FOR CONSTRUCTION
08.24.10

CURRENT ISSUE STATUS: DATE

REV	DESCRIPTION	DATE
0	ISSUED FOR CONSTRUCTION	8.24.10

GRAPHIC SCALE:
0" 1"

SCALE: 1/8" = 1'-0"
PROJECT MANAGER: DM
IC/DRAWN BY: KPB
A/E OF RECORD: TMC
PROJECT NO.: 09022-01
DATE: 08.24.10

SHEET TITLE:
ANGIO DEMOLITION
PLAN

SHEET No.
MD101