MAINE MEDICAL CENTER
O.R. RENOVATION
Portland, Maine

GENERAL NOTES:

1. FIELD VERIFY ALL DIMENSIONS AND LAYOUT PRIOR TO PROCEEDING WITH WORK. NOTIFY ARCHITECT IN WRITING OF ANY DISCREPANCIES OR INCONSISTENCIES. FAILURE TO REPORT ANY DISCREPANCIES WITHIN THESE CONSTRUCTION DOCUMENTS TO THE ARCHITECT WILL NOT BE GROUNDS FOR ADDITIONAL COST OR CHANGE ORDERS.
2. CONTRACTOR SHALL BE RESPONSIBLE FOR PROVIDING ALL MATERIALS (UNLESS NOTED OTHERWISE), AND WORKMANSHIP IN ACCORDANCE WITH FEDERAL, STATE, CITY AND LOCAL BUILDING CODES AND THEIR REQUIREMENTS.
3. CONTRACTOR TO CONFIRM EXISTING WALL RATINGS.
4. CONTRACTOR AND ALL TRADES SHALL NOTE REQUIREMENTS OF "GENERAL NOTES" ON ALL SHEETS.
5. EACH TRADE TO PROVIDE SMOKE OR FIRE SEALANT AT PENETRATIONS AS REQUIRED FOR WALL TYPE. ALL SEALANT, FIRE STOPPING, AND SMOKE STOPPING ASSEMBLIES SHALL BE U.L. RATED.
6. DIMENSIONS ARE FACE OF CONCRETE, FACE OF MASONRY, FACE OF EXISTING PARTITION AND CENTERLINE OF STUD PARTITIONS, UNLESS INDICATED OTHERWISE.
7. REFER TO ALL CONSTRUCTION DOCUMENTS FOR REQUIREMENTS WHICH MAY AFFECT THE WORK IN ANOTHER AND COORDINATE WORK.
8. REFER TO SHEET GI002 FOR TYPICAL MOUNTING HEIGHTS OF PLUMBING FIXTURES, BATHROOM ACCESSORIES AND MISC. ITEMS.
9. REFER TO DETAILS FOR ADDITIONAL DIMENSIONAL INFORMATION.
10. DOOR JAMBS SHALL BE LOCATED 6" FROM CORNER IN STUD PARTITIONS AND 8" FROM CORNER IN MASONRY PARTITIONS, UNLESS INDICATED OTHERWISE.
11. PROVIDE BLOCKING IN WALLS AS NECESSARY WHERE CASEWORK, SHELVES, HANDRAILS, AND MISC. EQUIPMENT ARE LOCATED.
12. PATCH ALL HOLES, WALLS AND CRACKS IN ROOMS TO RECEIVE NEW PAINT.
13. DO NOT SCALE DRAWINGS.
14. "PROVIDE" MEANS "FURNISH AND INSTALL".

ABBREVIATIONS

AB	ANCHOR BOLT	L	ANGLE; LENGTH
AC, A/C	AIR CONDITIONING	LF	LEFT
ACCU	AIR CONDITIONING CONDENSER UNIT	LINO	SHEET LINOLEUM
ACPLAS	ACOUSTICAL PLASTER	LL	LIVE LOAD
ACT	ACOUSTIC CEILING TILE	LLH	LONG LEG HORIZONTAL
AFF	ABOVE FINISHED FLOOR	LLV	LONG LEG VERTICAL
AGG	AGGREGATE	LP	LIGHTING PANEL; LIQUIFIED PROPANE
ALT	ALTERNATE		
AP	ACCESS PANEL		
APROX	APPROXIMATE	MAX	MAXIMUM
ARCH	ARCHITECTURAL	MB	MARKER BOARD
		MDO	MEDIUM DENSITY OVERLAY
BCX	BOTTOM CHORD EXTENSION	MECH	MECHANICAL
BD	BOARD	MFR	MANUFACTURER
BIT	BITUMINOUS	MIN	MINIMUM
BLDG	BUILDING	MISC	MISCELLANEOUS
BLP	BORROWED LIGHT PANEL	MO	MASONRY OPENING
BO	BOTTOM OF	MR	MOISTURE-RESISTANT
BOF	BOTTOM OF FOOTING	MUA	MAKE-UP AIR
BOS	BOTTOM OF STEEL		
BOT	BOTTOM	N	NOSING
BRDG	BRIDGING	NCB	NEW CATCH BASIN
BRG	BEARING	NDMH	NEW DRAIN MANHOLE
BS	BOTH SIDES	NFM	NEW FORCE MAINE
BSE	BRICK SHELF ELEVATION	NIC	NOT IN CONTRACT
		NS	NEAR SIDE
C	CHANNEL	NSD	NEW STORM DRAIN LINE
CB	CATCH BASIN; CHALKBOARD	NSS	NEW SANITARY SEWER LINE
CEM BD	CEMENTITIOUS BACKER BOARD	NTS	NOT TO SCALE
CFM	CUBIC FEET PER MINUTE	NW	NEW WATER LINE
CIP	CAST IN PLACE		
CJ	CONTROL JOINT; CONSTRUCTION JOINT	OC	ON CENTER
		OF	OUTSIDE FACE
CL	CENTER LINE	OH	OVERHEAD
CLL	CONTRACT LIMIT LINE		
CLR	CLEAR	PA	PUBLIC ADDRESS
CMU	CONCRETE MASONRY UNIT	PAF	POWDER-ACTUATED FASTENER
COL	COLUMN	PDU	POOL DEHUMIDIFICATION UNIT
CONC	CONCRETE	PL	PLATE; PROPERTY LINE
CONT	CONTINUOUS	PLAM	PLASTIC LAMINATE
CT	CERAMIC TILE	PLF	POUNDS PER LINEAR FOOT
CUH	CABINET UNIT HEATER	PP	POWER PANEL
		PSF	POUNDS PER SQUARE FOOT
DIA.	DIAMETER	PSI	POUNDS PER SQUARE INCH
DBL	DOUBLE	PT	PRESSURE-TREATED
DF	DRINKING FOUNTAIN	PVC	POLYVINYL CHLORIDE
DL	DEAD LOAD	PVMT	PAVEMENT
DR	DISPLAY RAIL		
DTL	DETAIL	R	RISER; RADIUS
DW	DISHWASHER	RB	RESILIENT BASE
DWG	DRAWING	RD	ROOF DRAIN
		REINF	REINFORCED
EA	EACH	REQ'D	REQUIRED
EF	EXHAUST FAN; EACH FACE	RT	RIGHT
EJ	EXPANSION JOINT	RO	ROUGH OPENING
EL	ELEVATION	ROW	RIGHT OF WAY
ELEC	ELECTRICAL	RR	RUB-RAIL
EOP	EDGE OF PAVEMENT	RTU	ROOFTOP UNIT (HVAC)
EPDM	ETHYLENE PROPYLENE DIENE MONOMER	SACT	SUSPENDED ACOUSTIC
EQ	EQUAL		TILE CEILING
EW	EACH WAY	SC	SOLID CORE
EWC	ELECTRIC WATER COOLER	SF	SQUARE FOOT; SUPPLY FAN
EXIST	EXISTING	SHT	SHEET
EXP	EXPANSION	SIM	SIMILAR
EXT	EXTERIOR	SK	SHEAR KEY
		SN	SANITARY NAPKIN (DISPENSER)
FB	FLAT BAR	SP	SPECIAL
FBO	FURNISHED BY OTHERS	SS	STAINLESS STEEL
FCO	FLOOR CLEAN-OUT	STA	STATION
FD	FLOOR DRAIN	STL	STEEL
FE	FIRE EXTINGUISHER	STRUC	STRUCTURAL
FF	FINISHED FLOOR; FAR FACE		
FFE	FINISHED FLOOR ELEVATION	T	TREAD
FO	FRAMED OPENING	TB	TACKBOARD
FRP	FIBERGLASS REINFORCED PLASTIC	T&B	TOP AND BOTTOM
FS	FAR SIDE	TBM	TEMPORARY BENCHMARK
FTG	FOOTING	TCE	TOP CHORD EXTENSION
		TJ	TIE JOIST
GA	GUAGE	TO	TOP OF
GALV	GALVANIZED	TOC	TOP OF CONCRETE
GB	GRAB BAR	TOF	TOP OF FOOTING
GC	GENERAL CONTRACTOR	TOM	TOP OF MASONRY
GDT	GYPSUM DROP-IN TILE	TOP	TOP OF PIER
GV	GRAVITY VENT	TOS	TOP OF STEEL; TOP OF SLAB
GWB	GYPSUM WALL BOARD	TOW	TOP OF WALL
H	HORIZONTAL	TP	TOILET PAPER (DISPENSER); TEST PIT
HC	HANDICAPPED; HOLLOW CORE	TS	TUBE STEEL
HORIZ	HORIZONTAL	TYP	TYPICAL
HM	HOLLOW METAL		
HRU	HEAT RECOVERY UNIT	UH	UNIT HEATER
H&V	HEATING AND VENTILATING	UNO	UNLESS NOTED OTHERWISE
HVAC	HEATING, VENTILATING AND AIR CONDITIONING		
		V	VENT PIPE; VERTICAL
I	INCLUDED ANGLE	VB	VAPOR BARRIER
ID	INSIDE DIAMETER	VCT	VINYL COMPOSITION TILE
IF	INSIDE FACE	VERT	VERTICAL
IJ	ISOLATION JOINT	VP	VISION PANEL
IMP	IMPACT RESISTANT	VTR	VENT THROUGH THE ROOF
INS	INSULATED		
INV	INVERT	W/	WITH
		WC	WATER CLOSET
JS	JOIST SUBSTITUTE	WF	WIDE FLANGE
		WH	WATER HEATER
K	KIPS	W/O	WITHOUT
		WP	WORKING POINT
		WS	WEB STIFFENER
		WWF	WELDED WIRE FABRIC

SYMBOL LEGEND

- A00 / AE000 — BUILDING SECTION
- A00 / AE000 — WALL SECTION
- A00 / AE000 — DETAIL
- A00 / AE000 — EXTERIOR ELEVATION
- A / A00 / AE000 / B / C — INTERIOR ELEVATION
- LEVEL LINE
- (8) CIRCLE NOTE
- 8 WINDOW TAG
- 8 PARTITION TAG
- 402 DOOR TAG
- MAIN LOBBY / A402 — ROOM NAME / ROOM NUMBER
- A — COLUMN BUBBLE AND CENTER LINE
- S BACKER ROD AND SEALANT

GRID NO.	TITLE
SCALE	REFERENCE SHEET

LOCATION MAP:

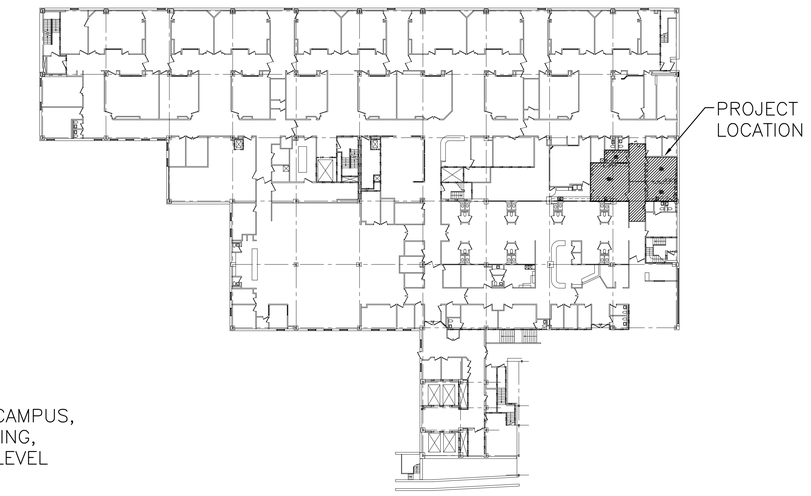

BRAMHALL CAMPUS,
BEAN BUILDING,
BASEMENT LEVEL

DRAWING LIST

GENERAL

GI001 COVER SHEET, DRAWING LIST, LEGEND AND ABBREVIATIONS
GI002 GENERAL MOUNTING HEIGHTS, TOP OF WALL DETAILS AND SEISMIC REQUIREMENTS

ARCHITECTURAL

AD101 DEMOLITION PLAN AND REFLECTED CEILING DEMOLITION PLAN

AE101 FLOOR PLAN, REFLECTED CEILING PLAN AND FLOOR FINISH PLAN
AE102 ENLARGED FLOOR PLAN, REFLECTED CEILING PLAN AND EQUIPMENT SCHEDULE.

AE201 INTERIOR ELEVATIONS

AE601 DOOR AND FINISH SCHEDULE, DOOR, FRAME AND WINDOW TYPES, DETAILS

STRUCTURAL

S-101 FRAMING PLAN AND GENERAL NOTES

S-501 FRAMING SECTIONS AND DETAILS

MECHANICAL

M-001 LEGEND AND ABBREVIATIONS

M-101 DEMOLITION AND HVAC PLANS
M-102 DEMOLITION AND HVAC PIPING PLAN

M-501 DETAILS

M-601 SCHEDULES

PLUMBING

P-101 DEMOLITION AND PLUMBING PLANS

P-501 SCHEDULES, DETAILS AND PART PLAN

ELECTRICAL

E-001 LEGEND AND GENERAL NOTES

ED101 POWER AND LIGHTING DEMOLITION FLOOR PLANS

EP101 POWER FLOOR PLAN AND SCHEDULE

EL101 LIGHTING FLOOR PLAN AND SCHEDULE

EY101 SYSTEMS FLOOR PLAN

CODE COMPLIANCE

PRINCIPAL CODES, STANDARDS, AND REVIEW AUTHORITIES APPLICABLE TO PROJECT

GENERAL:
GUIDELINES FOR DESIGN AND CONSTRUCTION OF HOSPITAL AND HEALTH CARE FACILITIES, 2001 EDITION.

FIRE:
NFPA INCLUDING 101 LIFE SAFETY CODE, 2003 EDITION
STATE FIRE MARSHAL'S OFFICE, STEVEN DODGE
PHONE: (207)624-8744 FAX: (207)624-8767

BUILDING:
BOCA, 1999 EDITION
MGR. OF INSP. SERV., MICHAEL NUGENT
PHONE: (207)874-8703 FAX: 874-8716

ACCESSIBILITY:
ADA, ACCESSIBILITY GUIDELINES FOR BUILDINGS AND FACILITIES.

AMERICANS WITH DISABILITY ACT, 1994
STATE FIRE MARSHAL'S OFFICE, STEVEN DODGE
PHONE: (207)624-8744 FAX: (207)624-8767

MECHANICAL:
BOCA MECHANICAL CODE, 1993 EDITION
A.S.H.R.A.E. STANDARD 62, 2001 EDITION

PLUMBING:
MAINE STATE INTERNAL PLUMBING RULES
LICENSE INSPECTOR, DANA TUTTLE
PHONE: (207)624-8639

AUTOMATIC SPRINKLER SYSTEM:
STATE FIRE MARSHAL'S OFFICE, STEVEN DODGE
PHONE: (207)624-8744 FAX: (207)624-8767

ENERGY:
A.S.H.R.A.E. STANDARD 90.1, 1999 EDITION
STATE OF MAINE DEPARTMENT OF ECONOMIC AND COMMUNITY DEVELOPMENT
ENERGY CONSERVATION DIVISION, CHRISTOPHER CAROL
PHONE: (207)287-8457 FAX: (207)287-5701

ELECTRICAL:
NATIONAL ELECTRICAL CODE, NFPA 70, 2000 EDITION

LIFE SAFETY AND BUILDING CODE CRITERIA:
USE GROUP CLASSIFICATION:
EXISTING HEALTHCARE, NFPA CHAPTER 19
USE GROUP I-2, BOCA

PROTECTION:
FIRE ALARM: NFPA 70 & 72
SPRINKLER SYSTEM IN ACCORDANCE WITH NFPA 13
FIRE EXTINGUISHERS: NFPA 10
EMERGENCY LIGHTING: NFPA 72

REV.	DESCRIPTION	DATE
0	ISSUED FOR CONSTRUCTION	7-29-04

ISSUED FOR CONSTRUCTION
7-29-04

CURRENT ISSUE STATUS:

PROJECT NORTH

SMRT
ARCHITECTURE ENGINEERING PLANNING
SMRT
144 Fore Street/P.O. Box 618
Portland, Maine 04104
tel. (207) 772-3846
fax. (207) 772-1070

MAINE MEDICAL CENTER
O.R. RENOVATION
Portland, Maine
PROJECT:

COVER SHEET, DRAWING LIST
LEGEND AND ABBREVIATIONS
SHEET TITLE:

SCALE:	AS NOTED	DATE:	7-29-04
PROJECT MANAGER:	CFG	GRAPHIC SCALE:	0" 1"
JOB CAP/DRAWN:	SDL/SDL		
A/E OF RECORD:	CFG	SHEET No.	GI001
SMRT CAD FILE:	GI001-03122		
PROJECT No.	03122		

© COPYRIGHT 2003 SMRT INC