




- NOTES:**
1. Typical floor slab is 3 1/4" lightweight concrete on 3'-20 ga. composite metal deck. Total thickness 6 1/4". Reinforce with #3@12" o.c. Provide additional #4 x 8'-0" long @ 12" o.c. over all girders and at all slab edges. Top of steel deck is 6 1/4" below top of slab elevation shown unless otherwise noted thus (10") indicating change from typical steel elevation.
  2. Refer to Drawing S501 for lintel schedule and Typical Lintel Details.
  3. Contractor shall coordinate openings and sleeves through slabs for electrical conduit to avoid conflicts with steel framing.
  4. All infill framing shown on plan, without size indicated, shall be W10x12, Typ.
  5. All steel framing, including infill framing, shall have 3/4" x 5" headed studs @ 12" o.c., min, Typ.
  6. Refer to drawings by others for size and location of concrete housekeeping pads on Fifth Floor.

**SGH**  
**Simpson Gumpertz & Heger Inc.**  
 Consulting Engineers  
 Boston, MA 41 Sejan Street, Telephone: (781) 907 9000  
 Building 1, Suite 500 Fax: (781) 907 9009  
 Waltham, MA 02453  
 San Francisco, CA 223 Sutter Street, Telephone: (415) 498 3700  
 Suite 300 San Francisco, CA Fax: (415) 498 3550  
 94108-4443  
 Washington, DC 1335 Piccard Drive, Telephone: (301) 417 0999  
 Suite 220 Rockville, MD Fax: (301) 417 9825  
 20850

**FOR PERMIT ONLY - NOT FOR CONSTRUCTION**


PERMIT: 09/24/04 PERMIT SET - NOT FOR CONSTRUCTION  
 Issue Log

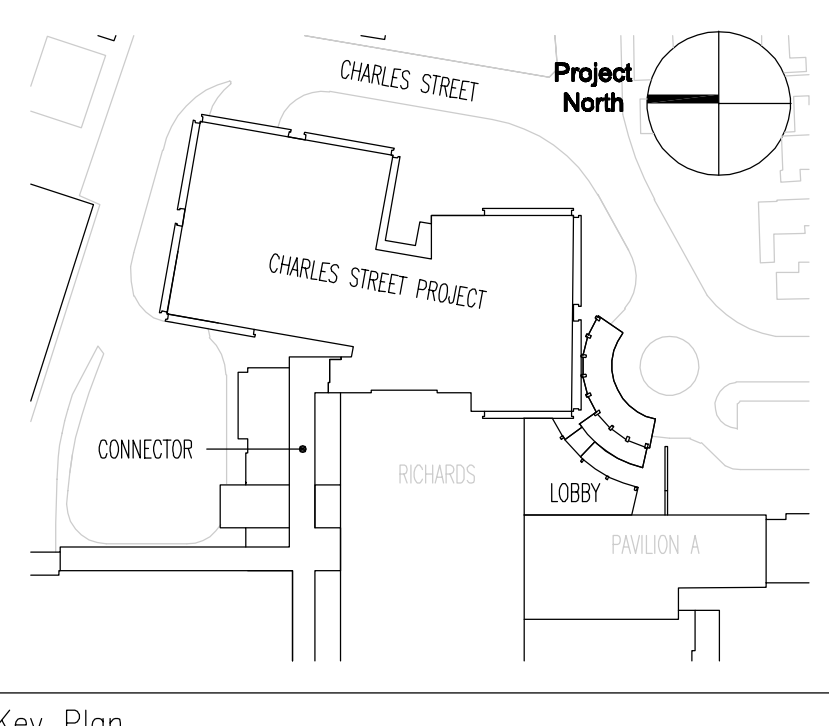

**TRO**  
 ARCHITECTURE  
 PLANNING  
 ENGINEERING  
 INTERIOR DESIGN  
 The Ritchie Organization  
 80 Bridge Street  
 Newton, MA 02458-1134  
 617-969-9400

**Maine Medical Center**  
 Charles Street Project  
 Portland, Maine MMC Project No. 21841

Drawing Title  
**FIFTH/MECHANICAL FLOOR FRAMING PLAN**

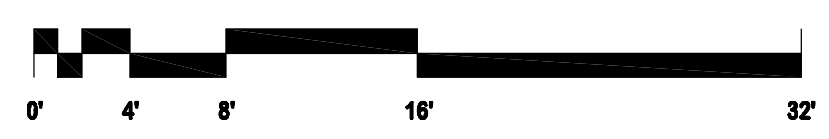

Commission No.	4673	Date Issued	
Scale	AS NOTED	Sheet Number	
Drawn By	KMG/SK		
Approved By	JMT/JMT		
File Name	L:\2000\20684.00\		

**S205**