
Overall Length: 11' 1"

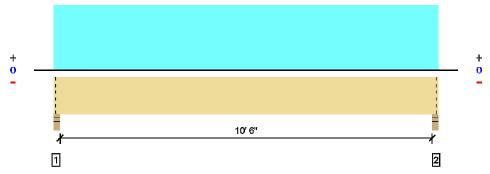

All locations are measured from the outside face of left support (or left cantilever end). All dimensions are horizontal.

Design Results	Actual @ Location	Allowed	Result	LDF	Load: Combination (Pattern)
Member Reaction (lbs)	2857 @ 2"	4961 (3.50")	Passed (58%)		1.0 D + 1.0 L (All Spans)
Shear (lbs)	2196 @ 1' 3 3/8"	7897	Passed (28%)	1.00	1.0 D + 1.0 L (All Spans)
Moment (Ft-lbs)	7446 @ 5' 6 1/2"	17848	Passed (42%)	1.00	1.0 D + 1.0 L (All Spans)
Live Load Defl. (in)	0.125 @ 5' 6 1/2"	0.358	Passed (L/999+)		1.0 D + 1.0 L (All Spans)
Total Load Defl. (in)	0.179 @ 5' 6 1/2"	0.538	Passed (L/720)		1.0 D + 1.0 L (All Spans)

System : Floor Member Type : Drop Beam Building Use : Residential Building Code : IBC Design Methodology : ASD

• Deflection criteria: LL (L/360) and TL (L/240).

· Bracing (Lu): All compression edges (top and bottom) must be braced at 11' 1" o/c unless detailed otherwise. Proper attachment and positioning of lateral bracing is required to achieve member stability.

	Bearing Length			Loads to Supports (lbs)			
Supports	Total	Available	Required	Dead	Floor Live	Total	Accessories
1 - Stud wall - HF	3.50"	3.50"	2.02"	862	1995	2857	Blocking
2 - Stud wall - HF	3.50"	3.50"	2.02"	862	1995	2857	Blocking

• Blocking Panels are assumed to carry no loads applied directly above them and the full load is applied to the member being designed.

Loads	Location	Tributary Width	Dead (0.90)	Floor Live (1.00)	Comments
1 - Uniform (PSF)	0 to 11' 1"	12'	12.0	30.0	Residential - Sleeping Areas

Member Notes

Roland Residence 26 Woodvale st. Portland, Me.

Weyerhaeuser Notes

Weyerhaeuser warrants that the sizing of its products will be in accordance with Weyerhaeuser product design criteria and published design values. Weyerhaeuser expressly disclaims any other warranties related to the software. Refer to current Weyerhaeuser literature for installation details. (www.woodbywy.com) Accessories (Rim Board, Blocking Panels and Squash Blocks) are not designed by this software. Use of this software is not intended to circumvent the need for a design professional as determined by the authority having jurisdiction. The designer of record, builder or framer is responsible to assure that this calculation is compatible with the overall project. Products manufactured at Weyerhaeuser facilities are third-party certified to sustainable forestry standards.

The product application, input design loads, dimensions and support information have been provided by Forte Software Operator

Forte Software Operator	Job Notes
Chris Burnett Hammond Lumber Company (207) 495-1234 cburnett@hammondlumber.com	

SUSTAINABLE FORESTRY INITIATIVE

11/24/2014 12:54:20 PM

Forte v4.6, Design Engine: V6.1.1.5