

ROXUL

The Better Insulation

Wall Insulation

Technical Product Information

BOARD INSULATION 07210

RHT 80

Architectural/OEM

General Product Information:

ROXUL products are mineral wool fibre insulations made from basalt rock and steel slag. This combination results in a non-combustible product with a melting point of approximately 2150°F (1177°C), which gives it excellent fire resistance properties. ROXUL mineral wool is a water repellent yet vapour permeable material. It absorbs water only when water is pressed or forced into the material and once the pressure is relieved, the water will evaporate without any loss of integrity to the material's shape or insulating properties.

All ROXUL products are certified to carry the Environmental Choice logo.



Description & Common Applications:

The RHT 80 product is a non-combustible, rigid mineral wool insulation board that is water repellent and delivers exceptional life cycle performance and value in a diversity of thermal, acoustic and fire protection applications. RHT 80's excellent moisture resistance, non-combustibility and dimensional stability make it the ideal choice for curtain wall applications. The product can be specified with confidence in a variety of building envelope designs, parking garages, acoustic and OEM applications.

Compliance and Performance

ASTM C 612 CAN/CSG 51.10-92 IA Approval	Mineral Fiber Block and Board Thermal Insulation Mineral Fibre Board Thermal Insulation New York City Approval	Type IV, Complies Type 1, Class 4 332-97-M
Fire Performance ASTM E 136 CAN4 S114 UL 723 (ASTM E 84) CAN/ULC S102	Behaviour of Materials at 750°C (1382°F) Test for Non-Combustibility Surface Burning Characteristics Surface Burning Characteristics	Non-Combustible Non-Combustible Flame Spread = 0 Smoke Developed = 0 Flame Spread = 0 Smoke Developed = 0
Maximum Service Temperature ASTM C 411	Hot Surface Performance	No Reaction @ 1200°F (650°C)
Dimensional Stability ASTM C 356	Linear Shrinkage	1.24% @ 1200°F (650°C)
Moisture Resistance ASTM C 1104	Moisture Sorption	0.04%
Corrosion Resistance ASTM C 665 ASTM C 795 ASTM C 871	Corrosiveness to Steel For use with Austenitic Stainless Steel Chemical Analysis	Passed No Reaction Passed
Thermal Resistance ASTM C 518 (C 177)	R-value @ 75°F (24°C) K-value @ 75°F (24°C)	4.2/inch 0.24 Btu.in/R ² .hr.°F


Supersedes: 11 January 1999
Revised: 23 April 1999

Access Doors— High Temp

Access Doors For Round and Flat Duct Work

Specifications

- Tested to 20" w.g., with no leakage noted.
- Available in 10x6 and 16x12.
- Metal Thickness: 10x06 16 ga. Black iron
- 16x12 16 ga. Black iron
- Ceramic fiber rope (1,000° max) or ceramic fiber gasket (2,300°, Meets NFPA 96) ensures an air tight seal
- Zinc coated wing nuts are easily turned by hand
- Self adhesive template is provided for easy installation.
- Zinc coated conical springs installed between the inner and outer door.

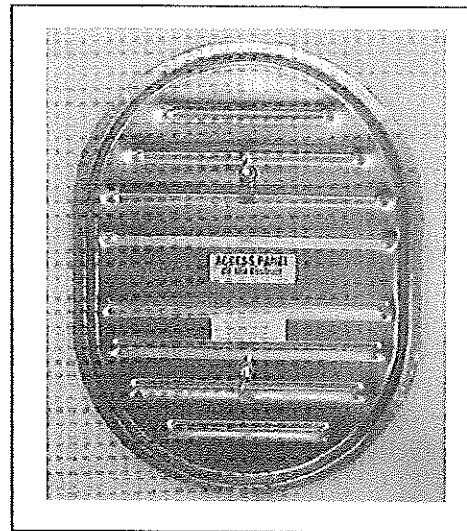


Packaging

- Access Doors are sold as single units.

Profile

- Available sizes: 10x06 Flat
- 16x12 Flat
- 10x06x 6" through 30"
- 16x12x 18" through 60"

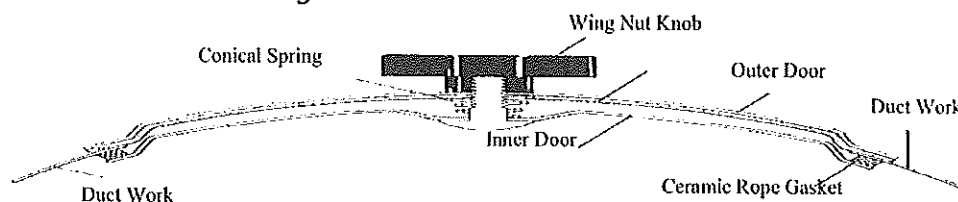

Installation Instructions

1. Adhere self adhesive template to ductwork.
2. Using a pair of sheet metal snips, cut out the template.
3. Unscrew knobs of door and insert into the opening
4. Tighten knobs.

W
C.L. WARD
 & FAMILY INC.



888.973.7600
 www.clward.com