



**Two Pipe System**

Two pipe system (room air independent) horizontally vented

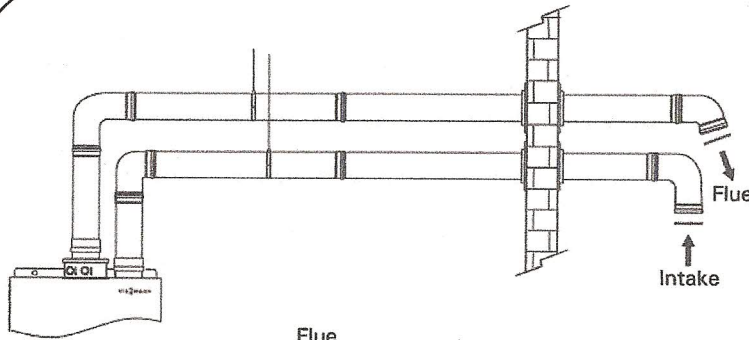

Vent system diameter (in)	2*	3	4
Maximum equivalent length ft. (m)	86 (20)	164 (50)	200 (61)


\*stainless steel is not available in 2"  
 Combustion air: CPVC, PVC, ABS and stainless steel (field supplied)  
 Flue gas: CPVC and stainless steel (field supplied)  
 PP(s): (Viessmann supplied)

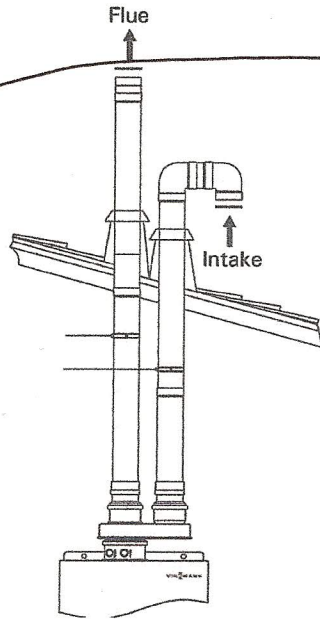

Two pipe system (room air independent) vertically vented

Vent system diameter (in)	2*	3	4
Maximum equivalent length ft. (m)	86 (20)	164 (50)	200 (61)

\*stainless steel is not available in 2"  
 Combustion air: CPVC, PVC, ABS and stainless steel (field supplied)  
 Flue gas: CPVC and stainless steel (field supplied)  
 PP(s): (Viessmann supplied)

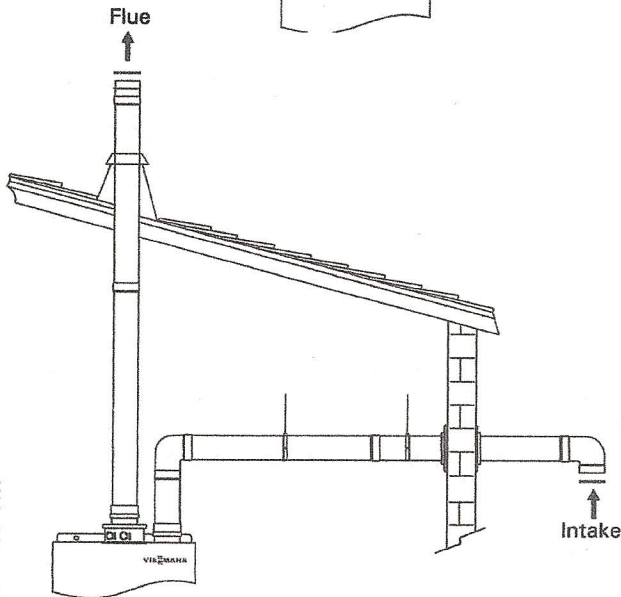

Two pipe system (room air independent) hybrid

Vent system diameter (in)	2*	3	4
Maximum equivalent length ft. (m)	86 (20)	164 (50)	200 (61)

\*stainless steel is not available in 2"  
 Combustion air: CPVC, PVC, ABS and stainless steel (field supplied)  
 Flue gas: CPVC and stainless steel (field supplied)  
 PP(s): (Viessmann supplied)

5601 189 v1.1