



USA

SANYO North America Corporation



Wall Mounted Heat Pump

18KHS72

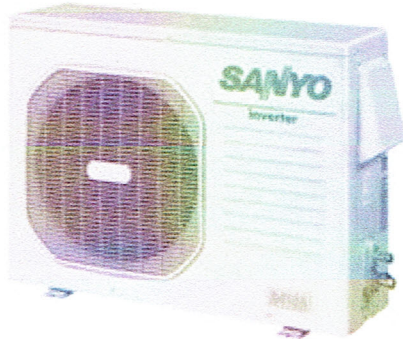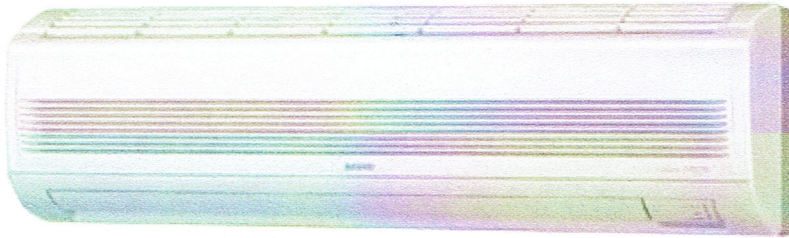

Overview **Specifications** **Features** **Resources** **Dealer Images**

Model No. 18KHS72

Unit Model No. Indoor Unit: **KHS1872**
Outdoor Unit: **CH1872**

Capacity (Btu/h) Cooling: 17,500 (4,000~17,500)
Heating: 20,400 (4,400~20,400)

Moisture Removal High (Pints/H) 4.89

Dry Air Flow - Hi / Med / Low (CFM) 417 / 479 / 524

SEER (Cooling)	20
EER (Cooling)	11.7
HSPF (Heating)	10.0
Power Supply - V, Phase (Hz)	230/208V, 1PH, 60Hz
Running Amps	Cooling: 7/7.7 (1.2~7.7) Heating: 7.4/8.1 (1.3~8.1)
Power Input (W)	Cooling: 1,500/1,500 (250~1,500) Heating: 1,575/1,575 (270~1,575)
Back-up Heater (kW)	---
Fuse or Circuit Breaker Capacity (A)	20
Controls	Microprocessor
Low Ambient Control	---
Wireless Remote Controller	Included
Fan Speeds	High / Med / Low & Auto
Timer	1hr OFF and 24-hr PROGRAM
Air Deflection	Horizontal: Manual Vertical: Automatic
Air Filter (dB-A)	Washable
Refrigerant (dB-A)	R-410A
Refrigerant Control	Electric Expansion Valve
Operation Sound (dB-A)	Indoor (Hi / Med / Low): 42 / 38 / 30 / 28 Outdoor (Hi): 51-52
Refrigerant Piping	Flare Type 1/4" Discharge 1/2" Suction
Refrigerant Pipe Length	Max. 98Ft.
Elevation	Outdoor Above: Max. 50Ft.

Difference* Outdoor Below: Max. 50Ft.

Height Indoor Unit: 11-23/32"
Outdoor Unit: 26-3/8"

Width Indoor Unit: 41-15/16"
Outdoor Unit: 34-21/32"

Depth Indoor Unit: 8-19/32"
Outdoor Unit: 11-7/32"

Net Weight Indoor Unit: 26.5 lbs.
Outdoor Unit: 97.0 lbs.

*This is maximum elevation difference when the indoor unit is located above the outdoor unit.

Copyright © 2014 Sanyo North America Corporation, All rights reserved.

Panasonic USA



- [About Panasonic](#)
- [Career Opportunities](#)
- [Panasonic Eco Ideas](#)
- [Corporate Social Responsibility](#)
- [For Investors](#)

Copyright © 2013 Panasonic Corporation of North America. All rights reserved. | [Privacy Policy](#)