

A-B.E.S.T. Window

South Portland (207) 799-6771 • Brunswick (207) 729-0777 • Kennebunk (207) 985-8889
1199 Broadway, South Portland, Maine 04106
www.abestwindow.com

March 29, 2017

Mark Metcalf
224 Spring Street
Portland, ME 04102
mmetcalf@crefco.com
329-3158

7-White A-Best vinyl replacement windows furnished and installed. Price includes: Low-E glass, ½ locking screens, removal and disposal of old windows plus insulation. Our custom Maine-made window comes with a 20-year comprehensive warranty. No grids.

List Price	\$ 3800
Sale Discount	- <u>950</u> (buy 3, get the 4 th free)
	2850
Spring Fever	- <u>285</u> (Good through April 1 st)
Total Installed Price	\$2,565

At this time, we are **approximately** 4-6 weeks from receipt of deposit to time of installation. We require a deposit of one-half with balance due upon completion.

Lindsay Soule McAllister
A-BEST Window, Inc.
Phone: (207) 799-6771

A-B.E.S.T. Window

South Portland (207) 799-6771 • Brunswick (207) 729-0777 • Kennebunk (207) 985-8889
1199 Broadway, South Portland, Maine 04106
www.abestwindow.com

Poly-Tex 3500 double hung, vinyl frame, double glazed, Low-E coating (e=0.159, S3), Argon/air filled.


Energy Performance Ratings:

U-Factor (U.S./I-P) **0.35**

Solar Heat Gain Coefficient **0.55**

Additional Performance Rating:

Visible Transmittance **0.56**

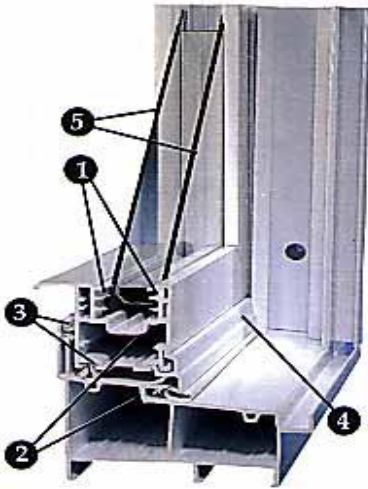

1. Air Infiltration Control. Unique, molded-in, flexible vinyl ridges hold the glass firmly in place while allowing the glazing to adjust to changing temperatures. This provides superior resistance to air infiltration.

2. Multi-Chambered Construction. Sash and frame design creates internal insulating air spaces. Window strength and durability are increased and your home is quieter, and more comfortable.

3. Dual Weatherstripping Continuous, double wool pile surrounds the sash preventing drafts and cold spots while enhancing comfort and energy efficiency.

4. Extra-Strong Corners. Our "corner-key" construction precisely joins and locks sash components to create smooth and attractive corners that stop air infiltration.

5. High-Efficiency Glazing. The Poly-Tex windows 7/8" glazing is 25% thicker than glazing in most new home windows.

Weather-Tight Locking System. This innovative design securely locks your Poly-Tex 3500 windows while pulling the sash together for a superior weathertight seal.

Trouble-Free Balance System. The Strength and simplicity of our stainless steel balance assures a lifetime of smooth, quiet operation.

ENERGY STAR[®] Qualified
in Highlighted Regions




ENERGY STAR

• Qualified



National Fenestration
Rating Council[®]
CERTIFIED

PORTLAND WINDOW CO.
3500 Double Hung
Vinyl frame, Double glazed,
Low E coating (e=0.159, S3),
Argon/air filled

PRT-K-1-00001

ENERGY PERFORMANCE RATINGS

U-Factor (U.S./A-P)	Solar Heat Gain Coefficient
0.35	0.55

ADDITIONAL PERFORMANCE RATINGS

Visible Transmittance	<i>0.85</i>
0.56	<i>R-Factor</i>

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information. www.nfrc.org

Windows to be installed sizes:

- 2- 33 ¼ X 68 ½ No Grids
- 2- 48 ¼ X 68 ½ No Grids
- 2- 24 ¼ X 68 ½ No Grids
- 1- 48 ¼ X 68 ½ No Grids

Lindsay Soule McAllister
A-BEST Window, Inc.
Phone: (207) 799-6771