


City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction: 657 Warren Ave. Portland 04102		Owner: Turner Barker Assoc.		Phone: (207) 772-9680		Permit No: 990491	
Owner Address: 657 Warren Ave, Portland 04102		Lessee/Buyer's Name: Radall Akers		Phone:		Business Name: Carpet & Rug Depot	
Contractor Name:		Address:		Phone:		Permit Issued: MAY 18 1999	
Past Use: Retail		Proposed Use: Same		COST OF WORK: \$ 1,000.00		PERMIT FEE: \$35.00	
				FIRE DEPT. <input checked="" type="checkbox"/> Approved <input type="checkbox"/> Denied		INSPECTION: Use Group: Type:	
Proposed Project Description: Erect Sent/ Temporary				Signature: <i>[Signature]</i>		Signature: <i>[Signature]</i>	
Permit Taken By: S.P.		Date Applied For: May 12th, 1999		PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: Approved <input type="checkbox"/> Approved with Conditions: <input type="checkbox"/> Denied <input type="checkbox"/>		Zoning Approval: Special Zone or Reviews: <input type="checkbox"/> Shoreland <input type="checkbox"/> Wetland <input type="checkbox"/> Flood Zone <input type="checkbox"/> Subdivision <input type="checkbox"/> Site Plan maj <input type="checkbox"/> minor <input type="checkbox"/> mm <input type="checkbox"/>	
				Signature: _____ Date: _____		Zoning Appeal <input type="checkbox"/> Variance <input type="checkbox"/> Miscellaneous <input type="checkbox"/> Conditional Use <input type="checkbox"/> Interpretation <input type="checkbox"/> Approved <input type="checkbox"/> Denied	

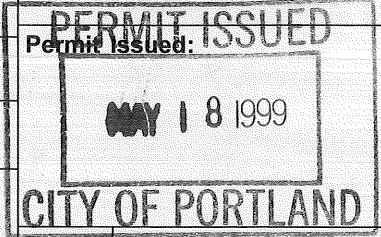

PERMIT ISSUED WITH REQUIREMENTS

1. This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules.
2. Building permits do not include plumbing, septic or electrical work.
3. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work..

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

May 13th, 1999

SIGNATURE OF APPLICANT _____ ADDRESS: _____ DATE: _____ PHONE: _____

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE _____ PHONE: _____

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector



COMMENTS

9/14/99

Completed.

[Signature]

[Large handwritten mark]

Inspection Record

	Type	Date
Foundation:	_____	_____
Framing:	_____	_____
Plumbing:	_____	_____
Final:	_____	_____
Other:	_____	_____

BUILDING PERMIT REPORT

DATE: 14/MAY/99 ADDRESS: 657 Warren Ave. CBL: 315-A-001

REASON FOR PERMIT: Temporary Test

BUILDING OWNER: Turner Baker Assoc.

PERMIT APPLICANT: Contractor Radall Akers

USE GROUP U BOCA 1996 CONSTRUCTION TYPE _____


CONDITION(S) OF APPROVAL

This permit is being issued with the understanding that the following conditions are met:

Approved with the following conditions: *1 *2.7 *34

- X 1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
3. Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2
4. Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' o.c. between bolts. (Section 2305.17)
5. Waterproofing and damp proofing shall be done in accordance with Section 1813.0 of the building code.
6. Precaution must be taken to protect concrete from freezing. Section 1908.0
7. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
8. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1996)
9. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211
10. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.
11. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2, M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2". (Sections 1021 & 1022.0) - Handrails shall be on both sides of stairway. (Section 1014.7)
12. Headroom in habitable space is a minimum of 7'6". (Section 1204.0)
13. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use Group minimum 11" tread, 7" maximum rise. (Section 1014.0)
14. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4
15. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.6)
16. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)
17. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) (Section 710.0)

18. The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)
19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 &19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements
 In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.
20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
21. The Fire Alarm System shall maintained to NFPA #72 Standard.
22. The Sprinkler System shall maintained to NFPA #13 Standard.
23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1996)
24. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
26. Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
- X 27. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done.
28. All requirements must be met before a final Certificate of Occupancy is issued.
29. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building Code/1996).
30. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). (Chapter M-16)
31. Please read and implement the attached Land Use Zoning report requirements.
32. Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
33. Glass and glazing shall meet the requirements of Chapter 24 of the building code.
- X 34. All vent over 120 sq. ft. in area must meet the requirements of section 3104.2 of The City's bldg. Code, (The BOCA National Building Code 1996).
35. _____
36. _____


 P. Schmidt, Building Inspector
 cc: Lt. McDougall, PFD
 Marge Schmuckal, Zoning Administrator

PSH 12-14-98

**On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

**Building or Use Permit Pre-Application
Attached Single Family Dwellings/Two-Family Dwelling
Multi-Family or Commercial Structures and Additions Thereto**

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTEIf you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.**

Location/Address of Construction (include Portion of Building): <u>657 Warren Ave 04102</u>			
Total Square Footage of Proposed Structure <u>30x50 1500s.f.</u>		Square Footage of Lot <u>45,100</u>	
Tax Assessor's Chart, Block & Lot Number Chart# <u>315</u> Block# <u>A</u> Lot# <u>001</u>		Owner: <u>Turner Barber Assoc</u> Radall Akers	Telephone#: <u>772-9680</u>
Owner's Address: <u>Carpet Plug Depot</u> <u>657 WARREN AVE Portland ME 04102</u>		Lessee/Buyer's Name (If Applicable) <u>Radall Akers</u>	Cost Of Work: \$1,000 Fee <u>\$35</u>
Proposed Project Description: (Please be as specific as possible) <u>30x50 TENT - Temporary for Tent Sale</u> <u>5/14/99 - 9/1/99</u>			
Contractor's Name, Address & Telephone <u>Self.</u>			Rec'd By <u>[Signature]</u>
Current Use: <u>RETAIL SALES CARPET/PARKING</u>		Proposed Use: <u>SAME</u>	

Separate permits are required for Internal & External Plumbing, HVAC and Electrical installation.

- All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II.
- All plumbing must be conducted in compliance with the State of Maine Plumbing Code.
- All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III.
- HVAC (Heating, Ventilation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code.

You must include the following with your application:

- 1) A Copy of Your Deed or Purchase and Sale Agreement
- 2) A Copy of your Construction Contract, if available
- 3) A Plot Plan/Site Plan

Minor or Major site plan review will be required for the above proposed projects. The attached checklist outlines the minimum standards for a site plan.

4) Building Plans

Unless exempted by State Law, construction documents must be designed by a registered design professional.

A complete set of construction drawings showing all of the following elements of construction:

- Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)
- Floor Plans & Elevations
- Window and door schedules
- Foundation plans with required drainage and damp proofing
- Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.


Certification

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

Signature of applicant: <u>[Signature]</u>	Date: <u>5-11-99</u>
--	----------------------

Building Permit Fee: \$25.00 for the 1st \$1000. cost plus \$5.00 per \$1,000.00 construction cost thereafter.

Additional Site review and related fees are attached on a separate addendum

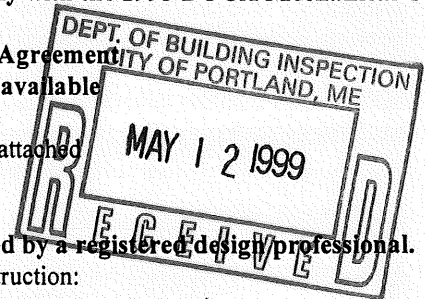



Inspection Services
Michael J. Nugent
Manager

Department of Urban Development
Joseph E. Gray, Jr.
Director

CITY OF PORTLAND

congratulations!!!!

0800-57

2003/1/15


**Building or Use Permit Application
Attached Single Family Dwellings/Two-Family Dwelling
Multi-Family or Commercial Structures and Additions Thereto**

As an applicant for a building permit, you are about to enter into a relationship with our Office. We welcome any questions, comments or suggestions that will make the process more efficient. Attached you will find an application and some samples of the submissions you will provide at application time. Please read **ALL** of the information and if you need any further assistance please call 874-8703 or 874-8693.

Minor or Major site plan review will be required for the most of the above proposed projects.



2-15-93

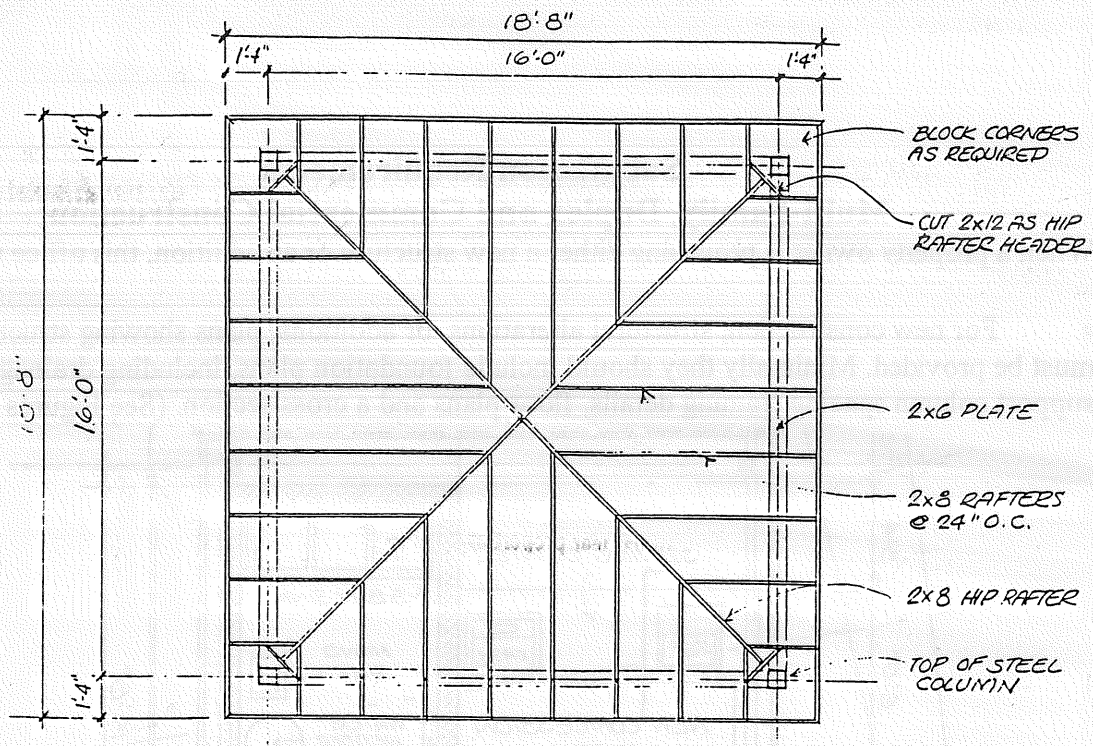

ROOF FRAMING PLAN

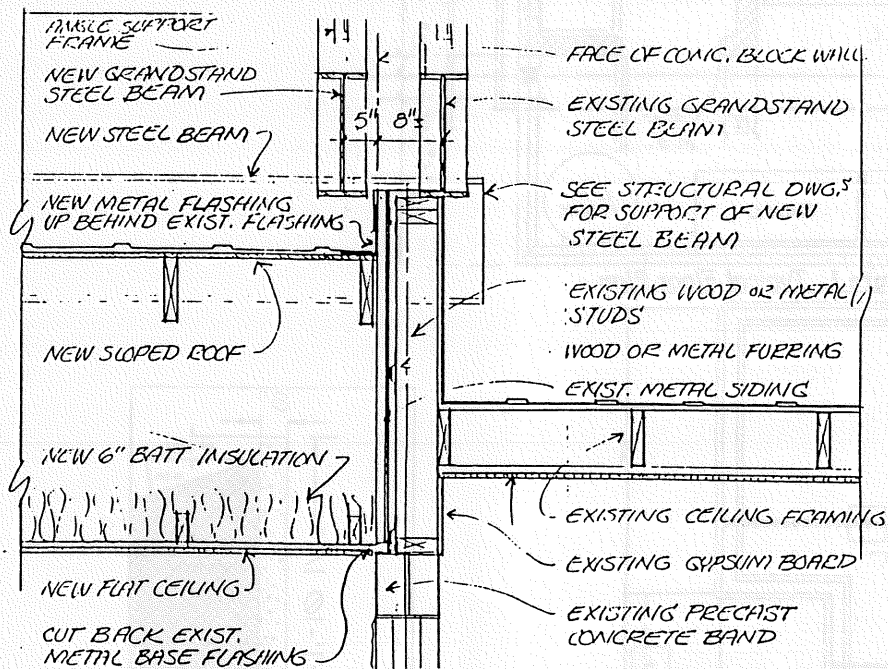


Figure 3. Typical Framing and Cross Section

These plans are all done by professionals, If your project is listed in the attached exemptions, you can prepare your own plans. For all other projects except those exempted, a Design Professional must prepare any construction documents. When proposing an addition, similar plans are required, the same goes for a detached garage or an attached deck.

Submission Requirements Multi-Family, Duplex and Commercial Construction

When a property owner is proposing either a new structure or an addition, this office requires:

- For new construction, structural alterations, or additions, plans showing structural details must be provided. Minimally they should include foundation plans, including drainage and support column spacing framing details, floor plans and a cross section. (See Figures 1, 2 & 3)

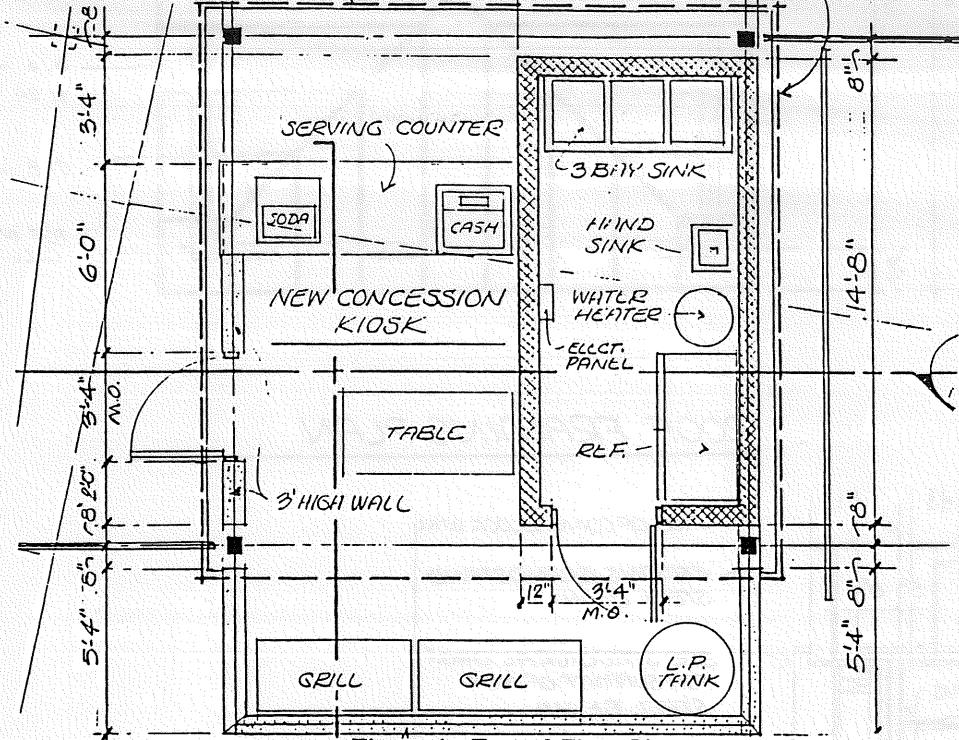


Figure 1. Typical Floor Plan



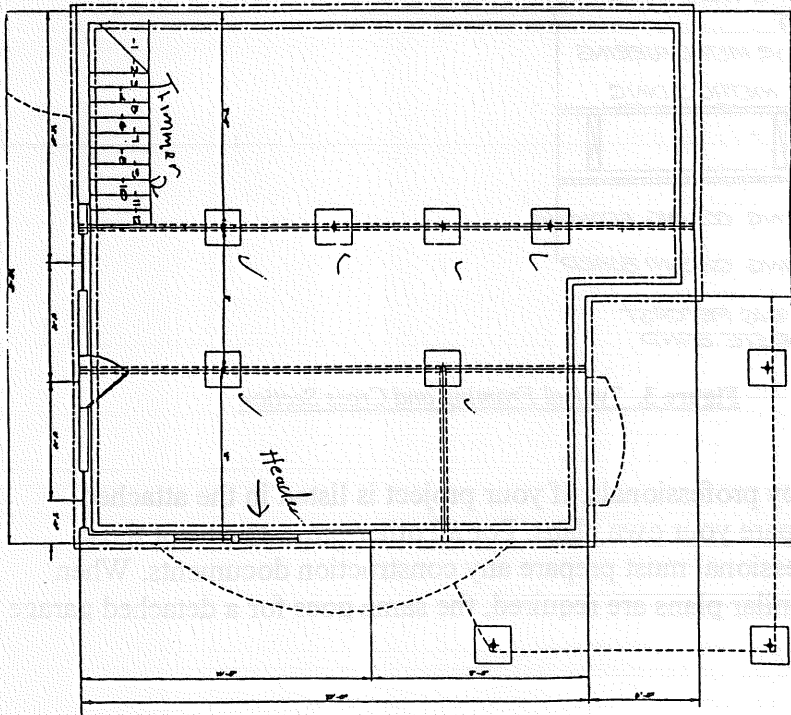


Figure 2. Typical Foundation Plan

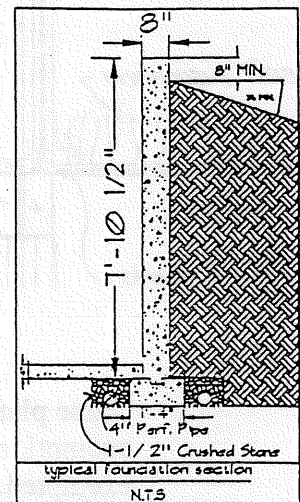

CARPET + RUG DEPOT TENT SALE.

RIVERSIDE

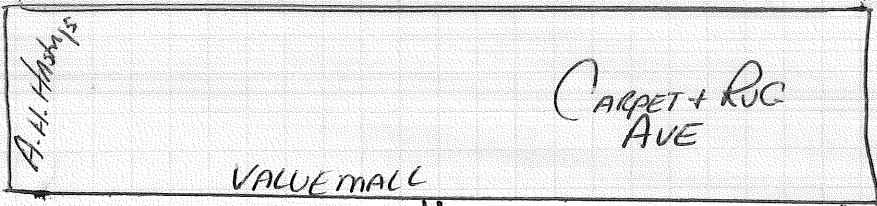


75' FROM BLDG



150'

300'

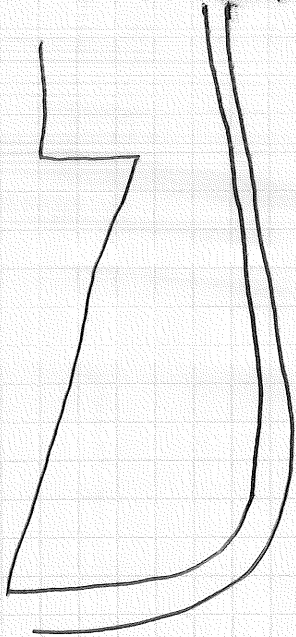

WILMINGTON AVE

HOME DEPOT

The following State law governs technical submission requirements for building plans as well as site development. The law explains the *exemptions*, please read it CAREFULLY and our staff will answer any question that you may have.

2. Technical submissions; construction or development. Nothing in this chapter may be construed to prevent any person from preparing technical submissions for, or administering construction contracts in, the erection, construction or development of:

- A. Detached single or 2-family dwellings, including those to be utilized for home occupations, as defined by local ordinances, and sheds, storage buildings and garages incidental to the dwellings; [1991, c. 874, §3 (amd).]
- B. Farm buildings, including barns, silos, sheds or housing for farm equipment and machinery, livestock, poultry or storage, if the structures are designed to be occupied by no more than 10 persons; [1991, c. 874, §3 (amd).]
- C. Alterations, renovations or remodeling of a building when the cost of the work contemplated by the design does not exceed 15% of the assessed value of the building or \$50,000, whichever is the lesser, or does not require the issuance of a permit under applicable building codes or when the work involves those structures as provided in paragraphs A, B, F, G and H or when the work involves interior design services performed by a certified interior designer; [1993, c. 680, Pt. A, §28 (rpr).]
- D. [1991, c. 396, §21 (rp).]
- E. [1991, c. 396, §21 (rp).]
- F. Buildings that do not have as their principal purpose human occupancy or habitation; [1991, c. 874, §4 (new).]
- G. Single-story, above-grade buildings of less than 1,000 square feet that are designed to be occupied by no more than 10 persons; and [1991, c. 874, §4 (new).]
- H. Preengineered manufactured buildings. For the purposes of this section, "preengineered manufactured building" means a structural unit, other than a dwelling, that is designed by a person licensed as an engineer in the State and is constructed in a manufacturing facility. [1991, c. 874, §4 (new).]
[1993, c. 680, Pt. A, §28 (amd).]

Section History:

1977, c. 463, § 3 (NEW). 1991, c. 396, § 21 (RPR). 1991, c. 874, § 2-4 (AMD). 1993, c. 349, § 65 (AMD). 1993, c. 389, § 16-18 (AMD). 1993, c. 680, § A28 (AMD).

32 § 227. Enforcement

It shall be the duty of all duly constituted law enforcement officers of the State and all political subdivisions thereof to enforce this chapter and to prosecute any persons violating this chapter. [1977, c. 463, § 3 (new).]

Section History:

1977, c. 463, § 3 (NEW).

32 § 228. Penalties

Violation of any provision of this chapter shall be a Class E crime punishable by a fine of not less than \$100 nor more than \$500, or by imprisonment for not more than 3 months, or by both. [1977, c. 463, § 3 (new).]

The State may bring an action in Superior Court to enjoin any person from violating this chapter, regardless of whether proceedings have been or may be instituted in the Administrative Court or whether criminal proceedings have been or may be instituted. [1983, c. 413, § 12 (new).]

Section History:

1977, c. 463, § 3 (NEW). 1983, c. 413, § 12 (AMD).

NOVA-THENE®

WOVEN POLYOLEFIN FABRICS


FRU88X-6

DEVELOPMENT PRODUCT DATA SHEET

Heavyweight fabric for applications requiring flame retardancy and UV stability, such as alternate daily landfill covers. It incorporates a special weave pattern to enhance thickness, flatness, and abrasion resistance. It has exceptional tear properties. Special additives are also included to enhance fabric UV stability.

FABRIC SPECIFICATIONS

WEAVE	Nominal 16 by 16 ppi woven flame retardant HDPE scrim using natural FR 1600 denier tapes
COATING	2.75 mil average each side (65 g/m ² /side)
COLOUR	white/silver
WEIGHT	10.5 oz/yd ² (355 g/m ²) +/- 5%
THICKNESS	20 mils - ASTM D5199



PERFORMANCE

GRAB TENSILE	Warp 310 lbs	Weft 310 lbs	ASTM D3034
TONGUE TEAR	Warp 125 lbs	Weft 125 lbs	ASTM D2261
MULLEN BURST	600 psi		ASTM D3786
ACCELERATED UV WEATHERING ¹	> 80 % strength retention after 2000 hrs		ASTM G53

¹ Q.U.V. (A-340 lamps): 8 hrs UV @ 60 °C : 4 hrs condensation @ 50 °C

FR RATING

This product conforms to CPAI-84, Sect. 6 and 7, ASTM E84, UL214 and CAN/ULC 8109 (small and large scale).

ROLL SPECIFICATIONS

CORES	4 inch I.D.
WIDTH	Up to 150 inches (-0, + 0.5) as ordered
LENGTH	Minimum 250 yds/roll (app. 650 lbs/roll @ 144"); up to 2000 yds/roll

intertape polymer group

SC 18/12/97 fru88x-6.doc

P.O. Box 888, 50 Abbey Avenue, Truro, Nova Scotia, Canada B2N 5G6 Tel: (902) 895-1668 FAX: (902) 893-4790

United States Testing Company, Inc.

CLIENT :

NUMBER: 101202

TEST RESULTS:

Sample: F221W

<u>Specimen</u>	<u>Direction</u>	<u>Dimensions, Inches</u>	<u>Char Length, Inches</u>	<u>Afterburn, Seconds</u>
1	Machine	25 x 84	5	0
2	Machine	25 x 84	1	0
3	Cross Machine	25 x 84	1	0
4	Cross Machine	25 x 84	0	0

Observations: Charring, melting, shrinking, drippings.

REQUIREMENTS:

A material tested in folds shall not continue flaming for one than two seconds after the test flame is remove. The vertical spread of burning shall not exceed 35 inches above the tip of the test flame. Portions of residue of textiles or films which break or drip from the test specimen shall not continue to flame after they reach the floor of the tester.

CONCLUSION:

The submitted sample meets the requirements when tested per N.F.P.A. 701 (Folds) as indicated above.

United States Testing Company, Inc.**CLIENT:****NUMBER: 101202****TEST RESULTS: (cont'd)****Sample: PR7W**

<u>Specimen</u>	<u>Direction</u>	<u>Dimensions, Inches</u>	<u>Char Length, Inches</u>	<u>Afterburn, seconds</u>
1	Machine	25 x 84	3	0
2	Machine	25 x 84	2	0
3	Cross Machine	25 x 84	3	0
4	Cross Machine	25 x 84	3	0

Observations: Charring, melting, shrinking, drippings.**REQUIREMENTS:**

A material tested in folds shall not continue flaming for one than two seconds after the test flame is remove. The vertical spread of burning shall not exceed 35 inches above the tip of the test flame. Portions of residue of textiles or films which break or drip from the test specimen shall not continue to flame after they reach the floor of the tester.

CONCLUSION:

The submitted sample meets the requirements when tested per N.F.P.A. 701 (Folds) as indicated above.



United States Testing Company, Inc.

Engineering Services Division

291 FAIRFIELD AVENUE • FAIRFIELD NEW JERSEY 07004-0000 • 201-575-5252

REPORT OF TEST

CLIENT:

NUMBER: 101282

June 17, 1991

SUBJECT: Flammability

REFERENCE:

Polymer International, Purchase Order Number 106104-1 dated May 28, 1991.

SAMPLE IDENTIFICATION:

Two (2) samples of fabric were submitted and identified by the Client as:

- 1) FR213W
- 2) FR7W

TEST PERFORMED:

The submitted samples were tested for Flammability in accordance with the procedures outlined in N.F.P.A. 701 Large Scale Test (Folds).

Testing supervised by:

[Signature]
 Steve Calderola
 Senior Supervisor
 Fire Technology Section

SIGNED FOR THE COMPANY

BY *[Signature]*
 John Lonash
 Vice President

Page :
of :
14

Laboratories in: New York • Chicago • Los Angeles • Richmond • Tulsa • Modesto • Orlando

UNITED STATES TESTING COMPANY, INC. REPORTS AND LETTERS ARE FOR THE EXCLUSIVE USE OF THE CLIENT TO WHOM THEY ARE ADDRESSED AND THEY ARE THE PROPERTY OF THE UNITED STATES TESTING COMPANY, INC. NO PART OF THIS REPORT OR ANY INFORMATION CONTAINED HEREIN IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF THE UNITED STATES TESTING COMPANY, INC. THE TEST RESULTS ARE NOT INDICATIVE OF THE QUALITY OF THE LOT FROM WHICH THE SAMPLE WAS TAKEN OR OF APPARENTLY IDENTICAL OR SIMILAR LOTS. NOTHING CONTAINED IN OUR REPORTS SHALL BE DEPEND UPON OR RELY ON THAT UNITED STATES TESTING COMPANY, INC. CONDUCTS ANY QUALITY CONTROL PROGRAM FOR THE CLIENT TO WHOM THE REPORT IS ISSUED. QUALITY CONTROL IS NOT CONDUCTED IN TESTING AND REQUIRES A MAXIMUM OF THREE DAYS.