


Portland Yacht Service
100 W Commercial Street.
Portland Maine

Scope of Work:

- 1) Install 14' diameter globe and 20" high letter 'SERVICE' on face of building.
- 2) Install main entrance at office entrance.
- 3) Install 40'x5' 'Portland Yacht Service' sign on build face.

Overview:

Total purposed signage is would bring to overall complete job to 407 sq/ft on a building with 48000 sq/ft of main floor working space. All signage will be west on W.Commercial Steet and the main entry way in from said street.

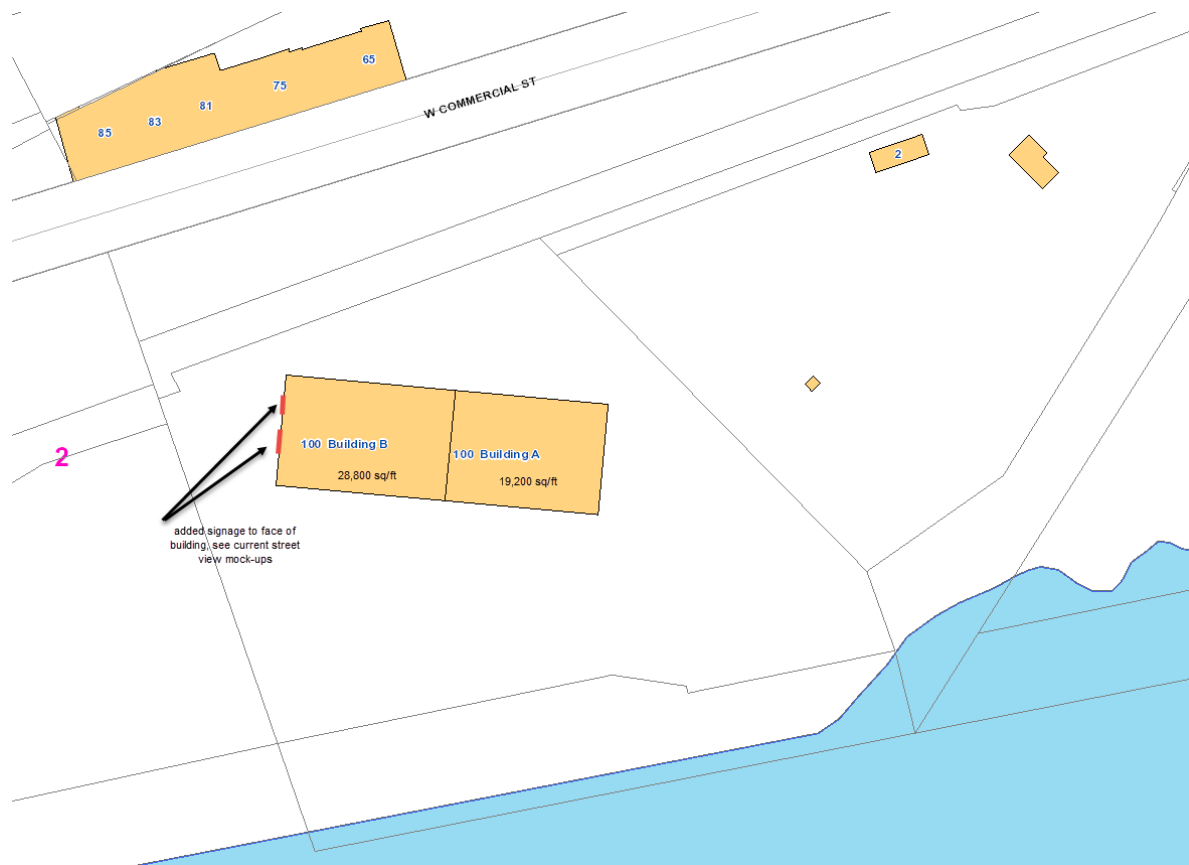

View from Google Earth



Current street view looking perpendicular from W. Commercial Street.



Current entry view from W. Commercial Street.



Purposed signs:

Purposed signs will be made of ¼ aluminum compost material fastened through the sign with flat head screws spaced approximately every 2 feet directly into the face of the steel sided building.

Mockup of Globe: The mockup shows the approx. placement of the 14' globe and the 20" lettering 'SERVICE'. In addition current office sign will be relocated and a new sign added below signifying Main Entrance and Parts



Mockup of company logo and name: The mockup shows the approx. location of the new sign of 5' x 40' long. The sign will be place on the front overhead door which is 48' x 50" wide.

