



FIXTURE TYPE: \_\_\_\_\_

WALL MOUNT  
1 or 2 PLC 13/18/26  
1 PLT 32/42


# VANDAL RESISTANT FLUORESCENT YOVH 13

## SPECIFICATIONS

- Housing** One piece injection molded UV stabilized polycarbonate secured to baseplate with (2) stainless steel TORX® head screws and sealed against moisture and contaminants with two high temperature silicone O-rings. Color is molded through entire part for scratch resistant finish.
- Lens** One piece injection molded UV stabilized prismatic polycarbonate with minimum 1/8" wall thickness. Available in clear or opal and secured to baseplate by housing and silicone O-rings.
- Reflector** Die formed heavy gauge specular aluminum, shaped for maximum efficiency.
- Baseplate** Pressure die cast marine grade aluminum. Chemically primed and finished with electrostatically applied polyester powder coat.
- Socket** High temperature thermo plastic, precision snap locked to specular reflector bracket for easy interchangeability.
- Ballast** Electronic microprocessor controlled high-frequency class P high power factor ballast. Ballast shall have less than 10% total harmonic distortion.
- Gasket** Closed cell die cut neoprene gasket provided between fixture baseplate and mounting surface.
- UL Listing** Wet location, 595.


## OPTIONS

- EMB** Emergency battery pack. Will operate one lamp for a minimum of 90 minutes. Self contained within fixture. CAB is required and included.
- CAB** Cast aluminum backbox. Provided with (5) 1/2" i.p.t. holes for conduit entry and 4 threaded plugs. Chemically primed and finished with electrostatically applied polyester powder coat.
- PC** Button type photoelectric switch. Requires CAB option.
- GLR** Fuse and fuse holder.

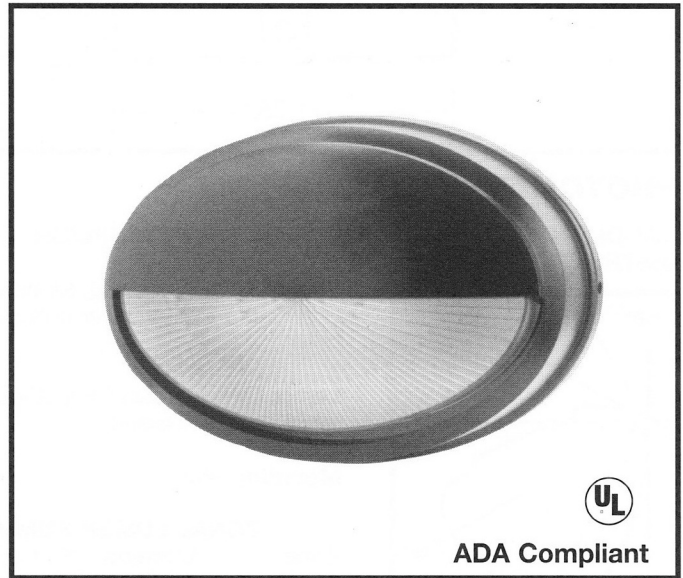


## OVERALL DIMENSIONS:

Front View

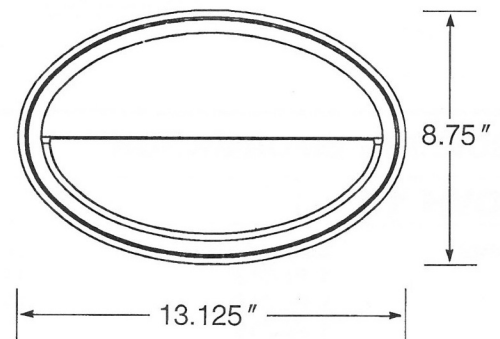

Side View

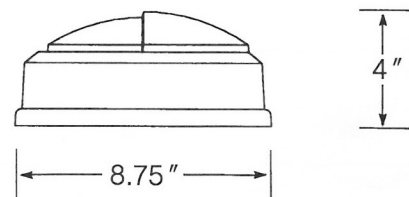

Patent Pending



[www.luminairelighting.com](http://www.luminairelighting.com)

7 Olsen Avenue ■ P.O. Box 2104 ■ Edison, New Jersey 08818 ■ Telephone (732) 549-0056 ■ FAX (732) 549-9737