



IN-SWING DOOR


PRODUCT SELECTION GUIDE

Size and Performance Data



	Clad
SIZES	
Standard door sizes	●
Standard transom sizes—Fixed Frame Direct Set	●
Standard Single-Swing Single Door Widths	
2' 6"	●
2' 10"	●
3'	●
3' 2"	●
Standard Single-Swing Double Door Widths	
5'	●
5'7"	●
6'	●
6' 3"	●
Standard Double-Swing Door Widths	
5'	●
5' 7"	●
6'	●
6' 3"	●
Standard Door Heights	
6' 8"	●
6' 10"	●
8'	●
OTHER PERFORMANCE CRITERIA	
Forced Entry Resistance Level (Minimum Security Grade) ₁	40

PERFORMANCE DATA ₂		
DOORS 8' TALL AND UNDER	Standard Sill - Non-Impact Glazing	
	Meets or Exceeds AAMA/WDMA Ratings	LC50 Hallmark Certified
	Air Infiltration (cfm/ft ² of frame @ 1.57 psf wind pressure)	0.15
	Water Resistance	7.5 psf
	Design Pressure	50 psf

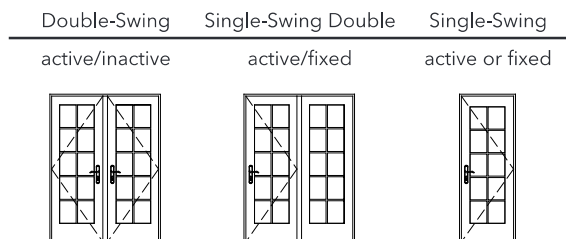

(-) = Not Available

(1) The higher the level, the greater the product's ability to resist forced entry. Valid only if Pella supplied locking system is used.

(2) Maximum performance for single unit when glazed with the appropriate glass thickness. Doors supplied without latching hardware are not AAMA/WDMA performance certified. See Design Data pages in this section for specific product performance class and grade values.



IN-SWING DOOR

PRODUCT SELECTION GUIDE

Size and Performance Data



STANDARD	OPTIONS / UPGRADES
GLAZING	
Glazing Type	
Dual-Pane Insulating Glass	–
Insulated Glass Options/Low-E Types	
Advanced Low-E	SunDefense™ Low-E
	AdvancedComfort Low-E
	NaturalSun Low-E
Additional Glass Options	
Tempered Glass	Obscure Glass ₂
Gas Fill/High Altitude	
Argon	High altitude (Air-filled only)
EXTERIOR	
EnduraClad® protective finish	–
Cladding Colors	
10 Standard colors ₁	–
Sill Finish	
Brown EnduraClad	Mill finish
INTERIOR	
Unfinished wood	Factory primed
	Factory prefinished paint ₁
	Factory prefinished stain ₁
WOOD TYPES	
Pine	–
HARDWARE	
Champagne, White or Brown	Bright Brass, Satin Nickel or Oil-Rubbed Bronze
LOCKING SYSTEM	
Multi-Point	–
Key lock	–
GRILLES	
Removable pine wood interior grilles	
–	Traditional
Grilles-Between-the-Glass	
–	Traditional, Prairie, Cross, Top Row ₁ , Custom-Equally Divided
Simulated Divided Light with Optional Spacer₂	
–	Traditional, Prairie, Cross, Top Row, Custom-Equally Divided
SCREENS	
–	InView™ screens

(1) Contact your local Pella sales representative for current designs and color options.

(2) Available with Low-E argon-insulated glass only.