




**GRAVEL DRIVE SECTION**  
NOT TO SCALE

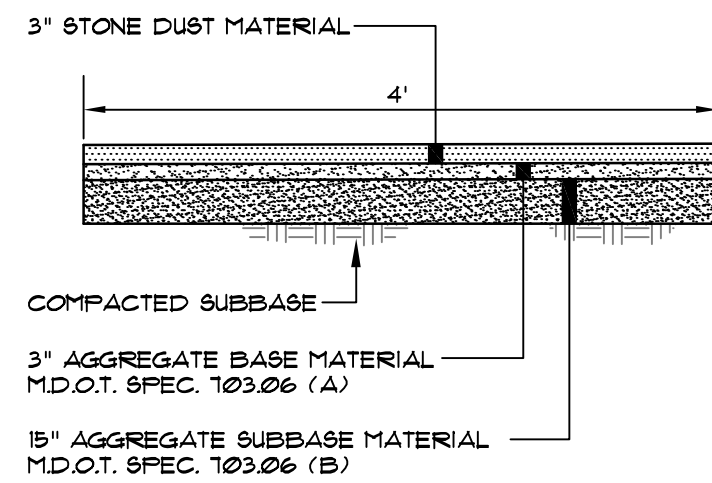


**STONE DUST WALK SECTION**  
NOT TO SCALE

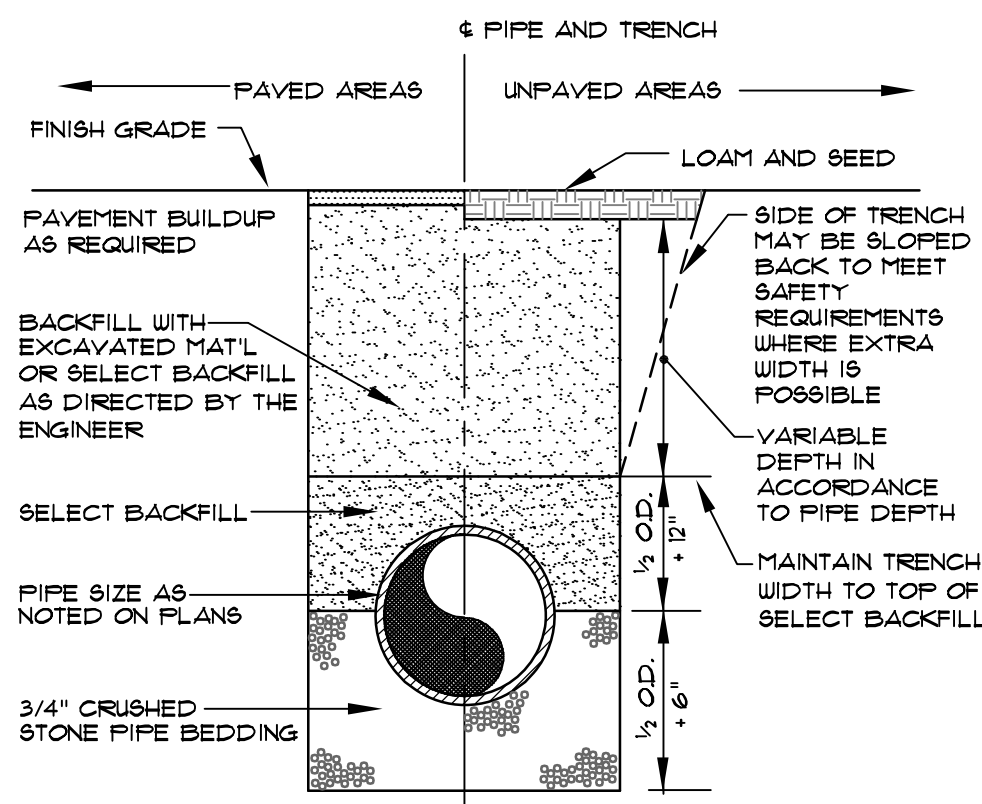

**TYPICAL TRENCH SECTION**  
NOT TO SCALE

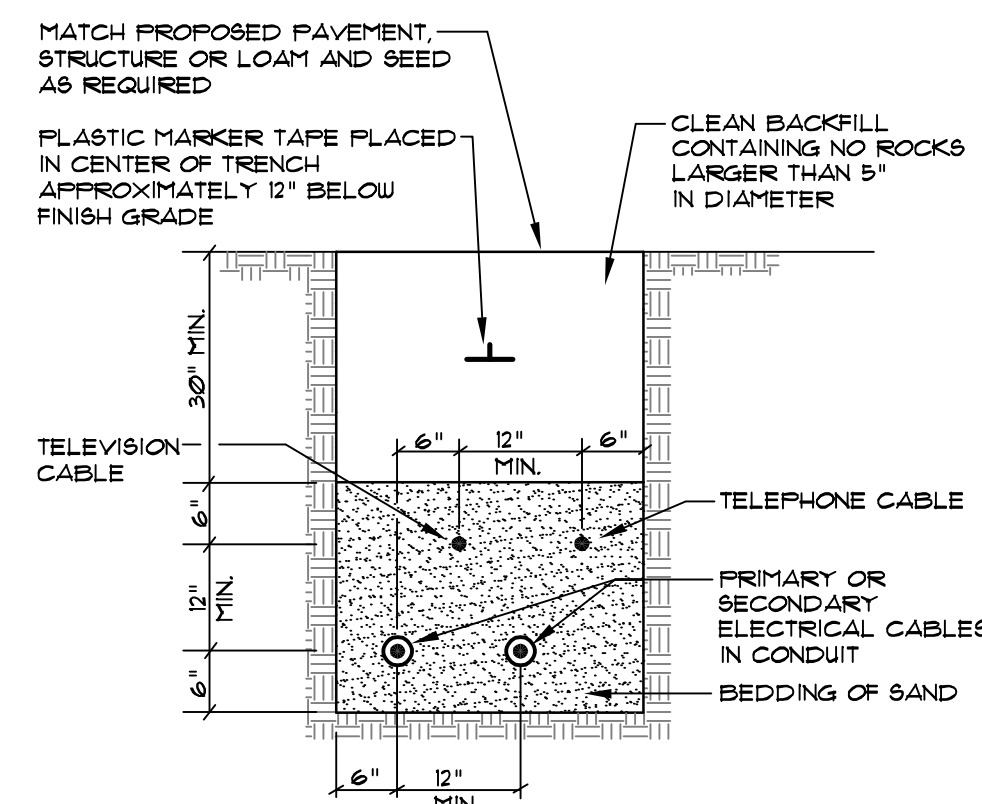


**TYPICAL UNDERGROUND CABLE INSTALLATION**  
NOT TO SCALE

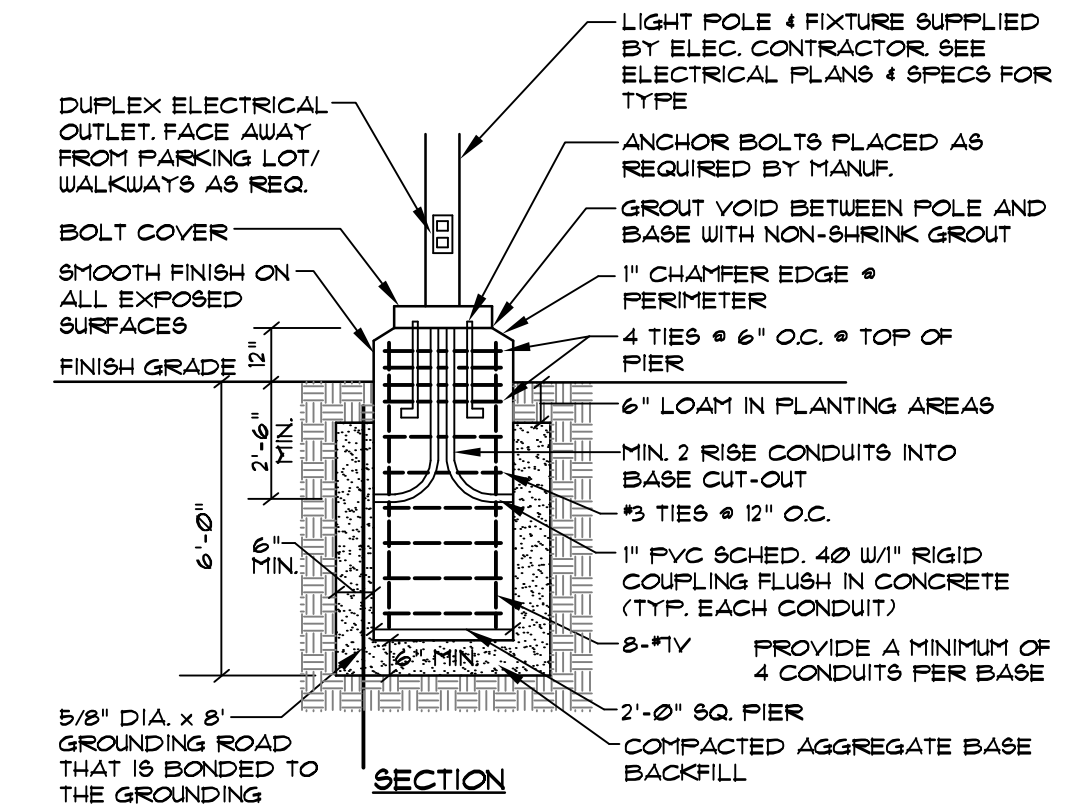


**LIGHT POLE BASE**  
NOT TO SCALE

- NOTES:**
1. CONCRETE  $f'c = 4000$  psi.
  2. REIN. STEEL GRADE 60 NEW BARS.
  3. CONCRETE 3/4" AGG. 6% ± ENTRAINED AIR.
  4. PROVIDE 2 COATS BITUMINOUS DAMPROOFING FOR ALL CONCRETE BELOW GRADE.
  5. INSTALL BASE 3'-0" ABOVE FINISH GRADE IN LOCATIONS WHERE POLES ARE IN PARKING LOT PAVEMENT.
  6. BID ALT. CONTRACTOR MAY SUBSTITUTE PRECAST CONCRETE LIGHT POLE BASE EQUAL TO ABOVE SPEC.

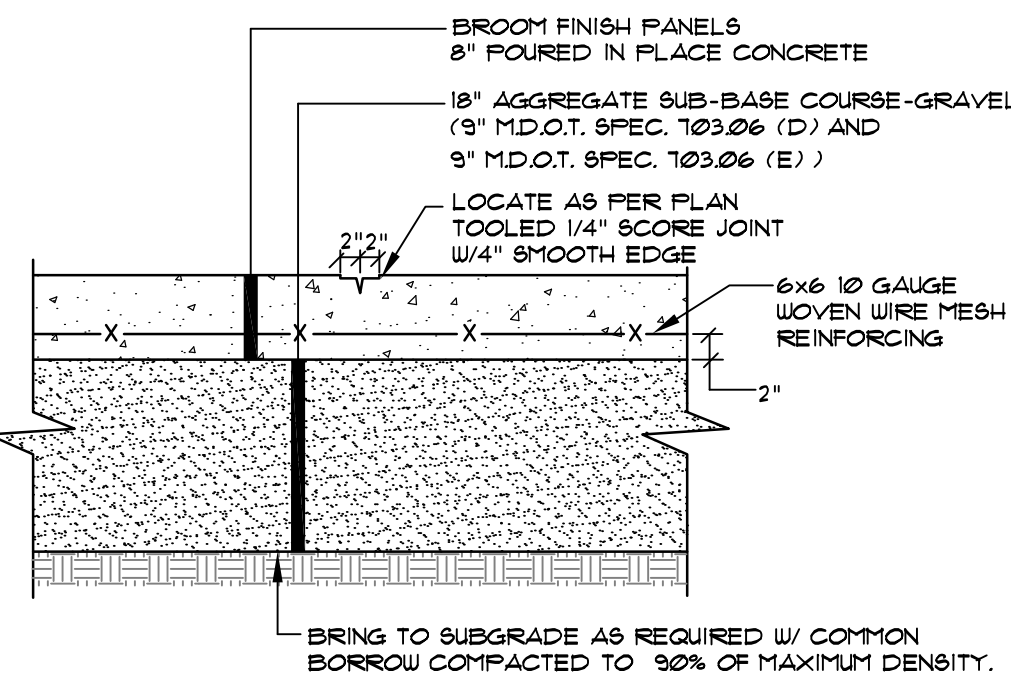


- NOTES:**
1. COMPACT GRAVEL SUB-BASE BASE COURSE TO 92% OF MAXIMUM DENSITY USING HEAVY ROLLER COMPACTION.
  2. CONTRACTOR SHALL SET GRADE STAKES MARKING SUBBASE AND FINISH GRADE ELEVATIONS FOR CONSTRUCTION REFERENCE.

**HEAVY DUTY CONCRETE PAVEMENT**  
NOT TO SCALE

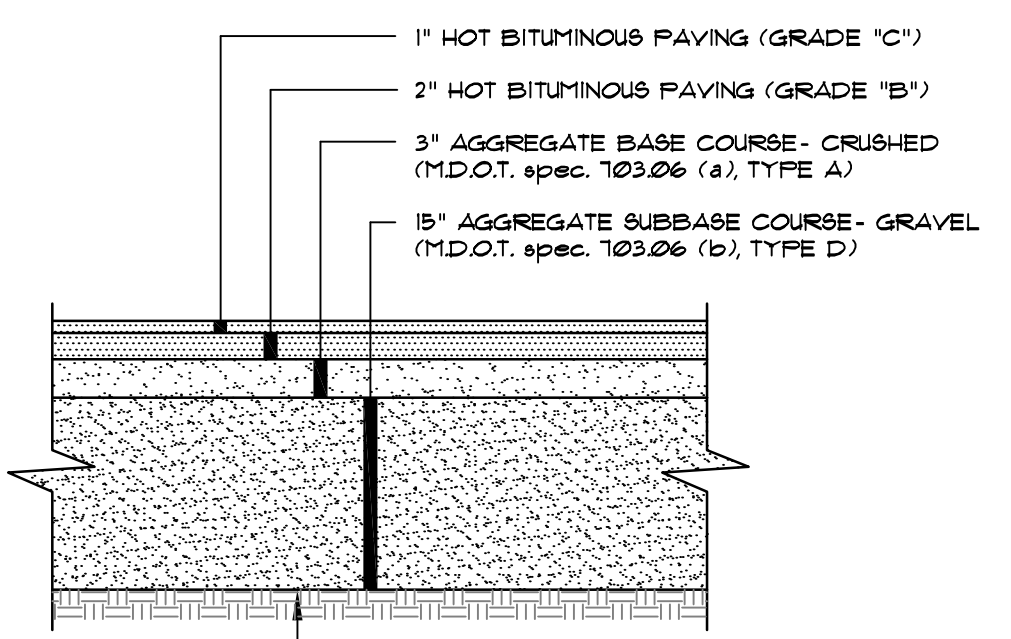


- NOTES:**
1. COMPACT GRAVEL SUBBASE, BASE COURSE TO 92% OF MAXIMUM DENSITY USING HEAVY ROLLER COMPACTION.
  2. CONTRACTOR SHALL SET GRADE STAKES MARKING SUBBASE AND FINISH GRADE ELEVATIONS FOR CONSTRUCTION REFERENCE.


**TYP. PAVED PARKING LOT SECTION**  
NOT TO SCALE

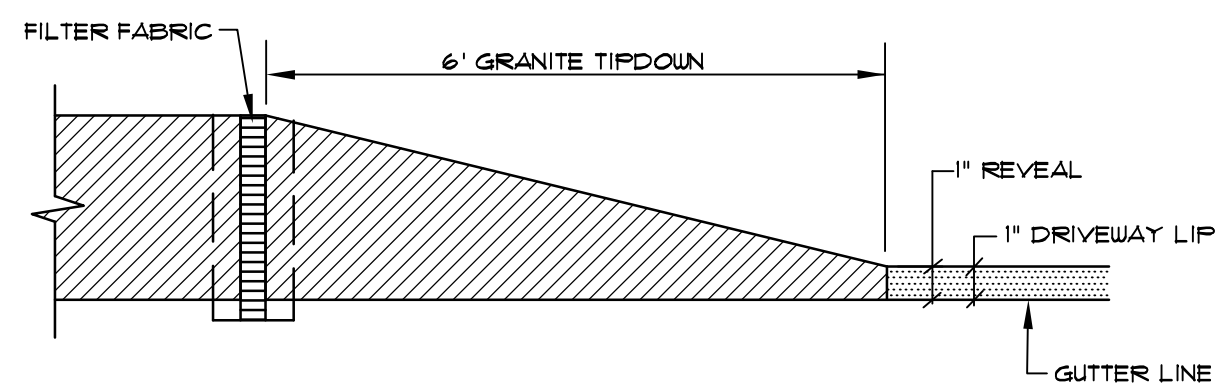


**TYPICAL TIPDOWN CURB INSTALLATION**  
NOT TO SCALE

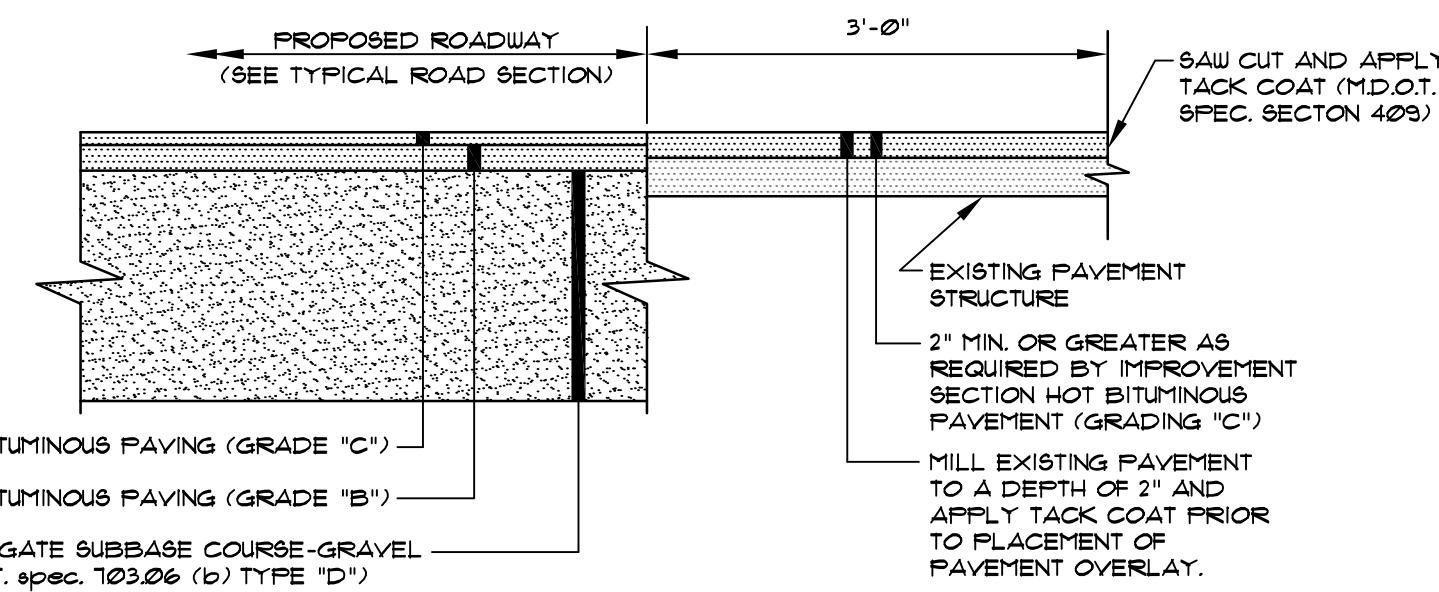


**TYPICAL PAVEMENT JOINT**  
NOT TO SCALE

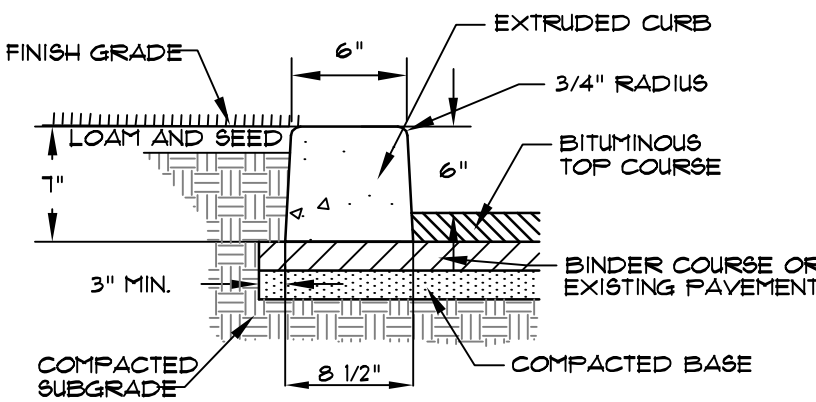


**SLIPFORM CONCRETE CURB**  
NOT TO SCALE

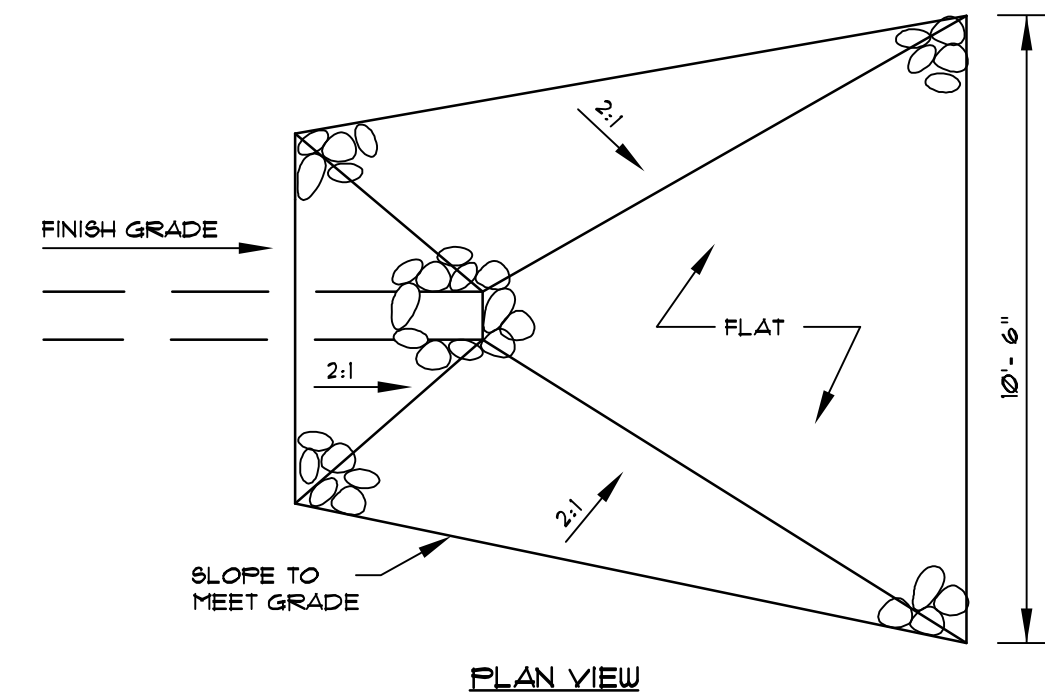


**RIPRAP APRON**  
NOT TO SCALE

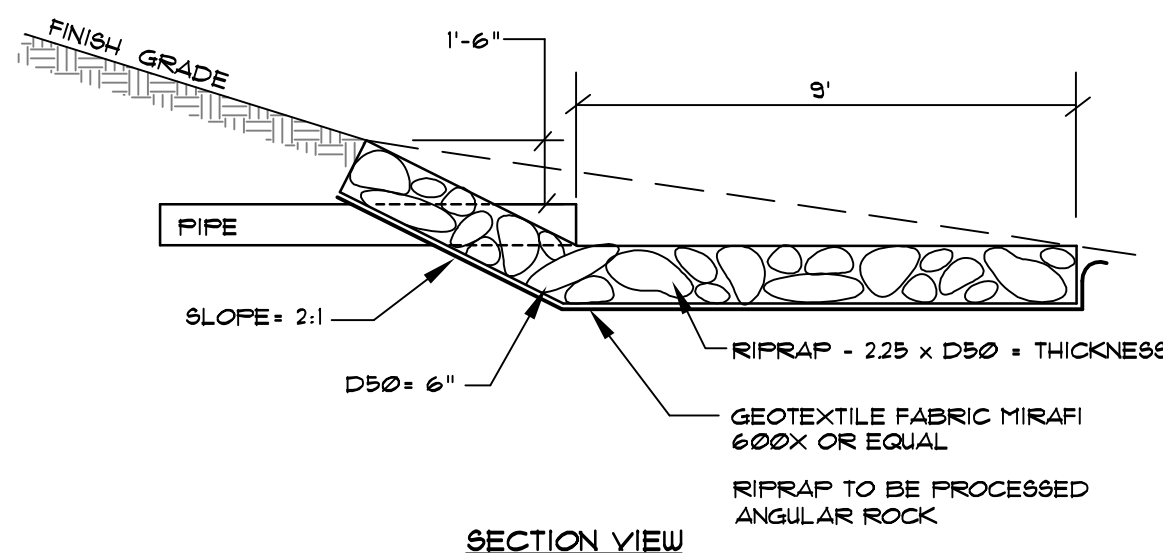

**METAL BOLLARD**  
NOT TO SCALE

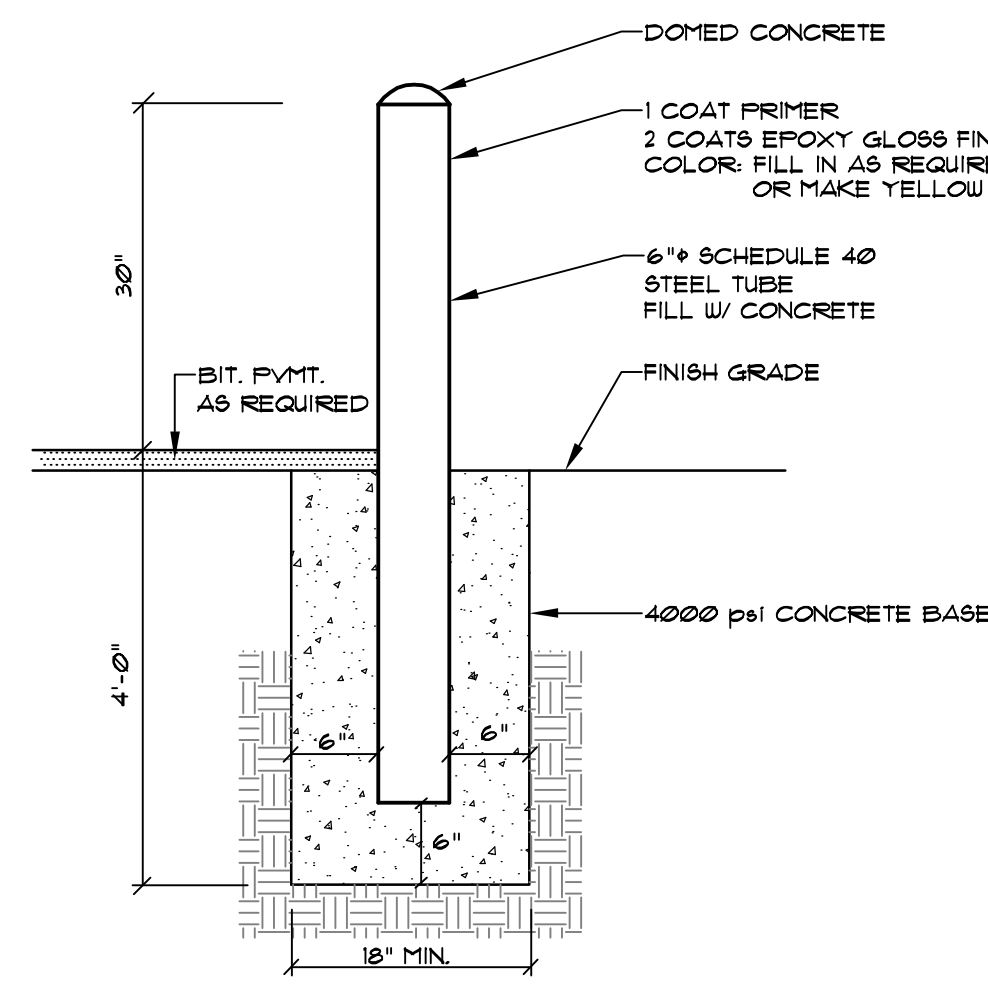


**BLOCK RETAINING WALL**  
NOT TO SCALE

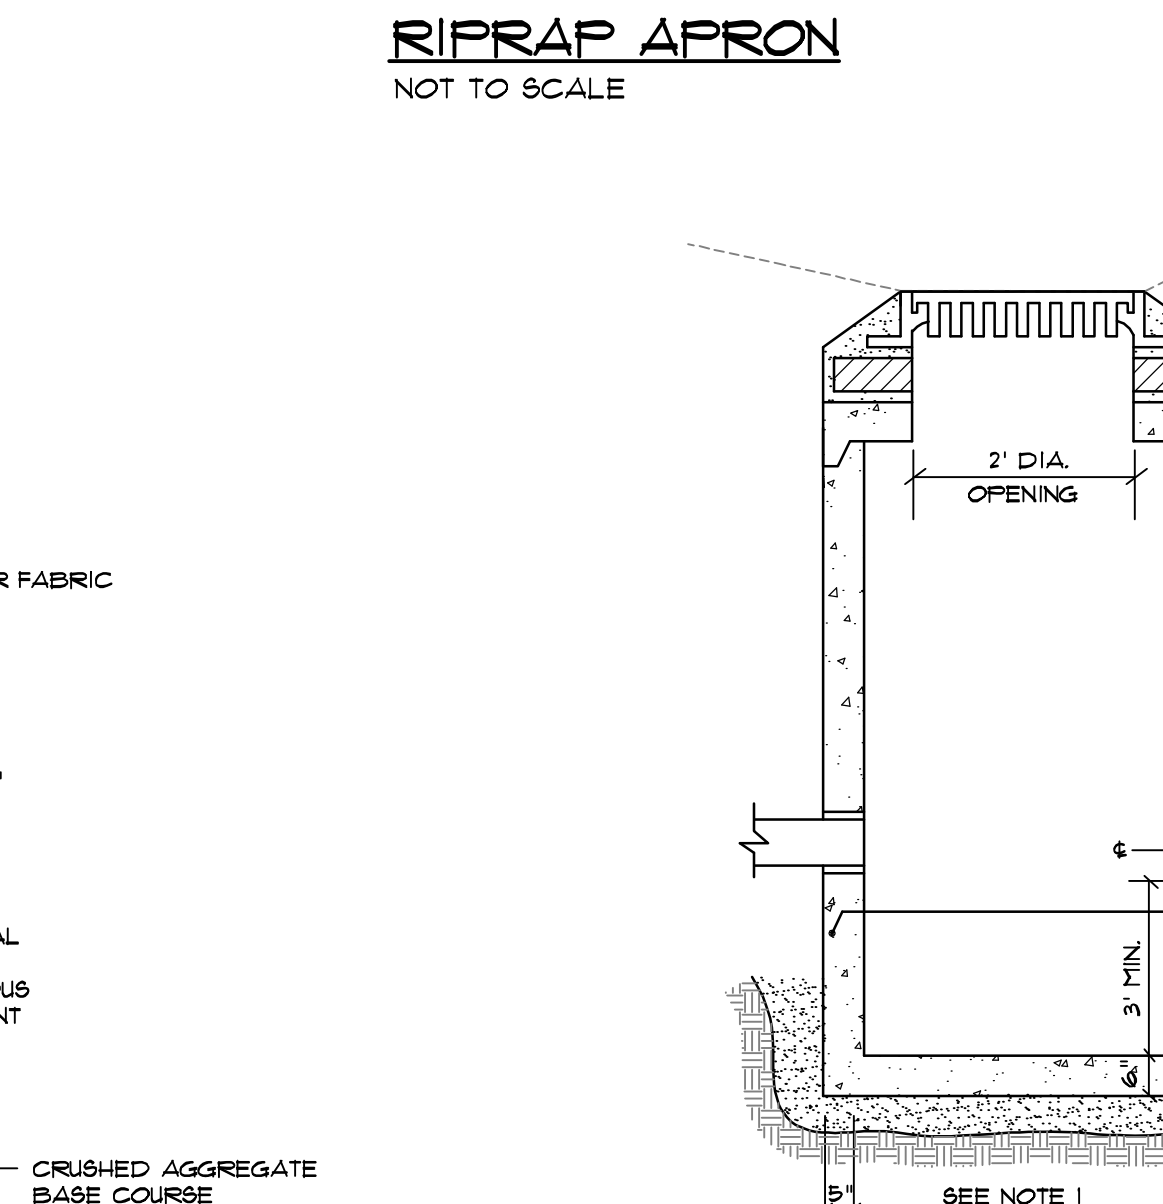


- NOTES:**
1. 4'-0" I.D. TYPICAL. SOME STRUCTURES MAY REQUIRE LARGER I.D. PROVIDE SHOP DRAWINGS.
  2. DRAINAGE STRUCTURES TO BE DESIGNED FOR H-20 LOADING.
  3. PIPE SIZES AND INVERTS AS NOTED ON PLANS.
  4. CATCH BASIN FRAME AND GRATE TO BE GENERAL FOUNDRY 12462 OR APPROVED EQUAL. LOW PROFILE FRAMES AND COVERS MAY BE USED AS A SUBSTITUTE.
  5. DRAINAGE MANHOLE FRAME AND COVER TO BE GENERAL FOUNDRY 12462 OR APPROVED EQUAL.

**TYP. DRAINAGE STRUCTURE & CATCH BASIN**  
NOT TO SCALE

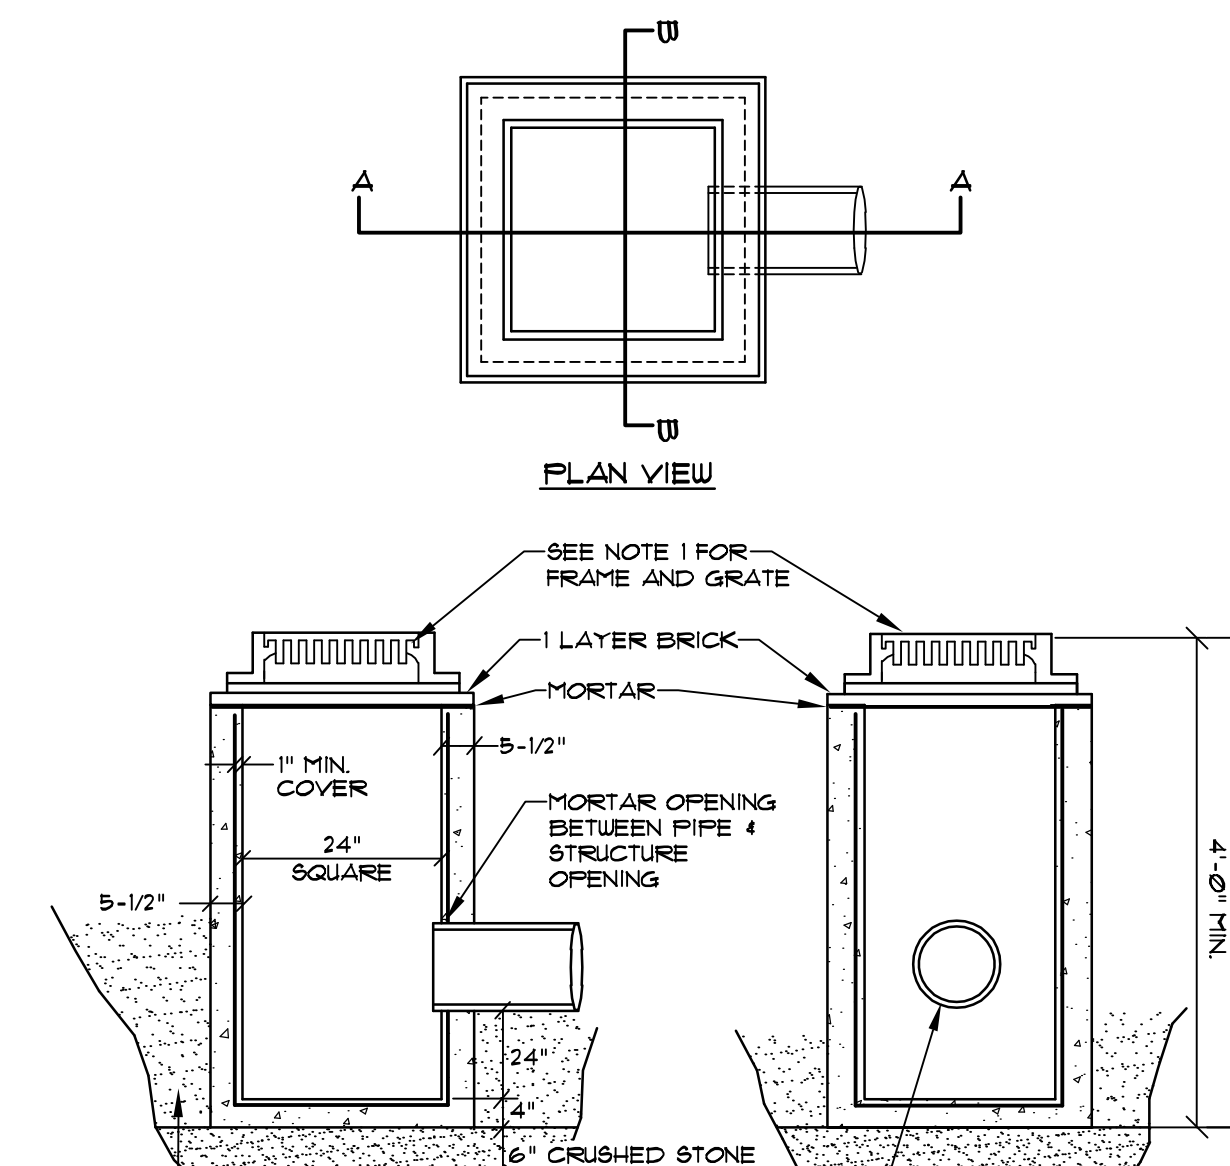

- NOTES:**
1. FRAME SHALL BE FOR 24" SQUARE GRATE - LEBARON TYPE "F" SQUARE FRAME (IF 24" 4" FLANGE OR ETHERIDGE SQUARE FRAME S24G, GRATE SHALL BE 24"x24" CAST IRON).
  2. ENTIRE CATCH BASIN WITH EXCEPTION OF LEVELING BRICK FRAME AND GRATE TO BE PRECAST AS SINGLE PORTLAND CEMENT CONCRETE UNIT.

**TYP. TYPE "F" CATCH BASIN**  
NOT TO SCALE

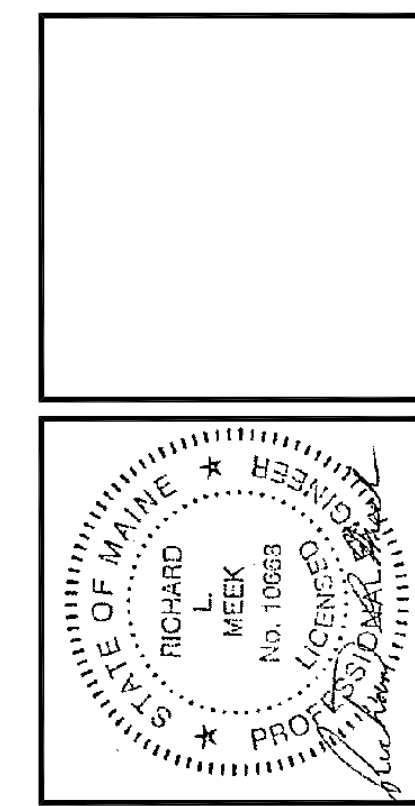

REVISED TO ADDRESS CONDITIONS OF APPROVAL	07-28-14	RLM
FINAL SITE PLAN SUBMISSION TO CITY	07-11-14	RLM
SITE PLAN SUBMISSION TO CITY	06-03-14	RLM
DATE:		BY:
		REV:

PROJECT NO.	FIELD BOOK	DESIGN	CHKD	DRAWN
02249	847	RLM	RLM	MAL

**SEBAGO TECHNICALS**  
WWW.SEBAGOTECHNICALS.COM  
75 John Roberts Rd. - Suite 1A  
South Portland, ME 04106  
Tel: 207-282-2100

**ALLAGASH BREWING COMPANY**  
INDUSTRIAL WAY  
PORTLAND, MAINE  
FOR:  
**50 INDUSTRIAL WAY**  
PORTLAND, MAINE 04103

DATE	SCALE
05-20-14	N.T.S.
SHEET	C9

02249D.dwg TAB-D2