

SPRINKLER PIPING KEYED NOTES:

- 1 RUN PIPING THROUGH PRE-CUT HOLES IN STRUCTURE. SEE STRUCTURAL DRAWINGS FOR LOCATIONS AND SIZES.

DOMESTIC PIPING GENERAL NOTES:

- 1. HOT WATER BRANCHES SHALL NOT EXCEED 12 FEET FROM MAIN WITHOUT A HOT WATER RETURN PIPING CONNECTION AND BALANCING VALVE.

DOMESTIC PIPING KEYED NOTES:

- 1 1 1/2" DCW UIW
- 2 1/2" DHW & DCW UIW
- 3 3/4" DHW & DCW UIW
- 4 1/2" DCW UIW
- 5 3/4" DCW UIW

MOUNT AT CHILD'S ADA HEIGHT, SEE MANUFACTURER'S INSTALLATION RECOMMENDATIONS


2" DCW, 1 1/2" HW AND 1/2" DHWR DIW FROM FLOOR BELOW

1/2" DCW & DHW UP FROM FLOOR BELOW


2" DCW, 1 1/2" DHW & 1/2" DHWR UIC FROM FLOOR BELOW

1/2" DHW & DCW DIW
1/2" DHW & DCW TO EACH P-4C

1/2" HW & CW DIW
1/2" HW & CW TO EACH P-3
1/2" CW TO HB-1

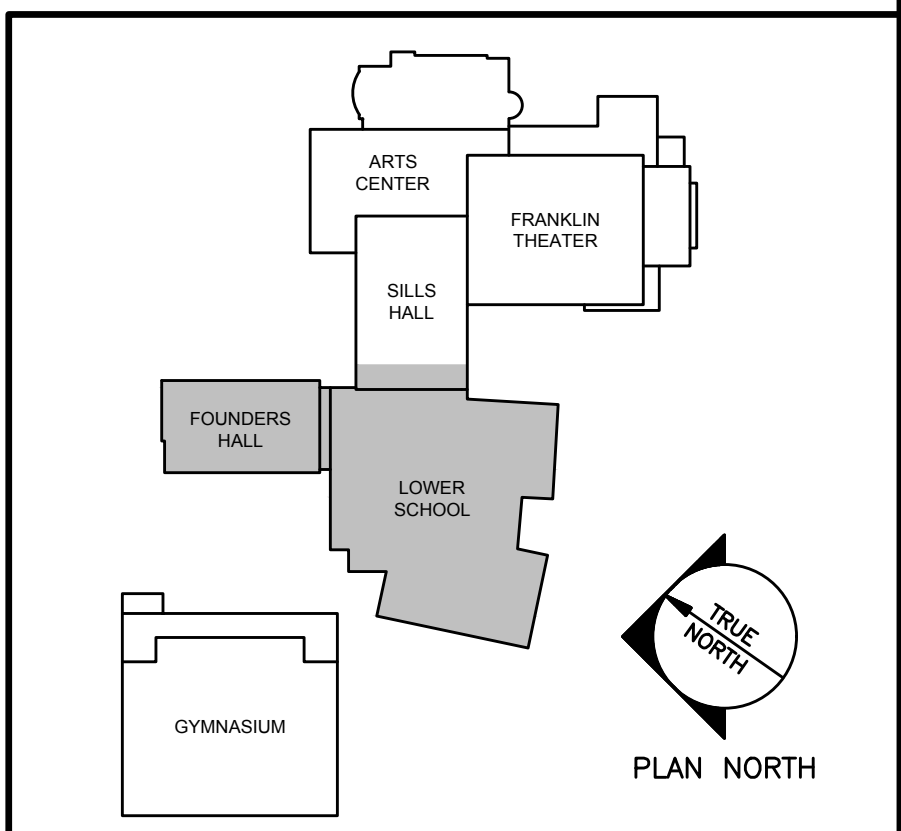

75 York Street,
Portland, Maine 04101
simonsarchitects.com
207.772.4656

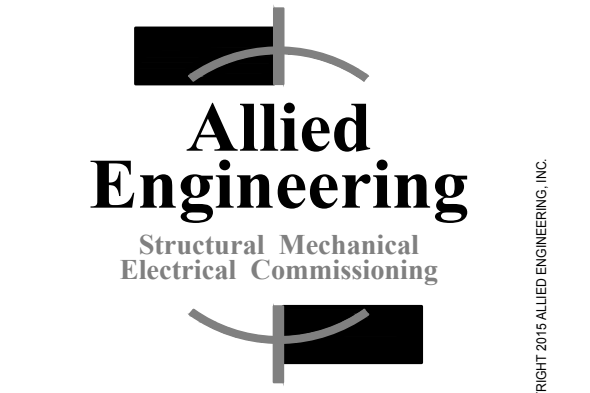

160 Veranda Street
Portland, Maine 04103
T: 207.221.2260
F: 207.221.2266
Web: www.allied-eng.com

Allied Project No: 15051
Cad File: 15051M.dwg

PROJECT NAME:
**WAYNFLETE
LOWER SCHOOL**
ADDITION & RENOVATIONS

WAYNFLETE SCHOOL
360 SPRING STREET
PORTLAND, MAINE 04102



THIS DRAWING IS THE PROPERTY OF SCOTT SIMONS ARCHITECTS (SSA) AND IS NOT TO BE COPIED OR REPRODUCED IN PART OR WHOLE. © 2015 SCOTT SIMONS ARCHITECTS, LLC.

REVISION:

| NO. | DATE |
|-----|------|
| 1 | DATE |
| 2 | DATE |
| 3 | DATE |
| 4 | DATE |
| 5 | DATE |
| 6 | DATE |

DATE OF ISSUE: 12 JANUARY 2017
PROJECT NUMBER: 2013-0050
STATUS: ISSUED FOR BID

**DOMESTIC
PIPING PLAN ~
MAIN LEVEL**

PP102

N:\Projects\2015\15051 - Wayneflete School\00 Drawing Files\15051P.dwg Jan 11, 2017 - 10:25am

| | | | |
|--------------|-----------------------------------|--------------|------------|
| A1 | DOMESTIC PIPING PLAN ~ MAIN LEVEL | A9 | KEYED PLAN |
| 1/8" = 1'-0" | | NOT TO SCALE | |