

WINDOW SCHEDULE


MARK	MANF.	MODEL	TYPE	SIZE		HEAD	JAMB	SILL	REMARKS	
				FRAME	R.O.					
A	CUSTOM		PICTURE	6'-9" X 8'-9"	6'-9" X 8'-9 1/2"				1" INSULATED GLASS, TEMPERED, IN HARDWOOD FRAME WITH CLEAR FINISH	
B	CUSTOM		PICTURE	6'-9" X 3'-9 1/2"	6'-9" X 3'-10"				1" INSULATED GLASS, TEMPERED, IN HARDWOOD FRAME WITH CLEAR FINISH	
C	MARVIN	CAWN3656	AWNING	3'-0" X 4'-7 1/8"	3'-1" X 4'-7 5/8"				1 1/8" SDL WITH SPACER BAR	
C1	MARVIN	CAWN3656	AWNING	3'-0" X 4'-7 1/8"	3'-1" X 4'-7 5/8"				1 1/8" SDL LAMINATED GLAZING	
D	MARVIN	CCM2440 (4)	MULLED	4'-0 3/8" X 6'-6 5/8"	4'-1 3/8" X 6'-7 1/8"				4 MULLED UNITS	
D1	MARVIN	CAWN2440 (2), CCM2440 (2)	MULLED	4'-0 3/8" X 6'-6 5/8"	4'-1 3/8" X 6'-7 1/8"				4 MULLED UNITS, 2 OPERABLE	
D2	MARVIN	CAWN2440 (4), CCM2440 (4)	MULLED	8'-1 1/8" X 6'-6 5/8"	8'-2 1/8" X 6'-7 1/8"				8 MULLED UNITS, 4 OPERABLE	
E	MARVIN	WAWN4064 (2)	MULLED	6'-8" X 5'-4 1/16"	6'-9" X 5'-4 9/16"				2 MULLED UNITS	
F	MARVIN	WAWN4036 (2)	MULLED	6'-8" X 3'-0 1/16"	6'-9" X 3'-0 9/16"				2 MULLED UNITS	
G	MARVIN	WAWN4064 & CUSTOM PICTURE (5'-4 1/8" X 4'-5'-8" VIF)	MULLED	+/- 9'-0" X 5'-4 1/16" VIF (WIDTH)	+/- 9'-1" X 5'-4 9/16" VIF (WIDTH)				2 MULLED UNITS, 1 OPERABLE	
H	MARVIN	WAWN4036 & CUSTOM	MULLED	+/- 9'-0" X 3'-0 1/16"	+/- 9'-1" X 3'-0 9/16"				2 MULLED UNITS	
I1	MARVIN	WCMP6464, WAWN6436	MULLED	5'-4" X 8'-3 9/16"	5'-5" X 8'-4 1/16"				2 MULLED UNITS, 1 OPERABLE	
I2	MARVIN	WCMP6464 (2), WAWN6436 (2)	MULLED	10'-8 3/8" X 8'-3 9/16"	10'-9 3/8" X 8'-4 1/16"				4 MULLED UNITS, 2 OPERABLE	
J1	MARVIN	WAWN6436	AWNING	5'-4" X 3'-0 1/16"	5'-5" X 3'-0 9/16"				3/A-8.2	
J2	MARVIN	WAWN6436 (2)	MULLED	10'-8 3/8" X 3'-0 1/16"	10'-9 3/8" X 3'-0 9/16"				3/A-8.2	
K	MARVIN	CCM3660 (4)	MULLED	6'-0 3/8" X 9'-10 5/8"	6'-1 3/8" X 9'-11 1/8"				4 MULLED UNITS	
L	MARVIN	CCM3660 (2), CAWN3660 (2)	MULLED	6'-0 3/8" X 9'-10 5/8"	6'-1 3/8" X 9'-11 1/8"				4 MULLED UNITS, 2 OPERABLE	
M				REPLACE EXISTING GLAZING WITH CLEAR INSULATED POLYCARBONATE PANELS, TYPICAL AT ALL EXISTING GYM WINDOWS						
AA	CUSTOM		PICTURE	5'-2" X 12'-8"	5'-3" X 12'-9"				1/4" TEMPERED GLASS, 3 EQUAL PANES, IN ALUMINUM TRACK WITH HW FRAME	
BB	CUSTOM		PICTURE	5'-5 1/2" X 9'-0"					1/4" TEMPERED GLASS IN HARDWOOD FRAME WITH CLEAR FINISH	

NOTES:

- ALL OPERABLE WINDOWS SHALL BE INSTALLED WITH SCREENS.
- ALL WINDOWS WITH WOOD EXTERIORS SHALL BE MAHOAGANY, FINISHED IN FIELD BY G.C.
- WINDOWS TYPE C, C1, D1 AND D2 SHALL HAVE PRE-PRIMED WHITE WOOD INTERIORS.
- WINDOWS TYPE K AND L SHALL HAVE MAHOAGANY WOOD INTERIORS WITH CLEAR FINISH (FINISHED IN FIELD BY G.C.).
- ALL POLYCARBONATE GLAZING SHALL BE CLEAR INSULATED.
- ALL SIMULATED DIVIDED LIGHTS (SDL'S) SHALL MATCH EXISTING ADJACENT WINDOWS (REPLACED DURING FIRST PHASE OF CONSTRUCTION WORK).
- ALL LAMINATED GLASS SHALL FACE INTERIOR, TEMPERED GLASS SIDE SHALL FACE EXTERIOR.


1 WINDOW SCHEDULE

SCALE: NTS

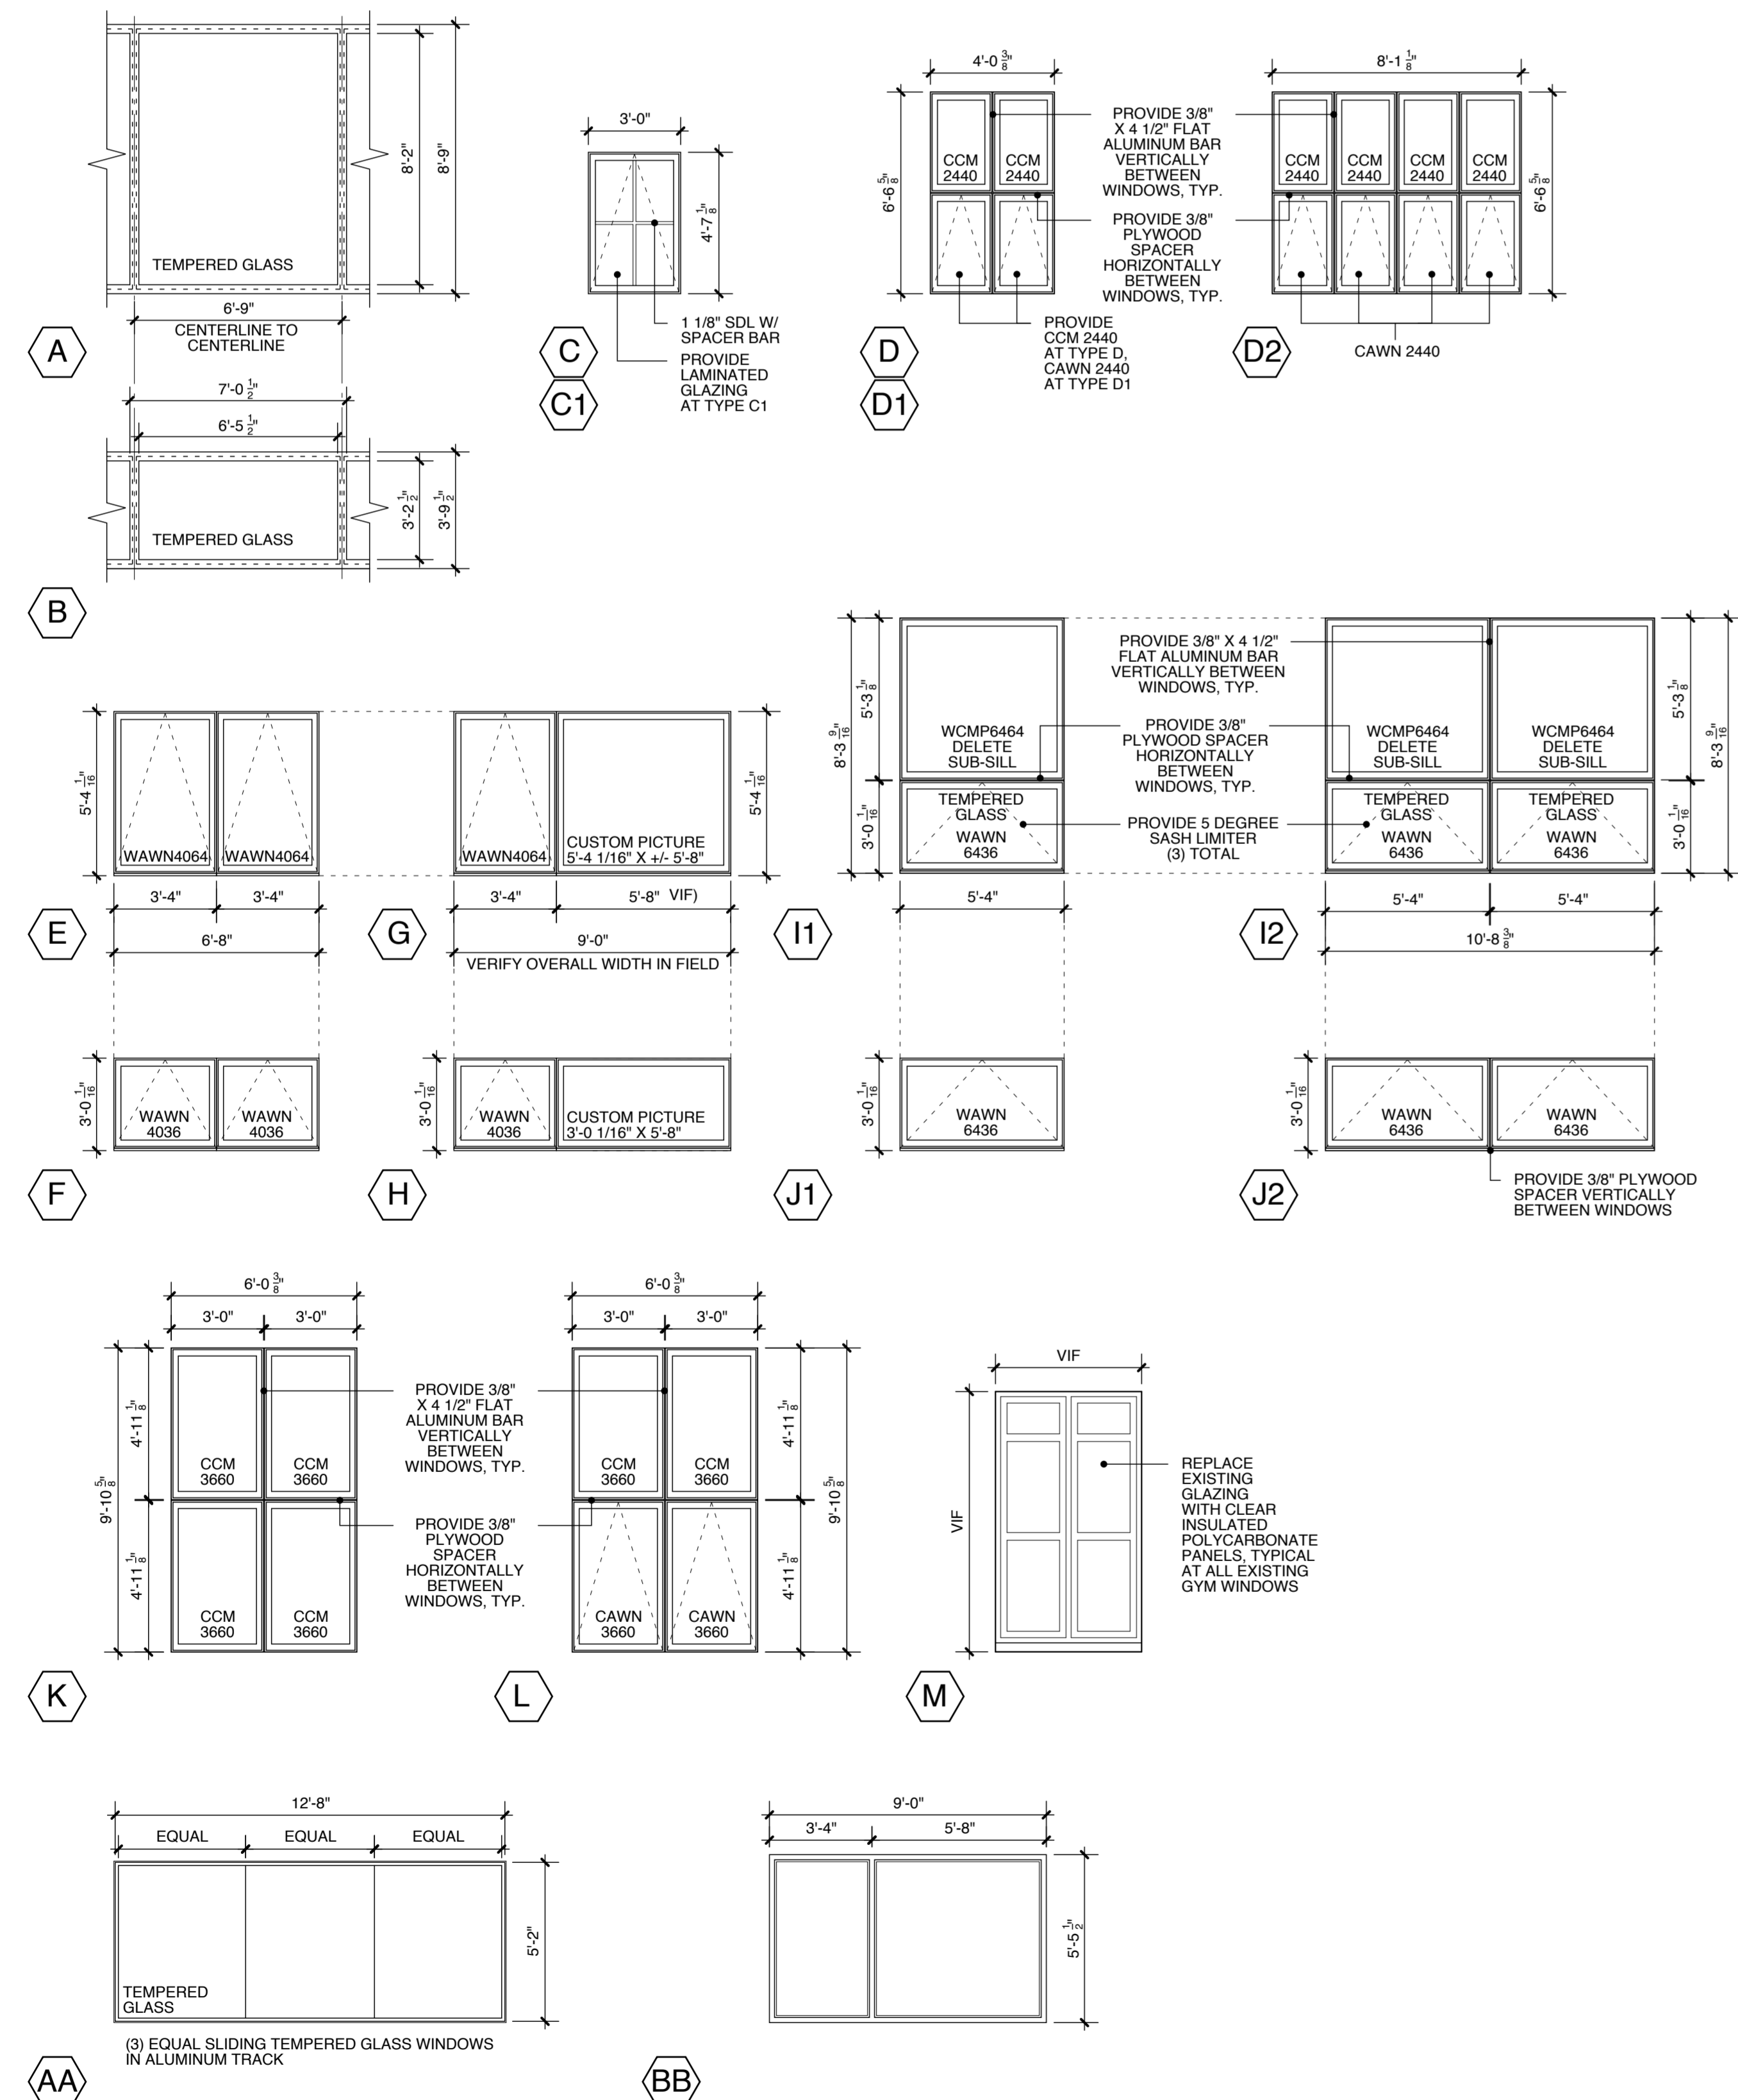


4 WINDOW ELEVATIONS

SCALE: 1/4" = 1'-0"

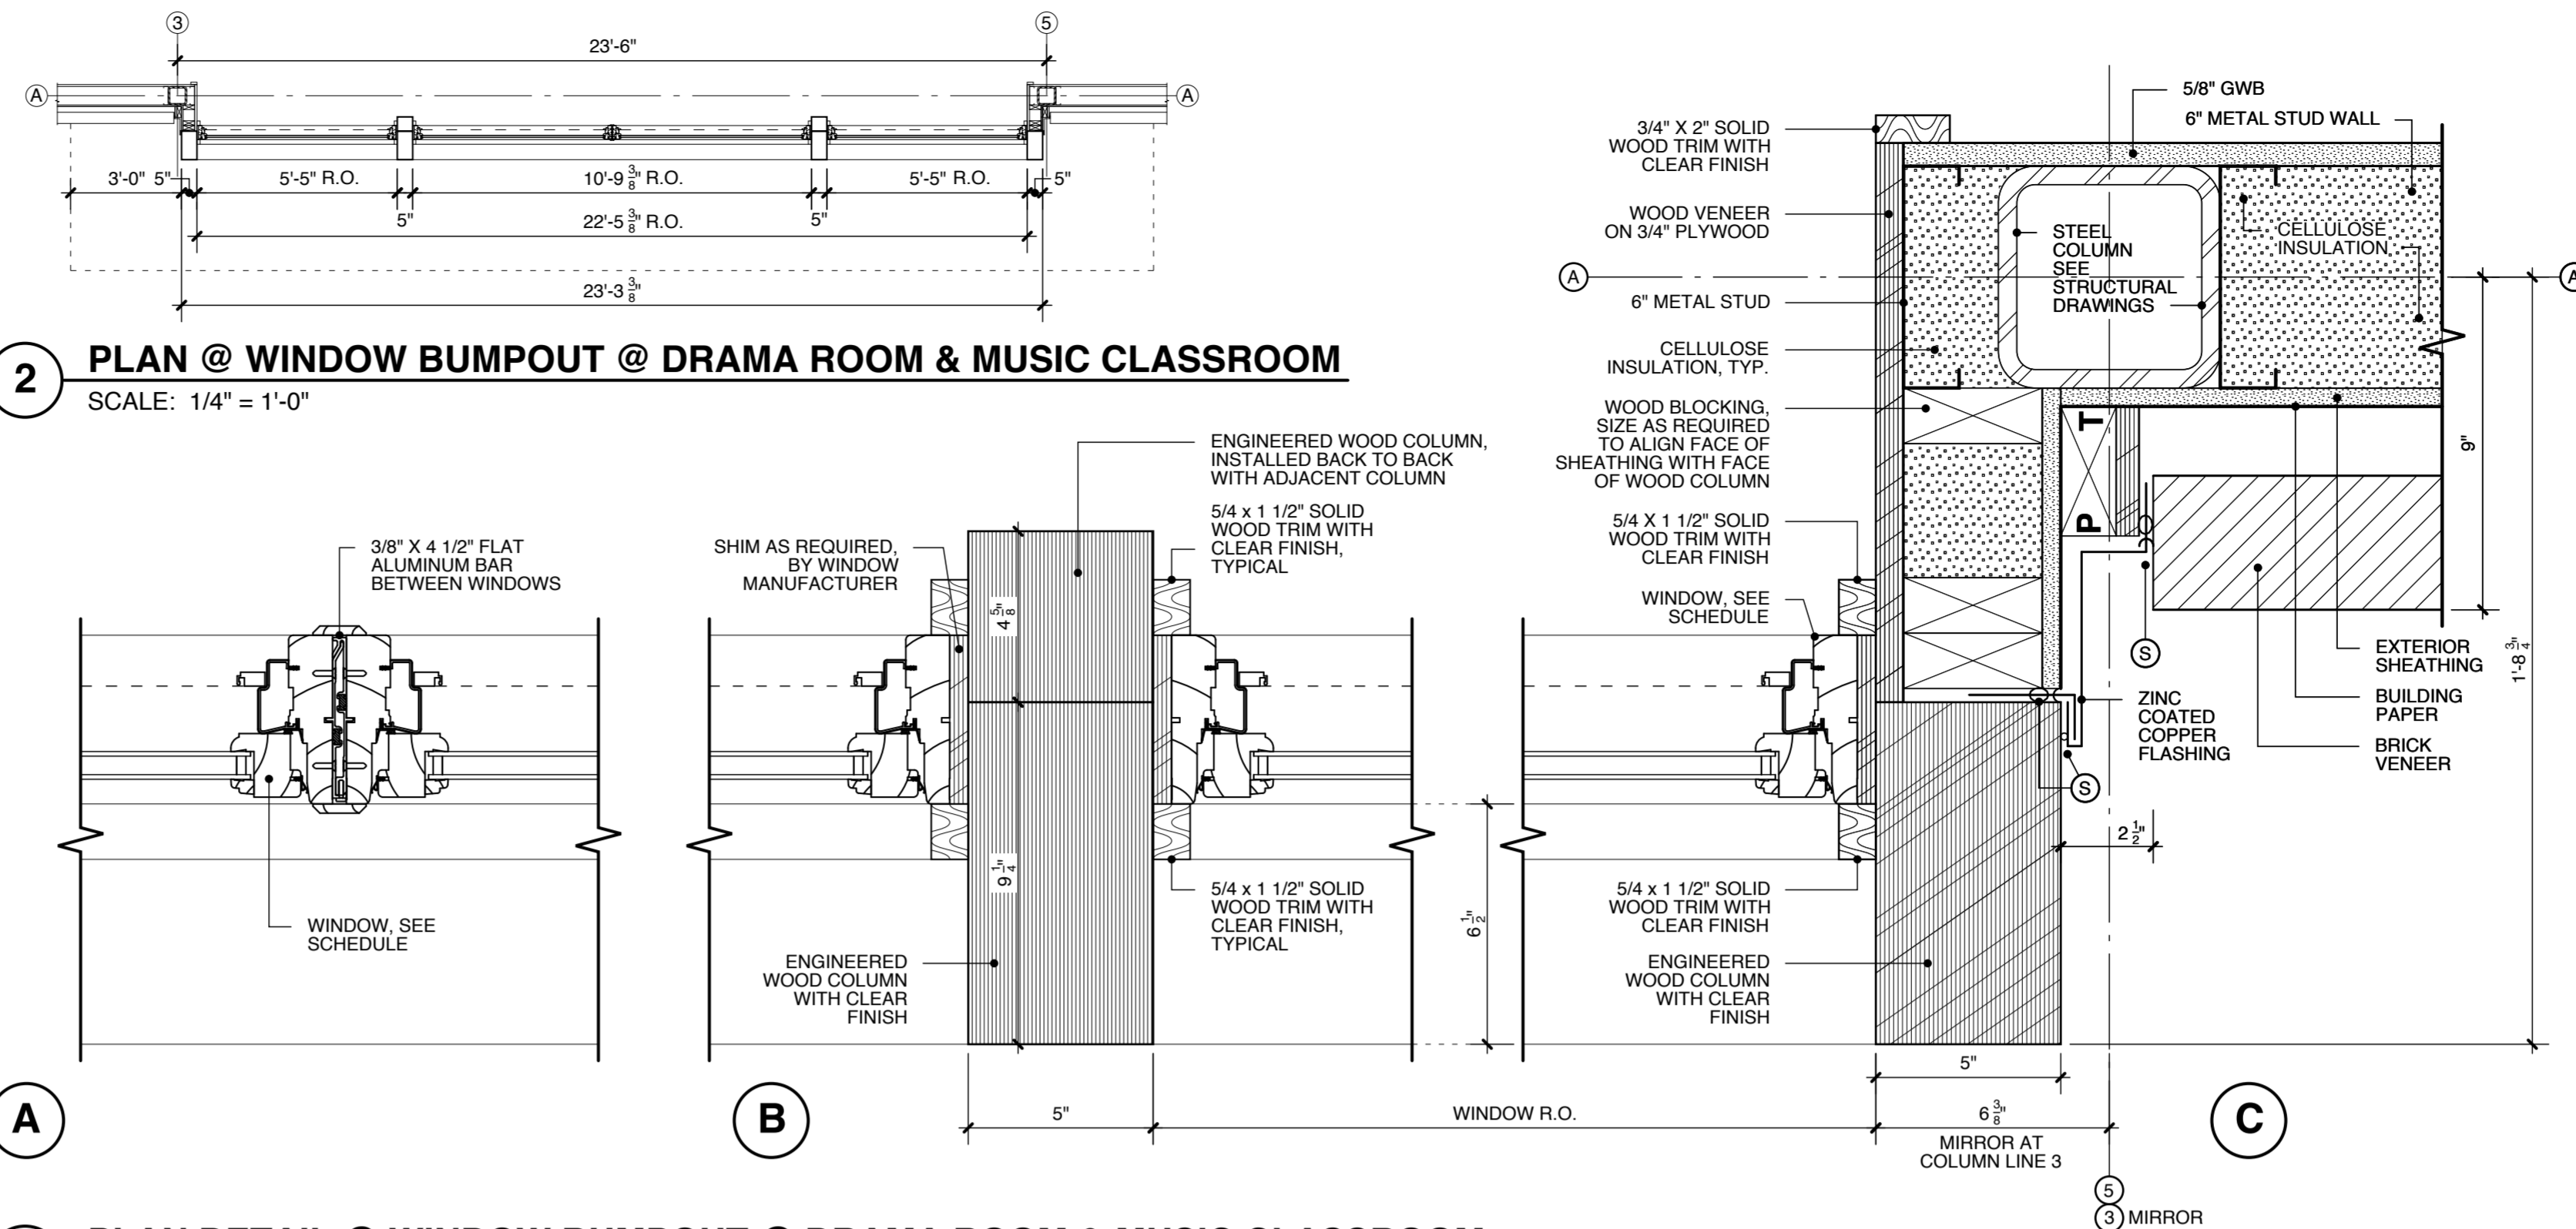


3 PLAN DETAIL @ WINDOW BUMPOUT @ DRAMA ROOM & MUSIC CLASSROOM

SCALE: 3\"/>

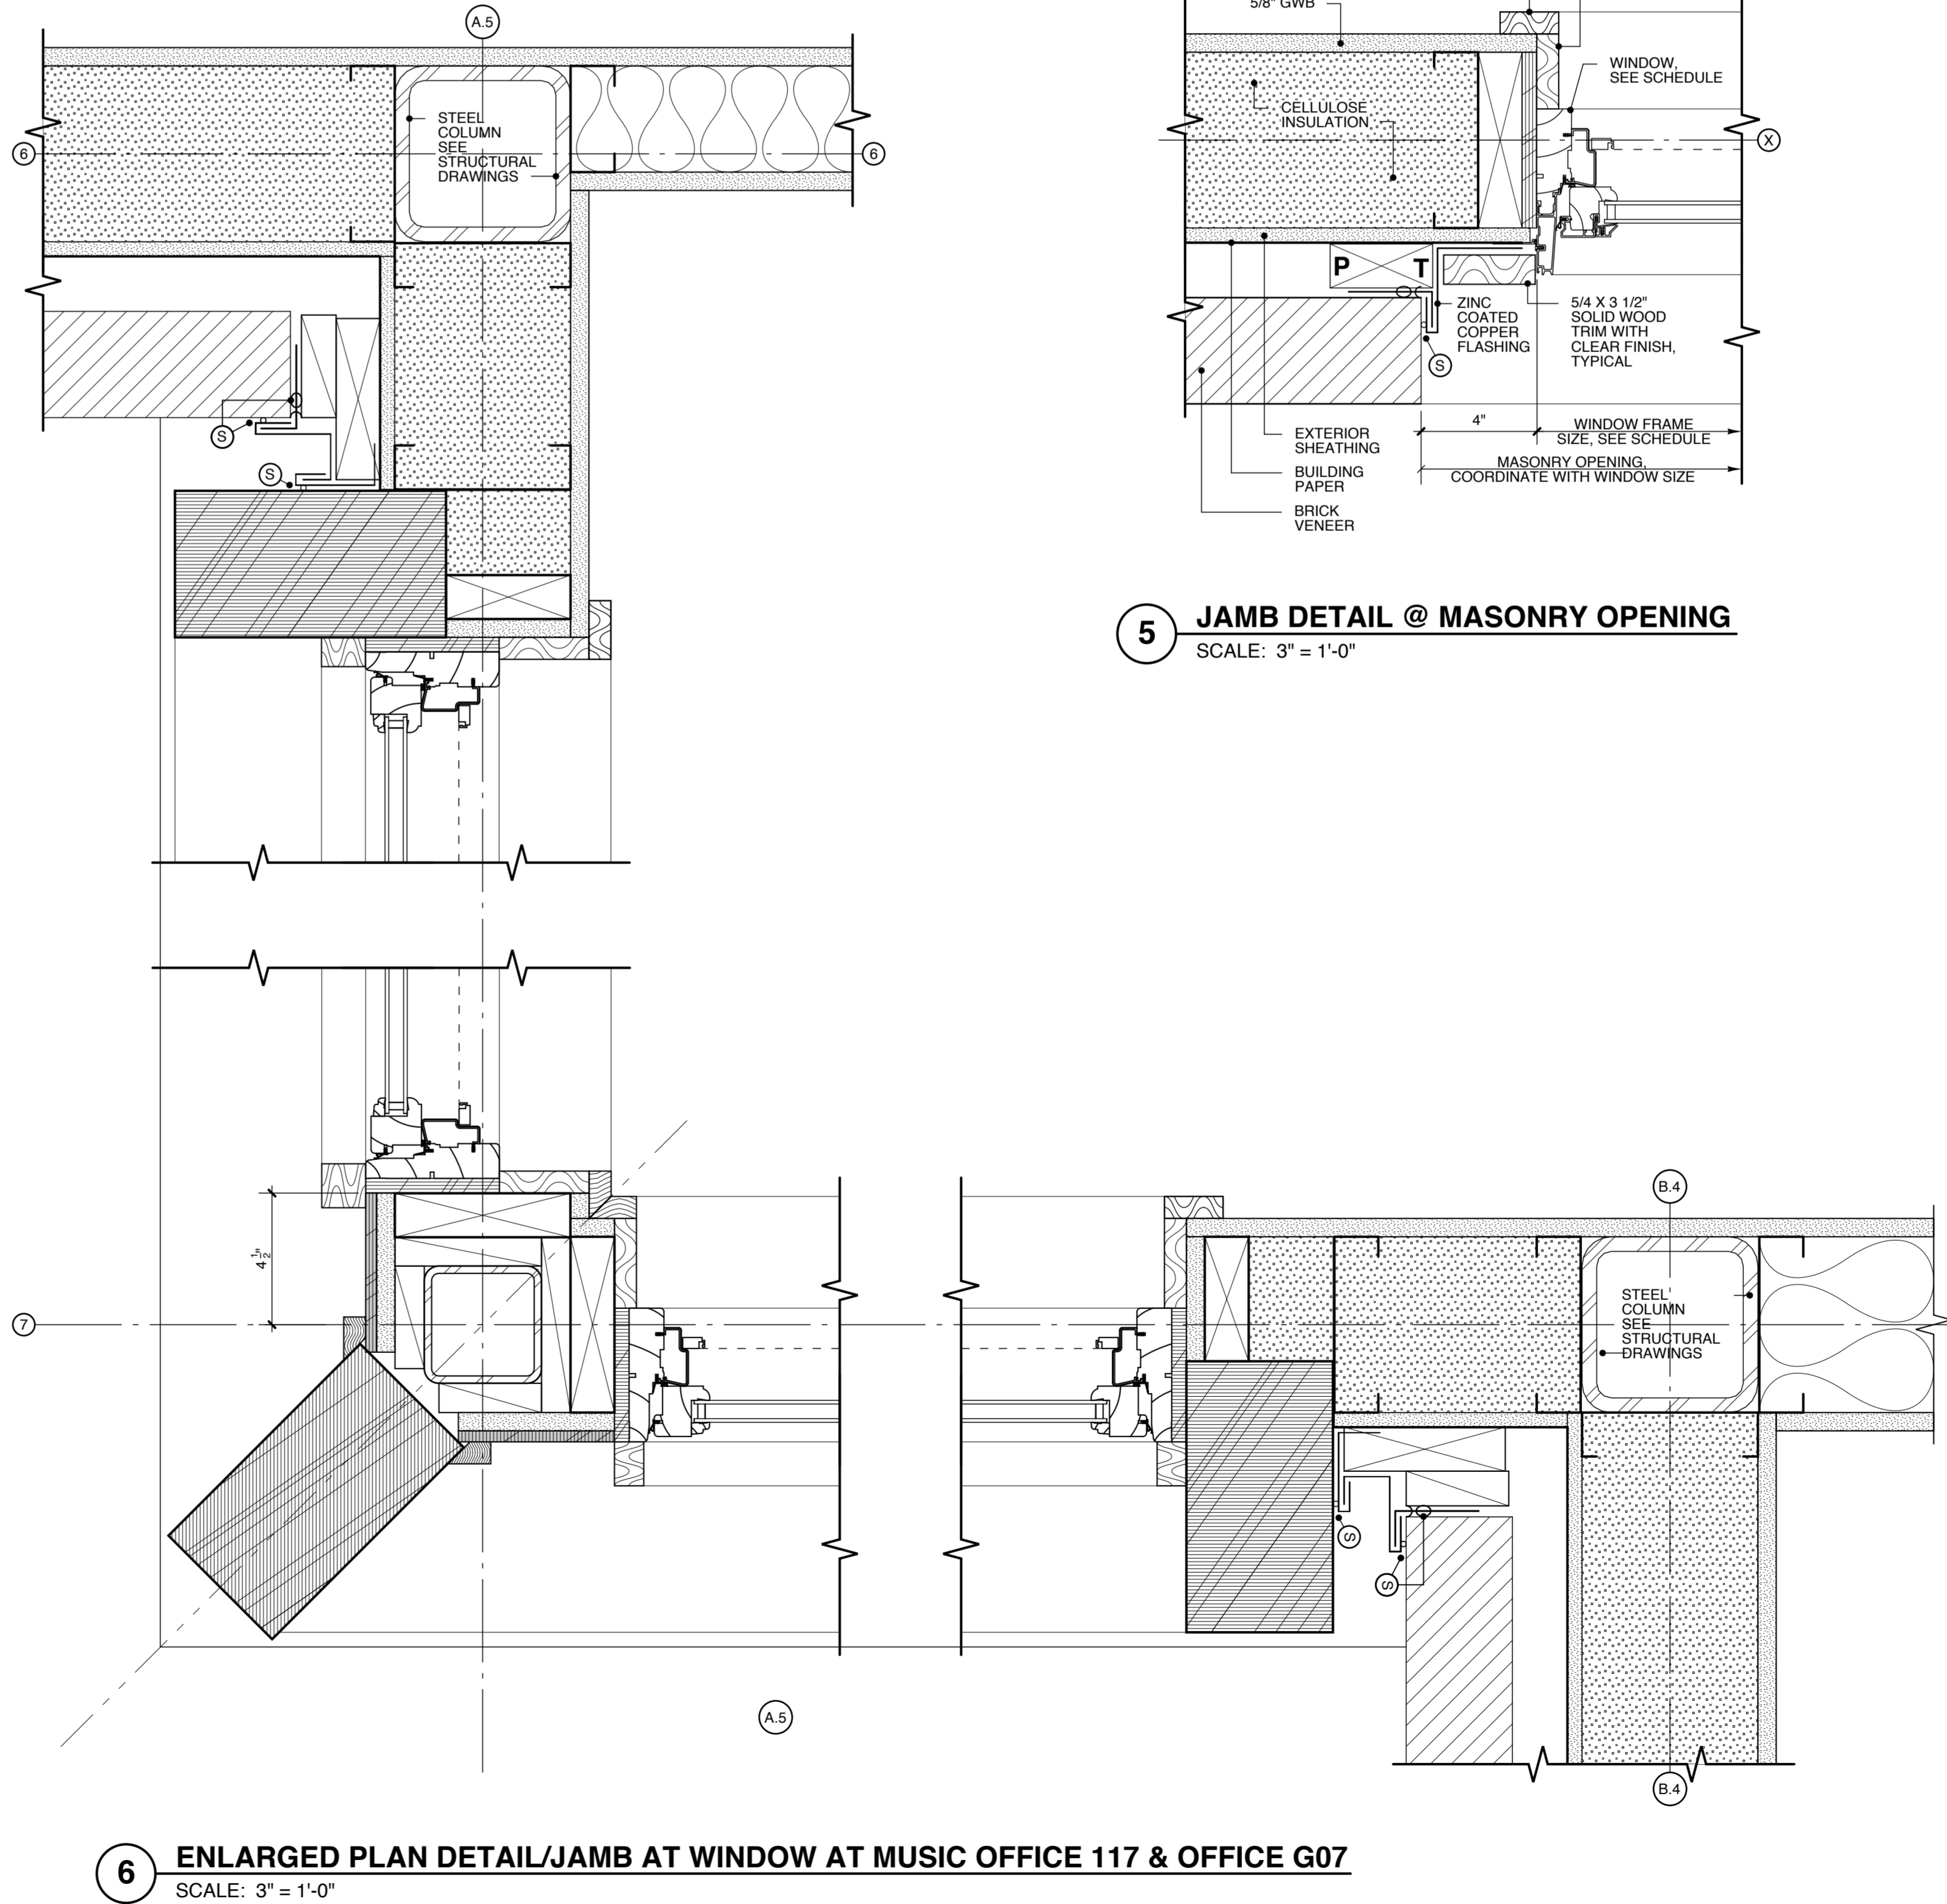

6 ENLARGED PLAN DETAIL/JAMB AT WINDOW AT MUSIC OFFICE 117 & OFFICE G07

SCALE: 3\"/>

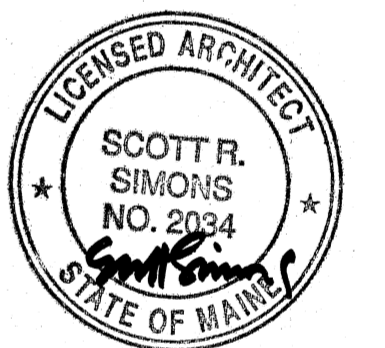

SSA
Scott Simons Architects

75 York Street
Portland, Maine 04101
phone 207 772 4656
fax 207 828 4656

THIS DRAWING IS THE PROPERTY OF SCOTT SIMONS ARCHITECTS AND IS NOT TO BE COPIED OR REPRODUCED IN PART OR WHOLE.

PROJECT

**WAYNFLETE ARTS CENTER
PHASE TWO**

ADDITION/ RENOVATION
360 SPRING STREET
PORTLAND, ME

TITLE

**WINDOW
SCHEDULE
& DETAILS**

STATUS: **ISSUED FOR BIDDING**
CONSTRUCTION DOCUMENTS

DATE: 09.07.2007 REVISION / DATE:

PROJECT NO: 2003-0040.00

DRAWN BY: 2007 © Scott Simons Architects

DWG NO. **A-8.2**