GENERAL NOTES

1. THE FOLLOWING NOTES ARE INTENDED TO BE USED AS OUTLINED SPECIFICATIONS FOR THIS PROJECT. THE REFERENCED STANDARDS ARE CONSIDERED TO BE PART OF THE WORK.
2. STRUCTURAL DRAWINGS SHALL BE USED IN CONJUNCTION WITH ARCHITECTURAL DRAWINGS. CONSULT THIS DRAWING FOR LOCATIONS AND DIMENSIONS OF OPENINGS, CHASES, INSERTS, REGLETS, SLEEVES, DEPRESSIONS, AND OTHER DETAILS NOT SHOWN ON STRUCTURAL DRAWINGS.
3. ALL DIMENSIONS AND CONDITIONS MUST BE VERIFIED IN THE FIELD. ANY DISCREPANCIES SHALL BE BROUGHT TO THE ATTENTION OF THE ARCHITECT BEFORE PROCEEDING WITH THE AFFECTED PART OF THE WORK.
4. THE STRUCTURE IS DESIGNED TO BE SELF SUPPORTING AND STABLE ONLY AFTER THE STRUCTURAL WORK CONTAINED IN THE STRUCTURAL DRAWINGS IS COMPLETED. IT IS THE CONTRACTOR'S SOLE RESPONSIBILITY TO DETERMINE ERECTION PROCEDURES AND SEQUENCE TO ENSURE THE SAFETY OF THE BUILDING AND ITS COMPONENTS DURING ERECTION. THIS INCLUDES THE ADDITION OF NECESSARY SHORING, SHEETING, TEMPORARY BRACING, GUYS OR TIEDOWNS. SUCH MATERIAL SHALL REMAIN THE PROPERTY OF THE CONTRACTOR AFTER COMPLETION OF THE PROJECT.
5. SECTIONS AND DETAILS SHOWN ON ANY STRUCTURAL DRAWINGS SHALL BE CONSIDERED TYPICAL FOR SIMILAR CONDITIONS AS DETERMINED BY THE ENGINEER.
6. ALL APPLICABLE FEDERAL, STATE, AND MUNICIPAL REGULATIONS SHALL BE FOLLOWED, INCLUDING THE FEDERAL DEPARTMENT OF LABOR OCCUPATIONAL SAFETY AND HEALTH ACT (OSHA).

DESIGN LOADS

1. BUILDING CODE: MAINE UNIFORM BUILDING AND ENERGY CODE, INTERNATIONAL RESIDENTIAL CODE, 2009 EDITION ASCE 7-05 MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES.
2. DESIGN FLOOR LIVE LOADS:

UNINHABITABLE ATTICS W/ LIGHT STORAGE	20 PSF
SLEEPING ROOMS	30 PSF
ALL OTHER AREAS	40 PSF

3. DESIGN ROOF SNOW LOAD:

GROUND SNOW LOAD (Pg):	60 PSF
SNOW EXPOSURE FACTOR (Ce):	1.0
SNOW LOAD IMPORTANCE FACTOR (Is):	1.0
SNOW LOAD THERMAL FACTOR (Ct):	1.1
FLAT ROOF SNOW LOAD (Pf):	46 PSF + DRIFT

4. DESIGN WIND LOAD:

BASIC WIND SPEED:	100 MPH
WIND LOAD IMPORTANCE FACTOR (Iw):	1.0
WIND EXPOSURE:	B
INTERNAL PRESSURE COEFFICIENT:	±0.18
COMPONENTS & CLADDING LOADS PER ASCE 7-05	

FOUNDATION NOTES (SOIL SUPPORTED)

1. FOUNDATION DESIGN IS BASED ON SHALLOW SPREAD FOOTINGS BEARING ON SUITABLE UNDISTURBED NATIVE SOILS AND/OR NEW COMPACTED STRUCTURAL FILL EXTENDING TO UNDISTURBED NATIVE SOIL.
2. IT IS THE CONTACTOR'S SOLE RESPONSIBILITY TO VERIFY EXISTING SOIL CONDITIONS AND TO BRING ANY DISCREPANCIES TO THE ATTENTION OF THE ARCHITECT PRIOR TO COMMENCING PLACEMENT OF FOUNDATIONS.
3. PRESUMPTIVE BEARING CAPACITY OF 3000 PSF.
4. EXTEND BOTTOM OF EXTERIOR FOOTINGS AT LEAST 4.5 FEET BELOW THE FINAL EXTERIOR GRADE FOR PROTECTION AGAINST FROST.
5. ALL PAVEMENT, EXISTING FOUNDATIONS AND UNCONTROLLED GRANULAR FILL SHALL BE REMOVED FROM THE AREA OF THE PLANNED FOUNDATION TO AT LEAST 4 FEET BEYOND THE FOOTING LIMIT.
6. COMPACTED STRUCTURAL FILL SHALL BE USED TO BACKFILL TO THE DESIGN FOOTING SUBGRADE AND BENEATH ALL SLABS ON GRADE. STRUCTURAL FILL SHALL BE A CLEAN SAND-GRAVEL MIXTURE MEETING THE FOLLOWING GRADATION:

SCREEN OR SIEVE SIZE	PERCENT PASSING
6 INCH	100
3 INCH	90-100
1/4 INCH	25-90
NO. 40	0-30
NO. 200	0-5

7. STRUCTURAL FILL SHALL BE PLACED IN UNIFORM LIFTS NOT EXCEEDING 8 INCHES IN LOOSE THICKNESS AND SHALL BE COMPACTED TO 95 PERCENT OF MAXIMUM DRY DENSITY PER ASTM D1557, MODIFIED PROCTOR TEST. COMPACT ADJACENT TO FOUNDATION WALLS SUPPORTING UNBALANCED FILL (RETAINING WALLS) TO 94 TO 96 PERCENT OF MAXIMUM DRY DENSITY PER ASTM D1557. HAND OPERATED EQUIPMENT SHALL BE USED FOR COMPACTION WITHIN 8 FEET OF NEW FOUNDATION WALL.
8. NO BACKFILL SHALL BE PLACED AGAINST FOUNDATION WALLS RETAINING EARTH, UNLESS WALLS ARE ADEQUATELY BRACED TO PREVENT MOVEMENT OR STRUCTURAL DAMAGE.
9. PROVIDE PVC DRAINPIPE AROUND THE PERIMETER OF THE STRUCTURE. LOCATE AT THE BOTTOM OF THE FOUNDATION WALLS AND PROVIDE POSITIVE GRAVITY FLOW TO PROPERLY DESIGNED OUTLET. REFER TO ARCH DRAWINGS FOR ADDITIONAL INFORMATION.
10. SOILS EXPOSED AT THE BASE OF ALL SATISFACTORY FOUNDATION EXCAVATIONS SHALL BE PROTECTED AGAINST ANY DETRIMENTAL CHANGE IN CONDITION, SUCH AS DISTURBANCE FROM RAIN OR FROST. SURFACE RUNOFF SHALL BE DRAINED AWAY FROM THE EXCAVATIONS SHALL BE ADEQUATELY PROTECTED FROM RAINFALL OR FREEZING CONDITIONS. GROUNDWATER SHALL BE ANTICIPATED FOR EXCAVATIONS AND APPROPRIATE DEWATERING MEASURES SHALL BE EMPLOYED.
11. SLOPE FOOTING EXCAVATIONS AS REQUIRED FOR STABILITY AND SAFETY IN ACCORDANCE WITH OSHA REQUIREMENTS. PROVIDE SHEETING OR SHORING IN ACCORDANCE WITH OSHA GUIDELINES. BRACED EXCAVATIONS SHALL BE DESIGNED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF MAINE.

CONCRETE NOTES

1. CONCRETE WORK SHALL CONFORM TO "BUILDING CODE REQUIREMENTS FOR REINFORCED CONCRETE (ACI 318 LATEST)," AND "SPECIFICATIONS FOR STRUCTURAL CONCRETE (ACI 301-LATEST)". THESE PUBLICATIONS ARE AVAILABLE THROUGH THE AMERICAN CONCRETE INSTITUTE (248) 848-3800.
2. CONCRETE SHALL BE CONTROLLED CONCRETE, PROPORTIONED, MIXED, AND PLACED IN ACCORDANCE WITH THE PROVISIONS SET FORTH IN ACI 318-LATEST.
3. CONCRETE MIX DESIGN:

FOOTINGS AND FOUNDATION WALLS:
- A. STRENGTH: 3000 PSI @ 28 DAYS
- B. AGGREGATE: ¾"
- C. W/C RATIO: 0.55 MAX
- D. ENTRAINED AIR: 5% TO 7%
- E. SLUMP: 4" MAX

INTERIOR SLABS ON GRADE:
- A. STRENGTH: 3000 PSI @ 28 DAYS
- B. AGGREGATE: ¾"
- C. W/C RATIO: 0.55 MAX
- D. ENTRAINED AIR ONLY (NO ENTRAINMENT)
- E. SLUMP: 4" MAX

NOTE:
- A. ADD AIR ENTRAINING ADMIXTURE AT MANUFACTURER'S PRESCRIBED RATE TO RESULT IN CONCRETE AT POINT OF PLACEMENT HAVING THE ABOVE NOTED AIR CONTENT.
- B. ADDITIONAL SLUMP MAY BE ACHIEVED BY THE ADDITION OF A MIDRANGE OR HIGH RANGE WATER REDUCING ADMIXTURE. MAXIMUM SLUMP AFTER ADDITION OF ADMIXTURE SHALL BE 6 INCHES AND 8 INCHES RESPECTIVELY.

5. ADJUSTMENT TO CONCRETE MIXES: MIX ADJUSTMENTS MAY BE REQUESTED BY THE CONTRACTOR, WHEN CHARACTERISTICS OF THE MATERIALS, JOB CONDITIONS, WEATHER OR OTHER CIRCUMSTANCES WARRANT, AT NO ADDITIONAL COST TO THE OWNER AS ACCEPTED BY THE ARCHITECT. LABORATORY TEST DATA FOR THE REVISED MIX DESIGN AND STRENGTH DATA MUST BE SUBMITTED AND ACCEPTED BY THE ARCHITECT BEFORE INCORPORATING INTO THE WORK.

NOTE:
- A. WATER MAY BE ADDED AT THE PROJECT ONLY IF THE MAXIMUM SPECIFIED WATER-CEMENT RATIO AND SLUMP ARE NOT EXCEEDED. CONTRACTOR SHALL HAVE BATCH TICKET INDICATING WATER AND CEMENT MIXED IN THE PLANT, AND SHALL RECORD THE WATER ADDED AS EVIDENCE THAT THE WATER-CEMENT RATIO HAS NOT BEEN EXCEEDED.
- B. ADDITIONAL DOSES OF SUPER PLASTICIZER SHOULD BE USED WHEN DELAYS OCCUR AND REQUIRED SLUMP HAS NOT BEEN MAINTAINED. A MAXIMUM OF TWO ADDITIONAL DOSAGES ARE PERMITTED PER ACI 212.3R RECOMMENDATIONS.

6. CONCRETE MIXING:
- A. JOB-SITE MIXING OF CONCRETE WILL NOT BE PERMITTED.
- B. READY-MIX CONCRETE MUST COMPLY WITH THE REQUIREMENTS OF ASTM C94, AND AS SPECIFIED HEREIN. PROVIDE BATCH TICKET FOR EACH BATCH DISCHARGED AND USED IN WORK, INDICATING PROJECT NAME, MIX TYPE, MIX TIME, BATCH QUANTITY, AND PROPORTIONS OF INGREDIENTS.
7. CONCRETE SHALL NOT BE PLACED IN WATER OR ON FROZEN GROUND.
8. PROVIDE PVC SLEEVES WHERE PIPES PASS THROUGH EXTERIOR CONCRETE OR SLABS CAST ON GRADE. ADJACENT SLEEVES SHALL BE SPACED A MINIMUM OF THREE DIAMETERS APART. NO PENETRATIONS SHALL BE MADE THROUGH FOOTINGS WITHOUT WRITTEN PERMISSION FROM ENGINEER.
9. REINFORCING BARS SHALL CONFORM TO ASTM A615 GRADE 60 DEFORMED BARS AND SHALL BE DETAILED, FABRICATED AND PLACED IN ACCORDANCE WITH ACI 315, LATEST EDITION.
10. FIBER REINFORCEMENT SHALL BE TYPE II SYNTHETIC VIRGIN HOMOPOLYMER POLYPROPYLENE FIBERS CONFORMING TO ASTM C1116.
11. MINIMUM CONCRETE PROTECTIVE COVERING FOR REINFORCEMENT, UNLESS NOTED OTHERWISE, SHALL BE AS FOLLOWS:
    - A. SURFACES CAST AGAINST AND PERMANENTLY IN CONTACT WITH EARTH, 3.0"
    - B. FORMED SURFACES IN CONTACT WITH EARTH OR EXPOSED TO WEATHER
      - #5 BARS, 5/8" DIAMETER WIRE, AND SMALLER, 1.5"
      - #6 THROUGH #11 BARS, 2.0"
    - C. SURFACES NOT IN CONTACT WITH EARTH OR EXPOSED TO WEATHER WALLS, SLABS, JOISTS #11 AND SMALLER, 1.0"
14. REINFORCEMENT SHALL BE CONTINUOUS AROUND CORNERS AND AT INTERSECTIONS. PROVIDE LAPPED BARS AT NECESSARY SPLICES OR HOOKED BARS AT DISCONTINUOUS ENDS. SEE SCHEDULE THIS DRAWING FOR REQUIRED REBAR LAP SPLICE LENGTHS.
15. WELDING OF REINFORCEMENT IS NOT PERMITTED.
16. FOR ALL OPENINGS IN CONCRETE WALLS AND SLABS, PROVIDE SUPPLEMENTAL REINFORCING AROUND OPENING AS SHOWN ON THE CONTRACT DOCUMENTS TYPICAL DETAILS.
17. PROVIDE A MIN. 15 MIL, POLYOLEFIN GEOMEMBRANE TYPE VAPOR BARRIER UNDER INTERIOR SLABS CAST ON GRADE. SEE TYPICAL DETAILS FOR SPECIFIC UNDERSLAB PREPARATION REQUIREMENTS.
21. CONCRETE SHALL BE PLACED WITHOUT HORIZONTAL CONSTRUCTIONS JOINTS EXCEPT WHERE SHOWN OR NOTED. VERTICAL CONSTRUCTION JOINTS AND STOPS IN CONCRETE WORK SHALL BE MADE AT MIDSPAN OR AT POINTS OF MINIMUM SHEAR.
22. ANCHOR RODS THAT ARE TO BE IN CONTACT WITH PRESSURE TREATED LUMBER SHALL BE HOT-DIPPED GALVANIZED.
23. ALL GROUT BENEATH BASE PLATES & BEARING PLATES SHALL BE "5-STAR" 5000 PSI NON-SHRINK GROUT BY U.S. GROUT CORP., OR APPROVED EQUAL.
24. INSTALLATION OF REINFORCEMENT SHALL BE COMPLETE AT LEAST 24 HOURS PRIOR TO THE SCHEDULED CONCRETE PLACEMENT. NOTIFY ARCHITECT AND STRUCTURAL ENGINEER OF COMPLETION AT LEAST 24 HOURS PRIOR TO THE SCHEDULED COMPLETION OF THE INSTALLATION OF REINFORCEMENT.

STRUCTURAL STEEL NOTES

1. STRUCTURAL STEEL FABRICATION, ERECTION, AND CONNECTION DESIGN SHALL CONFORM TO AISC "SPECIFICATION FOR THE DESIGN FABRICATIONS, AND ERECTION OF STRUCTURAL STEEL" 13TH EDITION, AND THE "CODE OF STANDARD PRACTICE", LATEST EDITION.
2. STRUCTURAL STEEL: STEEL PLATES, SHAPES, AND BARS, SHALL CONFORM TO ASTM A36 UNLESS NOTED OTHER WISE (U.N.O.). STRUCTURAL STEEL SHAPES DESIGNATED ON THE DRAWINGS FOR WIDE-FLANGE SECTIONS: ASTM A992 (ASTM A572 GRADE 50 WITH SPECIAL REQUIREMENTS PER AISC TECHNICAL BULLETIN #3 DATED MARCH, 1997)
3. STRUCTURAL TUBING: CONFORM TO ASTM A500 GRADE B, 46 KSI.
4. FIELD CONNECTIONS SHALL BE BOLTED USING 3/4" DIAMETER ASTM A325N HIGH STRENGTH BOLTS (U.N.O.).
5. WHERE WELDING IS INDICATED, ALL WELDING SHALL CONFORM TO AWS D1.1-LATEST EDITION. ELECTRODES SHALL CONFORM TO AWS A5.1 E70XX SERIES WITH PROPER ROD TO PRODUCE OPTIMUM WELD (LOW HYDROGEN).
6. ALL STEEL SHALL BE FABRICATED AND SHIPPED AS BARE UN-PAINTED STEEL.
7. SEE CONCRETE NOTES AND DRAWINGS FOR ANCHOR BOLT INFORMATION, TYP.
8. PROVIDE 3/8" MINIMUM STIFFENER PLATES EACH SIDE OF BEAM WEB AT BEAMS FRAMING OVER COLUMNS AND AT COLUMNS OVER BEAMS.
9. PROVIDE NON-SHRINK GROUT UNDER ALL ELEMENTS SUPPORTED BY FDNS UNLESS OTHERWISE NOTED. LEVELING PLATES SHALL BE SET AND GROUTED PRIOR TO ERECTING COLUMNS.
10. PROVIDE ALL ANGLES, PLATES, ANCHORS, BOLTS, ETC., SHOWN ON ARCHITECTURAL DRAWINGS.

REBAR LAP SPLICE TABLE

BAR SIZE	LAP LENGTH
#3	24"
#4	32"
#5	42"
#6	48"
#7	72"
#8	80"

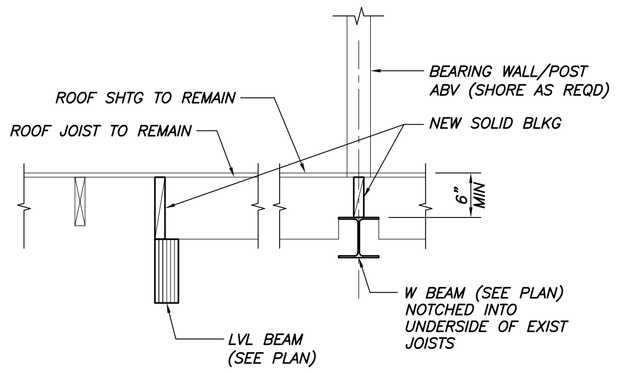

SECTION 1 S101 — 3/4"=1'-0"

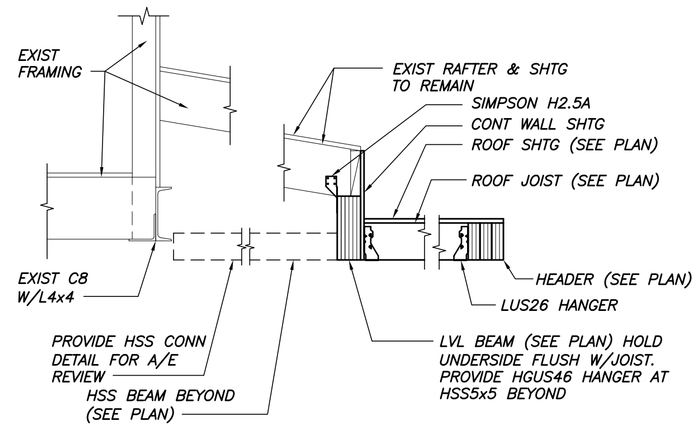

SECTION 2 S101 — 3/4"=1'-0"

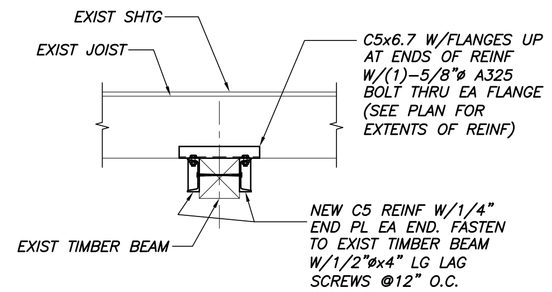

SECTION 3 S101 — 3/4"=1'-0"

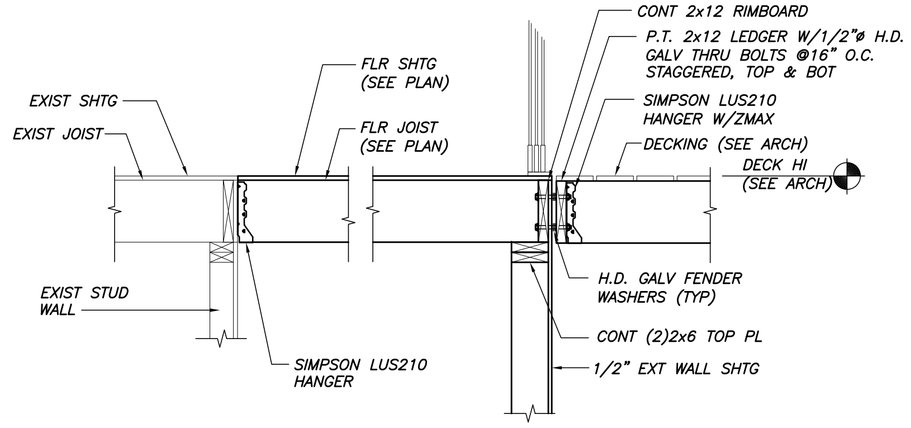

SECTION 4 S101 — 3/4"=1'-0"

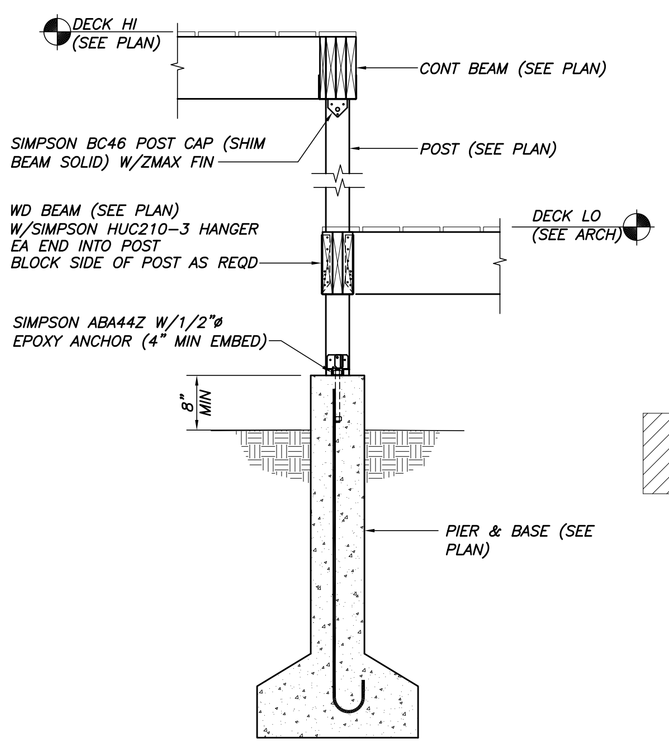

SECTION 5 S101 — 3/4"=1'-0"

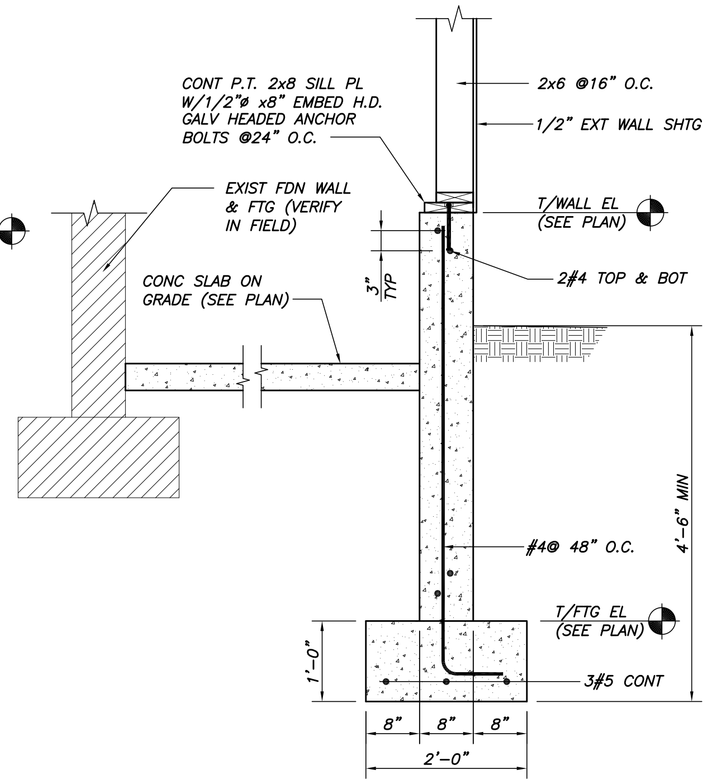

SECTION 6 S101 — 3/4"=1'-0"

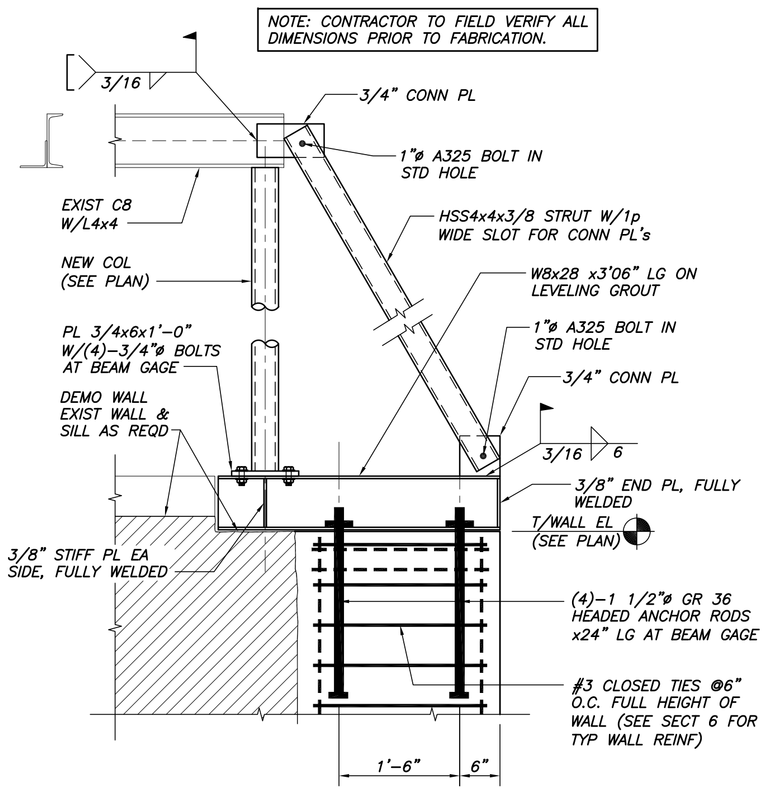

SECTION 7 S101 — 3/4"=1'-0"

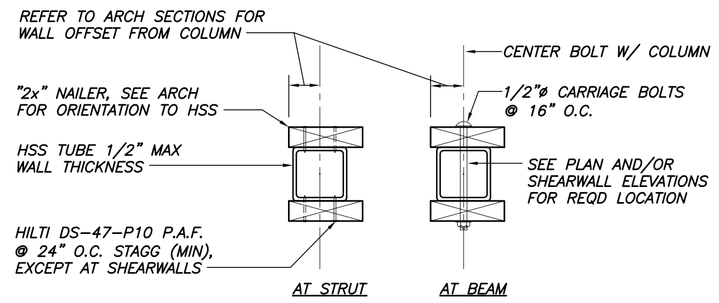

TYP WOOD NAILER TO HSS COL DETAIL
N.T.S.

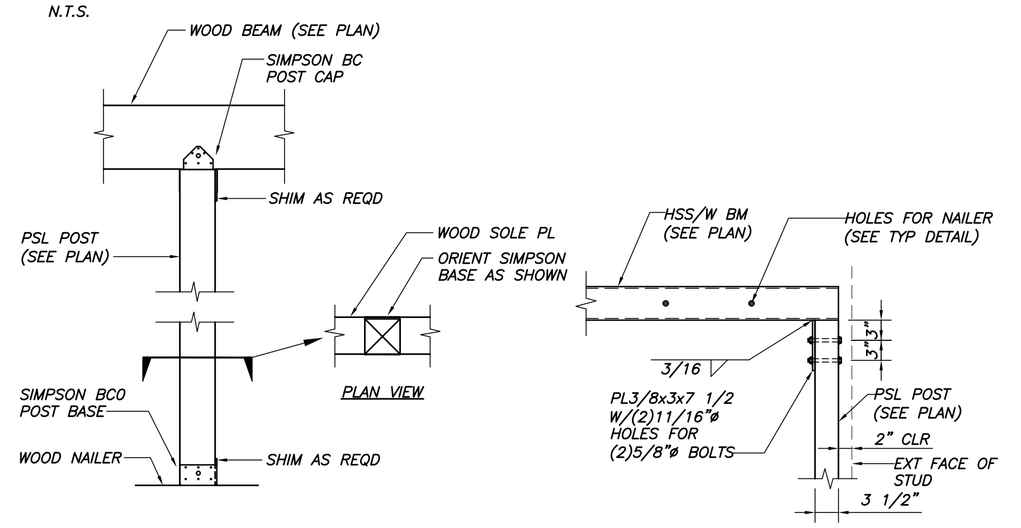

TYP INT POST CAP/BASE, U.N.O.
N.T.S.

TYP HSS/W BEAM TO PSL POST
N.T.S.

Scott Simons Architects
75 York Street, Portland, Maine 04101
www.simonsarchitects.com
207.772.4656

STRUCTURAL ENGINEER
Becker Structural Engineers, Inc.
75 York Street
Portland, ME 04101
phone 207.897.1838
Nathan Merrill, PE
email: nathan@beckerstructural.com

BUILDER
Steve Brann Building & Remodeling
39 South Freeport Road
Freeport, ME 04032
ph: 207.865.6674
alt: 207.671.7353
stevebrann@stevebrannbuilding.com

PROJECT NAME:

ALFOND RESIDENCE

RENOVATIONS & ADDITION
143 VAUGHAN STREET,
PORTLAND, ME 04101

SEAL

THIS DRAWING IS THE PROPERTY OF SCOTT SIMONS ARCHITECTS (SSA) AND IS NOT TO BE COPIED OR REPRODUCED IN PART OR WHOLE.
2013 © SCOTT SIMONS ARCHITECTS, LLC

REVISION:

DATE OF ISSUE:	May 1, 2013
PROJECT NUMBER:	2013-0040 alfond renovation
STATUS:	100% Construction Documents

SECTIONS & DETAILS

S102