

1/8" = 1'-0"

A1 HIGH ROOF FRAMING PLAN


LOAD DIAGRAM FOR 44LHSP
(TOP CHORD PITCHED 2-WAYS, UNDERSLING)

COORDINATE LOCATIONS OF LOAD FROM MECHANICAL UNITS W/ CONTRACTOR


- ROOF FRAMING PLAN NOTES:**
1. TOP OF STEEL ELEVATION = 23'-1 1/2" UNLESS NOTED (TOS)
 2. ALL BEAM TO BEAM CONNECTIONS TO BE DONE WITH A SINGLE PLATE CONNECTION, 3/8" THICK.
 3. TYPICAL JOIST BEARING PLATE = 7 1/2" x 3/8" x 0'-7 1/2" UNLESS NOTED.
 4. TYPICAL BEAM BEARING PLATE = 7 1/2" x 3/8" x 0'-7 1/2" UNLESS NOTED.
- ↳ INDICATES SPAN OF 1/2" B-DECK - SEE SPECS.
1. PROVIDE 1/4" NEOPRENE SPACER BETWEEN BEAM WEB AND SHEAR TAB.
 2. CONTINUOUS L4x4x3/8" FASTENED TO WALL w/ 1/2" Ø HILTI HIT HI-20 ANCHOR BOLTS @ 26" O.C. (MAX)
 3. SEE DETAIL E819F-500 FOR CONNECTION OF BEAM TO CMU WALL.

PERMIT SET
JUNE 23, 2006

SF-101
HIGH ROOF FRAMING PLAN
DELTA ROOFING
PORTLAND, MAINE

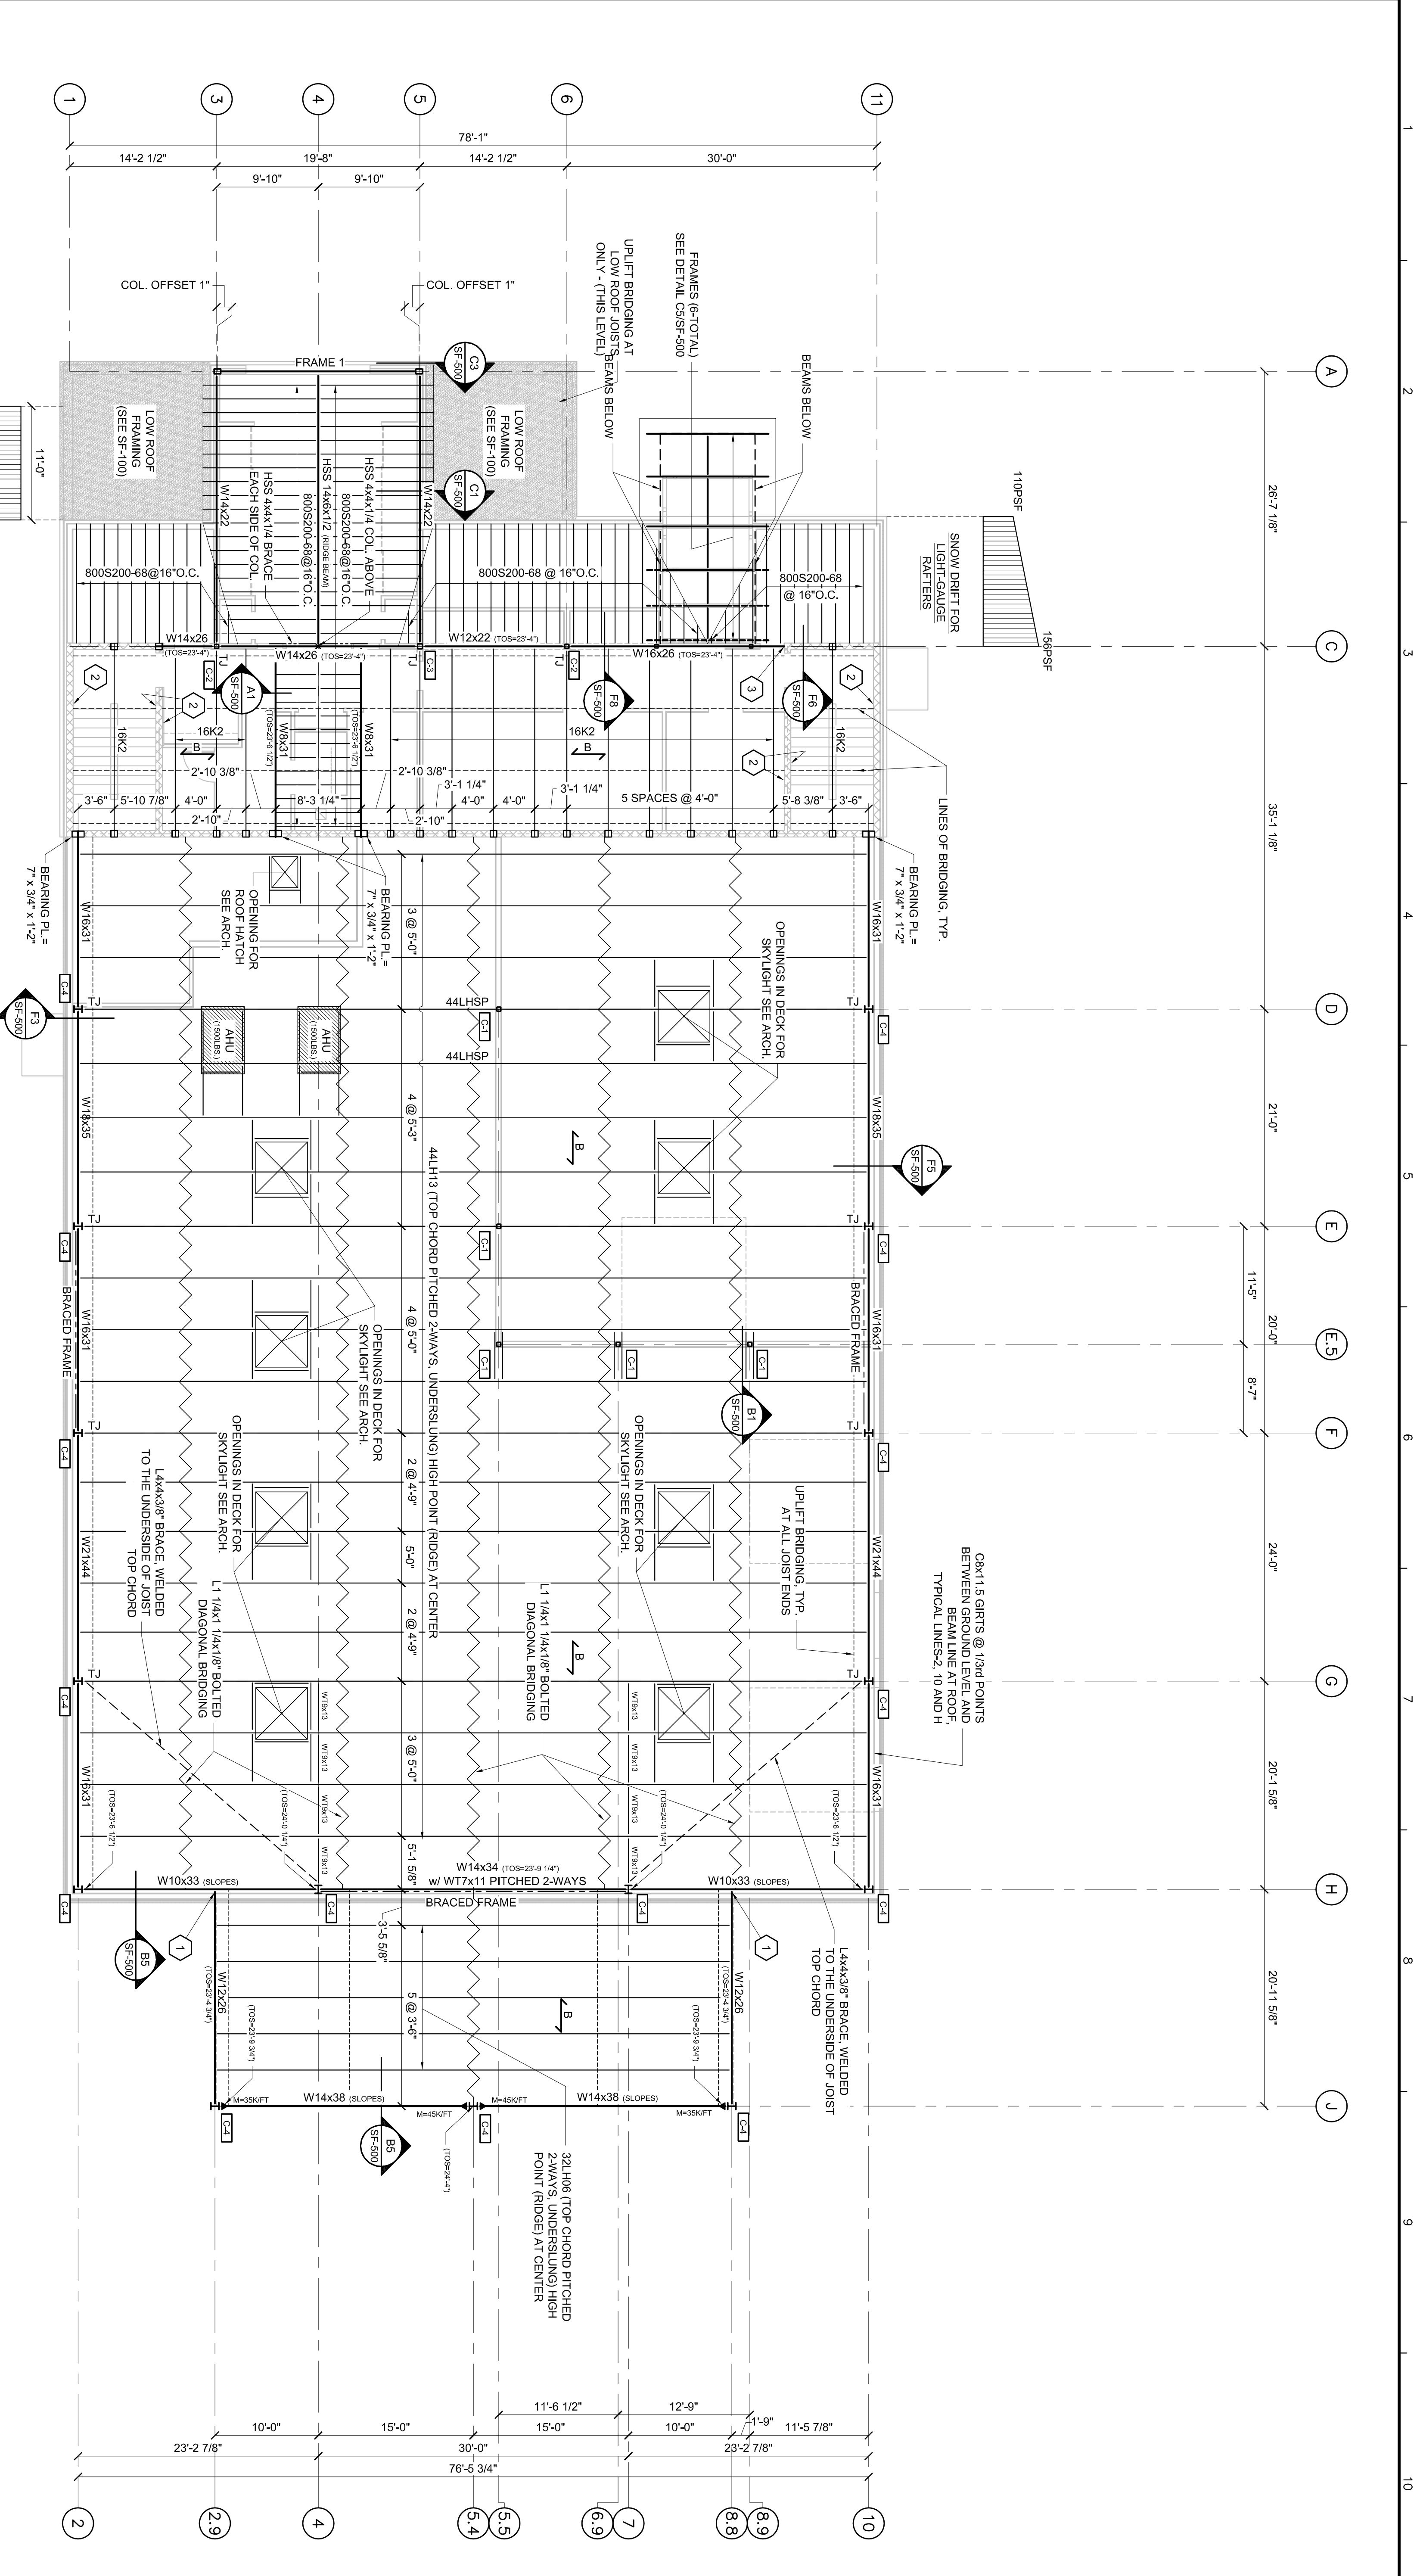

REVISIONS				
NUMBER	DATE	BY	DESCRIPTION	

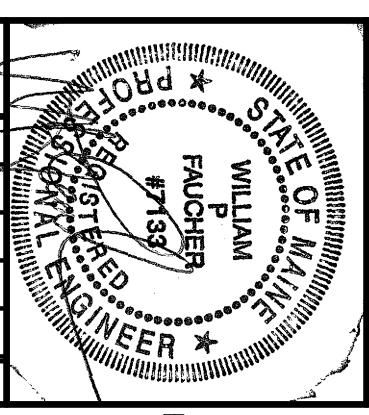

Allied Engineering
Structural Mechanical Electrical Commissioning

160 Veranda Street
Portland, Maine 04103
T: 207.221.2260
F: 207.221.2266
Web: www.allied-eng.com