


Demolition Notes

- 1 Remove existing window, frame and blocking. Prep opening for infill wall.
- 2 Remove existing door, overhead door or window.
- 3 Remove existing wall.
- 4 Remove existing flooring, backing and accessories.
- 5 Remove existing plumbing fixture.
- 6 Remove existing lighting fixtures from ceiling.
- 7 Remove existing stair treads, riser and structure from finished floor to finished floor.
- 8 Remove existing lavatory and toilet cap all water lines, waste lines and floor drain at floor level.
- 9 Remove existing guardrail system to finished floor.
- 10 Remove existing floor and subfloor. Cut existing framing for new stair.
- 11 Remove existing shaft and ductwork. Prep floor opening for new framing.
- 12 Remove perimeter drywall or plaster and all electrical wiring, plumbing back to face of exterior masonry.
- 13 Remove existing drywall from EAST wall.
- 14 Remove bulkhead and foundation as required for new entry stair foundation.
- 15 Remove floor framing down to existing stone foundation.
- 16 Remove existing cupboards and/or cabinets and/or existing open shelving.
- 17 Remove existing steam radiator and steam lines. Cap all lines above (or below) ceiling/floor penetration.
- 18 Plumbing equipment to be removed and relocated to basement of Sanctuary.
- 19 Remove existing mezzanine framing, decking and ceiling systems.

10 First Floor Demolition Plan
 0 4 12 24

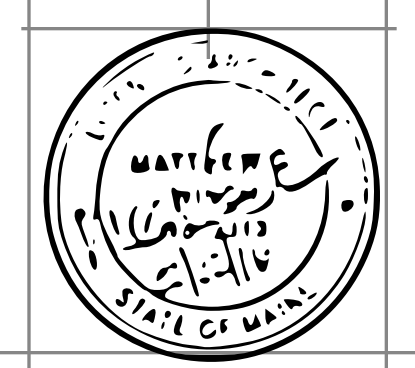

Revisions	date