

MARVIN DESIGN GALLERY

a complete window and door showroom
by Eldredge


317 Marginal Way, Portland, Maine 04101

Jeremy Bate, CDT
Manager

207-772-2003 office • 207-772-0418 fax
207-337-3001 cell

jbate@marvinportland.com
www.MarvinbyEldredge.com

FRENEY RESIDENCE

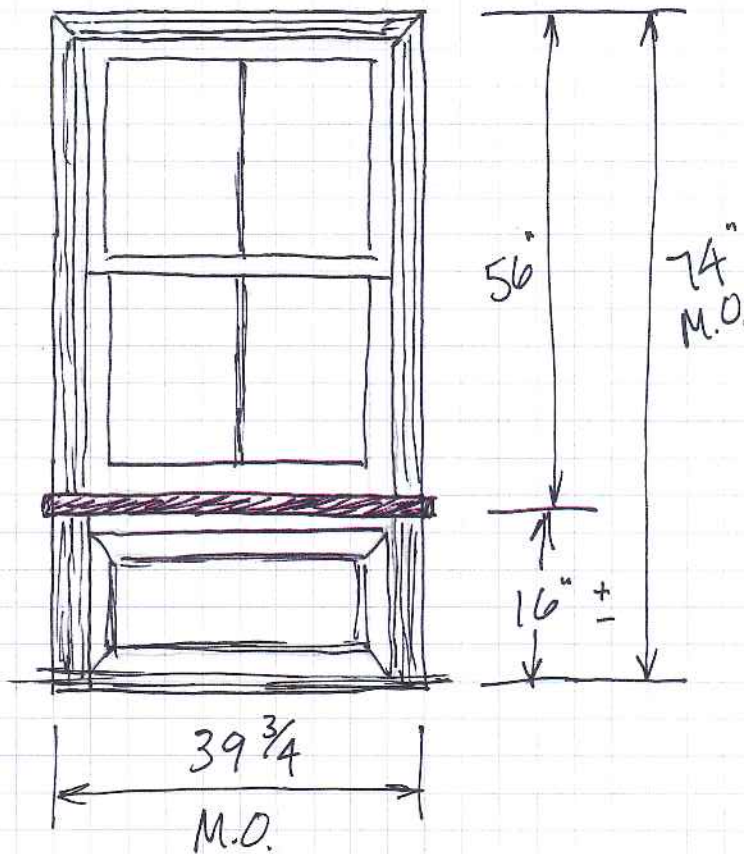

MARVIN DESIGN GALLERY

a complete window and door showroom
by Eldredge

Marvin Design Gallery

317 Marginal Way
Portland, ME 04101
USA

(207) 772-2003 Fax: (207) 772-0418

Sales Person: Dave Thibeau
dthibeau@marvinportland.com
www.marvinbyeldredge.com

August 19, 2015

Sheri Feeney
119 Chadwick St
Portland, ME 04102
Mobile: (207) 232-5507
Email: sfeeney@maine.rr.com

Project: Feemey Residence
Wood Windows

PROPOSAL

The Marvin Design Gallery proposes to supply all product as listed below. Please review to ensure all sizing and specifications are correct and meet your project requirements. Marvin products are special order items and may not be changed, cancelled or returned once the order is approved and processed.

GENERAL PRODUCT SPECIFICATIONS EXCEPT AS NOTED BELOW

Manufacturer: Marvin

Product Line: Ultimate

Surface: Wood

Glass: Low E 1 w/ Argon

Grille/Divided Lite Bar Type: 7/8" Simulated Divided Lite w/ Spacer Bar as Drawn

Interior Finish: Primed Pine

Exterior Finish: Primed Pine

Interior Casing: None

Exterior Casing: None

Jamb Depth: 3 1/4" Replacement


Screen: Full Screen

Screen Color: Frame: Choice of 19 Colors

Jambliner Color: Beige

Door Hardware: Satin Taupe

Item#: 1 Location: KITCHEN WOOD WINDOWS Qty: 2 Unit Price: \$1,349.46 Total: \$2,698.92




Manufacturer: Marvin; wood ultimate double hung; call number: custom; frame size: 35" x 56" (with subsill); rough opening: 36" x 56 1/2" (with subsill); 4 9/16" jamb depth; satin taupe sash lock; beige jamb hardware; primed pine interior; back prime; primed pine exterior; no exterior casing; 5" long sill horns; screen: aluminum screen (screen/combo ship loose); screen wire: charcoal fiberglass mesh, screen: stone white surround; primed pine simulated thick subsill; installed installation brackets; glass add for all sash/panels; non finger-jointed blindstop; non finger-jointed subsill; non finger-jointed sill; # putty glaze sash on both W8535 and 7/8" SDL putty on all W8536.

Top & Bottom Sashes

Insulated glass, low E1 with argon, ovolo interior glazing profile, 7/8" simulated divided lite – with spacer bar – stainless – rectangular grille – special lite cut 3 wide x 2 high: primed pine exterior – primed pine interior, primed pine sash exterior, primed pine sash interior, stainless perimeter and spacer bar.

Item#: 2 Location: BSMT SASH Qty: 4 5 Unit Price: \$458.46 Total: \$1,833.84



Manufacturer: Marvin; wood ultimate casement – stationary; configured part: sash for: call number: custom; rough opening: 38 5/8" x 22 5/16" (with subsill); outside measurement: 36" x 19 1/4"; 3/4" insulated glass; low E1 with argon; ogee interior glazing profile; 7/8" simulated divided lite – with spacer bar – stainless – rectangular grille – special lite cut 4 wide x 2 high: ~~primed pine exterior~~ fiberglass exterior – primed pine interior; primed pine interior; fiberglass exterior; stainless perimeter and spacer bar; standard bottom rail; beige weather strip.

<u>Total Material</u>	<u>\$4,532.76</u>
Sub Total	\$4,532.76
<u>Sales Tax (5.5%)</u>	<u>\$249.30</u>

Grand Total

\$4,782.06

Payment schedule terms

\$2,391.03 deposit due upon acceptance

\$2,391.03 deposit due upon delivery

THIS PROPOSAL IS VALID FOR 30 DAYS

Acceptance Of Proposal

The above prices, specifications and conditions are satisfactory and hereby accepted. Any changes or modifications to this contract must be in writing and signed by both parties. The Marvin Design Gallery is authorized to place the order as specified above. Payments will be made as outlined.

1/4" = 1' 0" - All drawings are exterior views.