STEEL COLUMN SCHEDULE

COLUMN MARK	A–3	A–4.2	A–7	B–4.2	B–7	C–1	D–4.2	D–7	D.2–3	E–1	E–4	E.8–3	F–7	F–8.4	F–10	F–12.8	F–13.8	F–16	F.5–1	F.5–2	G–2	G–4	H–7	H–10	J–1	J–3	J–4	J–13	J–14	J–16	L–7.1	L–9	L–11	L–12	L–13	L–14	L–16	L.8–1	M–3	M–5	M–5.8	N–1	N–3	N–5	N–5.8	N–8.2	N–9	N–12	N–13	N–14	N–16
SECOND FLR	HSS5x5x1/4	HSS5x5x1/4	HSS5x5x1/4	HSS8x8x3/8	HSS5x5x1/4	HSS5x5x1/4		HSS5x5x3/8	HSS8x8x3/8	HSS5x5x3/8	HSS6x6x1/2	HSS8x8x5/8	HSS5x5x1/2	HSS5x5x1/4	HSS5x5x1/2	HSS5x5x1/4	HSS5x5x1/4	HSS5x5x3/8	HSS5x5x3/8	HSS5x5x3/8	HSS6x6x1/4	HSS8x8x5/16	HSS8x8x5/16	HSS8x8x5/16	HSS5x5x1/4		HSS6x6x1/4	HSS6x6x1/4	HSS5x5x3/8	HSS6x6x3/8	HSS6x6x3/8	HSS6x6x3/8	HSS6x6x3/8	HSS6x6x3/8	HSS6x6x3/8	HSS5x5x3/8	HSS5x5x1/4	HSS8x8x5/16	HSS5x5x1/4	HSS5x5x1/4	HSS5x5x1/4	HSS5x5x1/4	HSS5x5x1/4	HSS5x5x1/4	HSS5x5x1/4	HSS5x5x1/2	HSS5x5x1/4	HSS5x5x1/4	HSS5x5x1/4	HSS5x5x1/4	HSS5x5x3/8
FIRST FLR							HSS5x5x1/4																			HSS6x6x1/4	HSS5x5x1/4						HSS6x6x1/4																			
LOWER LEVEL																																																			
BOT OF STEEL COLUMN BASE PL ELEVATION U.N.O.	38'–1"	38'–1"	38'–1"	38'–1"	45'–1"	38'–1"	38'–1"	49'–11 1/2"	38'–1"	38'–1"	38'–1"	38'–1"	49'–9"	50'–3 1/2"	49'–11 1/2"	50'–3 1/2"	50'–3 1/2"	51'–1"	38'–1"	38'–1"	38'–1"	38'–1"	38'–1"	38'–1"	50'–3 1/2"	38'–1"	38'–1"	38'–1"	38'–1"	49'–9"	38'–5"	38'–1"	38'–1"	38'–1"	38'–5"	38'–5"	49'–9"	49'–7 1/2"	37'–1"	38'–1"	38'–1"	50'–9"	49'–9"	50'–3 1/2"	50'–3 1/2"	51'–1"	49'–11 1/2"	50'–3 1/2"	50'–3 1/2"	50'–1 1/2"	51'–1"
BASE PL TYPE	BP–D	BP–D	BP–F	BP–B	BP–D	BP–C	BP–C	BP–D	BP–J	BP–D	BP–B	BP–J	BP–E	BP–D	BP–E	BP–D	BP–D	BP–F	BP–E	BP–H	BP–B	BP–A	BP–A	BP–A	BP–D	BP–B	BP–C	BP–B	BP–B	BP–D	BP–B	BP–B	BP–B	BP–B	BP–G	BP–B	BP–D	BP–D	BP–A	BP–C	BP–C	BP–F	BP–D	BP–D	BP–D	BP–D	BP–E	BP–D	BP–D	BP–D	BP–F

PL WASHER SCHEDULE

ANCHOR ROD ø	PL WASHER SIZE
3/4"	1/4"x2"x2"
1"	3/8"x3"x3"
1 1/4"	1/2"x3"x3"



BP–A

PL 1"x14"x1'–12"
W/(4)–1 5/16"ø HOLES FOR
(4)–3/4"ø ANCHOR RODS
W/9" EMBED & 5" PROJECTION



BP–B & BP–G

PL 1"x12"x1'–0" @ BP–B
PL 1 1/4"x12"x1'–0" @ BP–G
W/(4)–1 5/16"ø HOLES FOR
(4)–3/4"ø ANCHOR RODS W/9"
EMBED & 5" PROJECTION



BP–C & BP–H

PL 3/4"x11"x0'–11" @ BP–C
PL 1"x11"x0'–11" @ BP–H
W/(4)–1 5/16"ø HOLES FOR
(4)–3/4"ø ANCHOR RODS W/9"
EMBED & 5" PROJECTION



BP–D & BP–E

PL 1"x8"x1'–0" @ BP–D
PL 1 1/4"x8"x1'–0" @ BP–E
W/(4)–1 5/16"ø HOLES FOR
(4)–3/4"ø ANCHOR RODS W/9"
EMBED & 5" PROJECTION



BP–F

PL 1"x9"x0'–9"
W/(4)–1 5/16"ø HOLES FOR
(4)–3/4"ø ANCHOR RODS
W/9" EMBED & 5" PROJECTION



BP–J

PL 2"x16"x1'–4"
W/(4)–2 1/16"ø HOLES FOR
(4)–1 1/4"ø ANCHOR RODS
W/36" EMBED & 6" PROJECTION

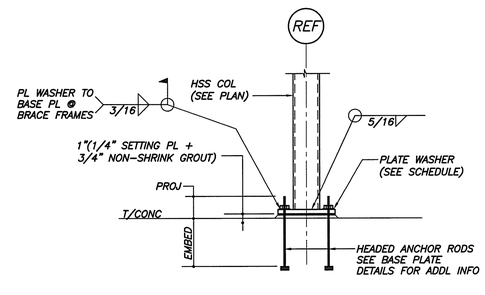

TYP COL BASE DETAIL U.N.O.
N.T.S.

BECKER structural engineers, inc.
73 York Street
Portland, ME 04101-4701
Tel 207-879-1838
Fax 207-879-1822
mail@beckerstructural.com

STATE OF MAINE
MATTHEW J. MILLER
No. 11298
REGISTERED PROFESSIONAL ENGINEER

GAWRON TURGEON ARCHITECTS
29 Black Point Road
Scarborough, ME 04074
www.gawronturgeon.com
Tel. 207 . 883 . 6307
Fax. 207 . 883 . 0361

AVESTA HOUSING

FLORENCE HOUSE

PORTLAND, MAINE

Preble Street

REVISIONS

#	DATE	DESCRIPTION

DATE:	09.02.08
PROJECT #	1686
DRAWN BY:	MCN
CHECKED BY:	MJM
DRAWING SCALE	1/8"= 1'-0"

SHEET TITLE

COLUMN SCHEDULE

S1.6

© COPYRIGHT 1985–2006
REPRODUCTION OR REUSE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION OF GAWRON TURGEON ARCHITECTS IS PROHIBITED