| 1-8703, FAX: 874-871 | PERMIT ISSUED | Permit Issued: | | CITY OF PORTLAND | Zone: CBL: CF C | Special Zone or Reviews: | ☐ Shoreland ☐ Wetland | | ☐ Site Plan maj ☐ minor ☐ mm ☐ | Zoning Appeal Variance | ☐ Conditional Use | doitornogona oinotoill | ■ Not in District or Landmark □ Does Not Require Review □ Requires Review | Action: | ☐ Approved ☐ Approved with Conditions ☐ Denied ☐ Date: | | | CEO DISTRICT | |
|--|------------------------------------|----------------|--|----------------------|-----------------|--|-----------------------|-------|--------------------------------|--|-------------------|------------------------|---|---------|---|-------------|--------------|---|--|
| mit Application 389 Congress Street, 04101, Tel: (207) 874 | Leasee/Buyer's Name: BusinessName: | 67663 | Proposed Use: COST OF WORK: PERMIT FEE: \$20,000,00 \$120,00 | Approved INSPECTION: | | PEDESTRIAN ACTIVITIES DISTRICT (P.U.D.) Action: Approved | with Conditions: | Date: | - | This permit application doesn't preclude the Applicant(s) from meeting applicable State and Federal rules. | | | | 60 | r of record and that I have been of this jurisdiction. In addition, | TO A MITTER | SS: DAIE: | RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE CEO | White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector |

| Foundation: Framing: Plumbing: Final: Other: | | 6-2496- Expections Started Check for Sexpects The 25 April 152 April 1-25 Ale 165 Reported Forms in place (8 when 4 hearth 152 brokes April 2 members 1212 brokes 1212 for 152 brokes April 2 members Headers 2x12's) 8-20-96 No garage Startet / Wall 5/8" X type |
|--|--|--|
| Date | | Cany by head |

| | BUILDING PERMIT REPORT |
|------|--|
| DAT | E: 10 Syne/90 ADDRESS: 12-6Th STreey. |
| REA | SON FOR PERMIT: To Construct 22x24' attached Carye |
| BUI | DING OWNER: Beautier |
| CON | TRACTOR: M. RUSSO APPROVED: */, */0 X// APPRICANT: DENTED: */3 X/Y |
| PERM | TIT APPLICANT: DENIED: *13 *14 |
| | CONDITION OF APPROVAL OR DENTAL |
| 1. | Before concrete for foundation is placed, approvals from the |
| | Development Review Coordinator and Inspection Services must be |
| | obtained. (A 24 hour notice is required prior to inspection) |
| 2. | Precaution must be taken to protect concrete from freezing. |
| 3. | It is strongly recommended that a registered land surveyor check all |
| | foundation forms before concrete is placed. This is done to verify |
| | that the proper setbacks are maintained. |
| 4. | All vertical openings shall be enclosed with construction having a fire |
| | rating of at least one(1) hour, including fire doors with selfclosers. |
| 5. | Each apartment shall have access to two(2) separate, remote and |
| | approved means of egress. A single exit is acceptable when it exits |
| | directly from the apartment to the building exterior with no |
| 6. | The boiler shall be protected by enclosing with one(1) hour fire-rated |
| •• | construction including fire doors and ceiling, or by providing |
| | automatic extinguishment. Sprinkler piping serving not more than six |
| | sprinklers may be connected to a domestic water supply having a |
| | capacity sufficient to provide 0.15 gallons per minute, per square foot |
| | of floor throughout the entire area. An INDICATING shut-off valve |
| | shall be installed in an accessible location between the sprinkler and |
| | the connection to the domestic water supply. Minimum pipe size shall |
| | be 3/4 inch copper or 1 inch steel. Maximum coverage area of a |
| 7 | residential sprinkler is 144 sq. feet per sprinkler. |
| 7. | Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door |
| | approved for emergency egress or rescue. The units must be operable |
| | from the inside without the use of special knowledge or |
| | separate tools. Where windows are provided as means of egress or |
| | rescue, they shall have a sill height not more than 44 inches (1118mm) |
| | above the floor. All egress or rescue windows from sleeping rooms |
| | shall have a minimum net clear opening height dimension of 24 inches |
| | (610mm). The minimum net clear opening width dimension shall be 20 |

shall bear the label of an approved agency and be of an approved type.

9. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's building code Chapter 9, section 19, 919.3.2(BCCA National Building Code/1993), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):

inches (508 mm), and a minimum net clear opening of 5.7 sq. feet. A portable fire extinguisher shall be located as per NFPA #10. They

INSPECTION OF PREM 12 SYTY STREET Job Number: 196-109 I HEREBY CERTIFY TO CLASSIC TITLE, PORTLAND, MAINE THEET BANK AND ITS TITLE Inspection Date: 05-01-93 OHNER: JOHN A AND TAMARA & Scale: 1 = 20 The monumentation is set in harmony with current deed description. BEAULEU The building setbacks are in conformity 80 1-1/with town zoning requirements. The dwelling does not appeared fall within the special flood hazard zone as delineated by the Federal Emergency Management Agency. 193 The land does not appeared fall within the special flood hazard zone as indicated on community-panel # 23 0051 0007B EXISTING DECK NEL Existing STORY WOOD TRUCTURE ON A CONCRETE FOUNDETION TO LEXINATON AUE THIS PROPERTY IS SUBJECT TO ALL RIGHTS AND EASEMENTS OF RECORD. THOSE THAT ARE EVIDENT ARE SHOWN. THIS PLAN MIGHT NOT REVEAL CONFLICTS WITH ABUTTING DEEDS. PLAN BOOK 9 PAGE 195 LOT FF, PART 198 BRUCE R. BOWMAN, INC. DEED BOOK 1817 PAGE I COUNTY COMBERLAND 48 Mill Road Cumberland, Maine 04021 THIS PLAN IS NOT FOR RECORDING Drawn by JHM Phone: (207)829-3959

| Applicant: Michael Russo Date: 6/10/96 |
|---|
| Address: 12 Sixth 8. |
| Assessors No.: 340-E-15416 |
| CHECK LIST AGAINST ZONTNG ORDTNANCE |
| Date - Existy 1985 |
| Zone Location - R-3 |
| Interior or corner lot - |
| Use - New garage (Attached) 22'x24' |
| Sewage Disposal - |
| Rear Yards - 25 reg - 40'+ 8hown per 344 |
| Rear Yards - 25/reg - 40/t Shown per Scala Side Yards - 8/6" Shown |
| Front Yards - 25' reg -27' Shown |
| Projections - |
| Height - 1 Story |
| Lot Area - 8,007# Building Area - 256 1 6 A 6 A 6 A 6 2001.75# MAX |
| |
| Area per Family - |
| Width of Lot - |
| Lot Frontage - |
| Off-street Parking - |
| Loading Bays - |
| Site Plan - |
| Shoreland Zoning - $26 \times 34 = 884$ Flood Plains - $(0 \times 20 = 200)$ |
| Flood Plains - $(0 \times 70 = 200)$ |
| 3 x 16 = 48 |
| |
| 1132 / |
| 22×24 = 528 |
| (6607) |

- 1. In the immediate vicinity of bedrooms
- 2. In all bedrooms

3. In each story within a dwelling unit, including basements In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted.

Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Charter 4 contion 407.0 of the POCA/1993)

side. (Chapter 4 section 407.0 of the BOCA/1993)

Guardrail & Handrails-A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2 M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect.

12. All exit signs, lights, and means of egress lighting shall be done in accordance with Chapter 10, section & subsections 1023. & 1024. of the

City's building code. (The BOCA National Building Code/1993)

13. Stair construction in Use Group R-3 & R-4 is a minimum of 9" tread and 8-1/4" maximum rise.—All other Use Group minimum 11" tread, 7" maximum rise.

X 14. Headroom in habitable space is a minimum of 7'6".

15. The minimum headroom in all parts of a stairway shall not be less than 80 inches.

16. All construction and demolition debris must be disposed at the City's authorized reclamation site. The fee rate is attached. Proof of such disposal must be furnished to the office of Inspection Services before final Certificate of Occupancy is issued or demolition permit is granted.

17. Section 25-135 of the Municipal Code for the City of Portland states,
"No person or utility shall be granted a permit to excavate or open any
street or sidewalk from the time of November 15 of each year to April

15 of the following year".

18. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act, Title 5 MRSA refers, shall obtain a certification from a design professional that the plans of the facility meet the standards of construction required by this section. Prior to commencing construction of the facility, the builder shall submit the certification to the Division of Inspection Services.


19. This permit does not excuse the applicant from obtaining any license

which may be needed from the City Clerk's Office.


P. Samuel Hoffses, Chief of Inspection Services

/el 3/16/95

M. Russo Const Job: 12 Sixth street Portland

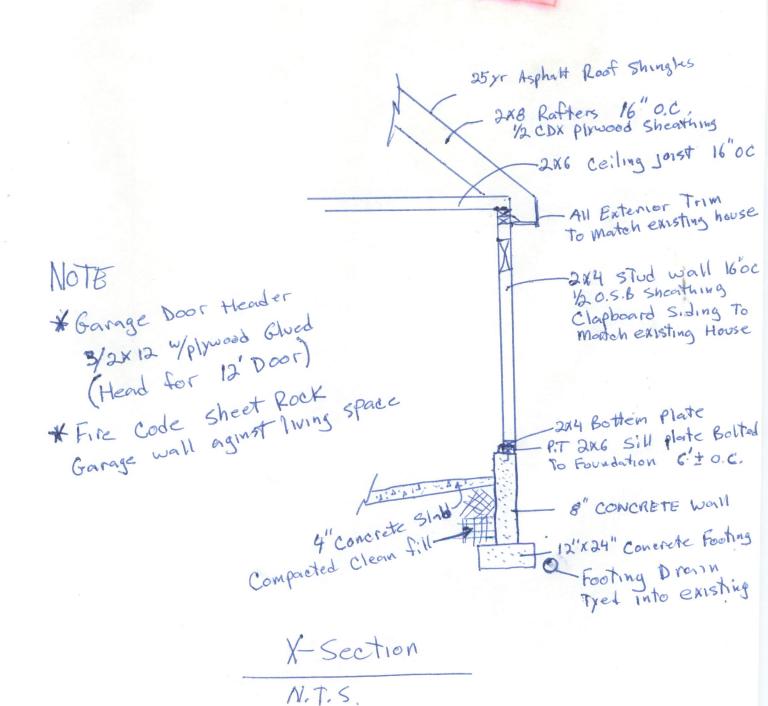


2 of 3

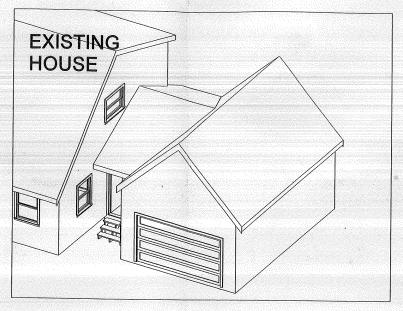

3 - view



FRONT ELEVATION

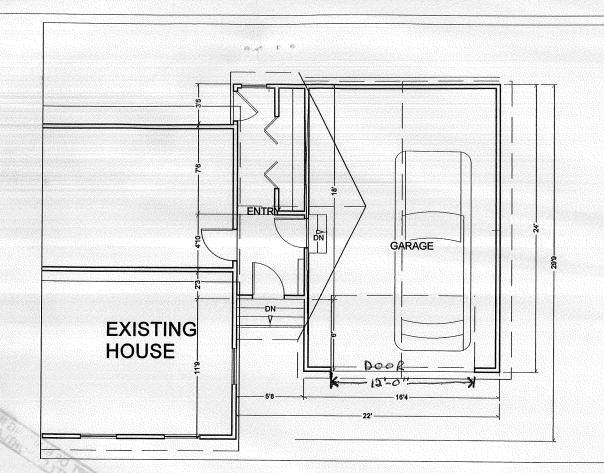

PLAN VIEW 1/8" = 1'0"

M. RUSSO CONSTRUCTION

Beaulieu 12 sixth street