

342-B-1
DISPLAY THIS CARD ON PRINCIPAL FRONTAGE OF WORK

CITY OF PORTLAND

BUILDING INSPECTION

PERMIT

Please Read Application And Notes, If Any, Attached

Permit Number: 342-B-1
PERMIT ISSUED
FEB 18 2009
CITY OF PORTLAND

This is to certify that White Paul G/Paul G. White File Co.

has permission to Renovations

AT 50 Allen Ave

CBL 342 B001001

provided that the person or persons, firm or corporation accepting this permit shall comply with all of the provisions of the Statutes of Maine and of the Ordinances of the City of Portland regulating the construction, maintenance and use of buildings and structures, and of the application on file in this department.

Apply to Public Works for street line and grade if nature of work requires such information.

Notification of inspection must be given and written permission procured before this building or part thereof is latched or otherwise closed-in. 24 HOUR NOTICE IS REQUIRED.

A certificate of occupancy must be procured by owner before this building or part thereof is occupied.

OTHER REQUIRED APPROVALS

Fire Dept. [Signature]

Health Dept. _____

Appeal Board _____

Other _____

Department Name

[Signature]
Director - Building & Inspection Services

PENALTY FOR REMOVING THIS CARD

L & L STRUCTURAL
ENGINEERING SERVICES, INC.
Six Q Street
South Portland, ME 04106

Fax Transmittal

TEL 207 767-4830


To: STEVE M. (P.G. WHITE DW) From: JOE LEASJEG
Fax: 797-0222 Pages: 4
Phone: Date: 4/5/02
Re: AWNING ADDITION CC:

Urgent For Review Please Comment Please Reply Please Recycle

• If you do not receive all pages, please call our business phone for transmission verification.

STEVE, PLEASE NOTE THE VERIFICATION ON THE EXISTING
12" CMU WALL READ,
CALL IF YOU HAVE QUESTIONS

THANK JOE

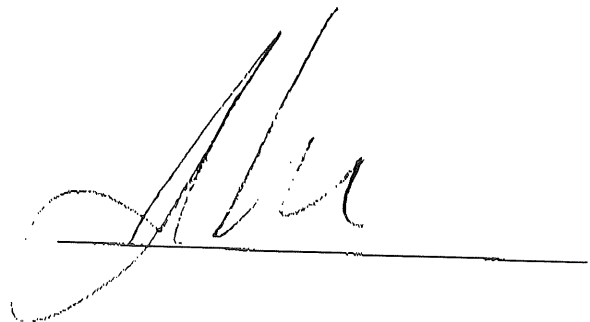

L & L STRUCTURAL
ENGINEERING SERVICES, INC.
Six Q Street
South Portland, ME 04106
Phone: (207) 767-4830
Fax: (207) 799-5432

PAUL G. WHITE TILE CO. INC. AWNING ADDITION

50 ALLEN AVENUE
PORTLAND, MAINE

STRUCTURAL DRAWINGS
GENERAL NOTES

Prepared for: Paul G. White Co. Inc.
50 Allen Avenue
Portland, Me. 04101



Submission Date: April 5, 2002

GENERAL NOTES:

1. The notes on the drawings are not intended to replace specifications.

1. The notes on the drawings are not intended to replace specifications. See specifications for requirements in addition to general notes.
2. Structural drawings shall be used in conjunction with job specifications and architectural, mechanical, electrical, plumbing, and site drawings. Consult these drawings for locations and dimensions of openings, chases, inserts, reglets, sleeves, depressions, and other details not shown on structural drawings.
3. All dimensions and conditions must be verified in the field. Any discrepancies shall be brought to the attention of the engineer before proceeding with the affected part of the work. Do not make plans.
4. The structure is designed to be self supporting and stable after the building is complete. It is the contractor's sole responsibility to determine erection procedures and sequencing to ensure the safety of the building and its components during erection. This includes the addition of necessary shoring, sheathing temporary bracing, guys or tiedowns. Such material shall remain the property of the contractor after completion of the project.
5. Sections and details shown on any structural drawings shall be considered typical for similar conditions.
6. All applicable federal, state, and municipal regulations shall be followed, including the federal department of labor occupational safety and health act.


DESIGN LOADS:

1. Building code: BOCA Basic Building Code (1999)
2. Design Loads shall be in accordance with the building code.
 Roof (snow) Live Load 42 PSF (plus drift as applicable)

TIMBER FRAMING:

1. All timber framing shall be in accordance with the AITC Timber Construction Manual or the National Design Specification (NDS) - Latest editions.
2. Individual timber framing members shall be visually graded, minimum grade #2 Spruce-Pine-Fir (SPF), kiln dried 19% maximum moisture content.
3. All lumber in contact with concrete or masonry shall be pressure treated. Timber shall be southern yellow pine treated with CCA to 0.4 #/CF in accordance with AWPA C-18.
4. Provide solid 2x timber bridging, double nailed at each end, at 8 feet maximum spacing for all dimensional lumber floor framing.
5. Standard metal connectors shall be used at all timber to timber connections or as noted on the design drawings.
6. Nailing not specified shall conform with BOCA appendix C.
7. Provide 19/32" thick APA rated sheathing on roof framing.
8. Provide 15/32" thick APA rated sheathing on exterior wall framing.

designed by: JHL	PAUL G. WHITE TILE CO. INC. 50 ALLEN AVENUE PORTLAND, MAINE GENERAL NOTES	L & L STRUCTURAL ENGINEERING SERVICES, INC. SIX O STREET SOUTH PORTLAND, MAINE 04108 PHONE: (207) 787-4830 FAX: (207) 788-8432 EMAIL: LLEN@AOL.COM	S1
drawn by: JHL			
checked by: MFL			
scale: NOTED			
date: April 5, 2002			

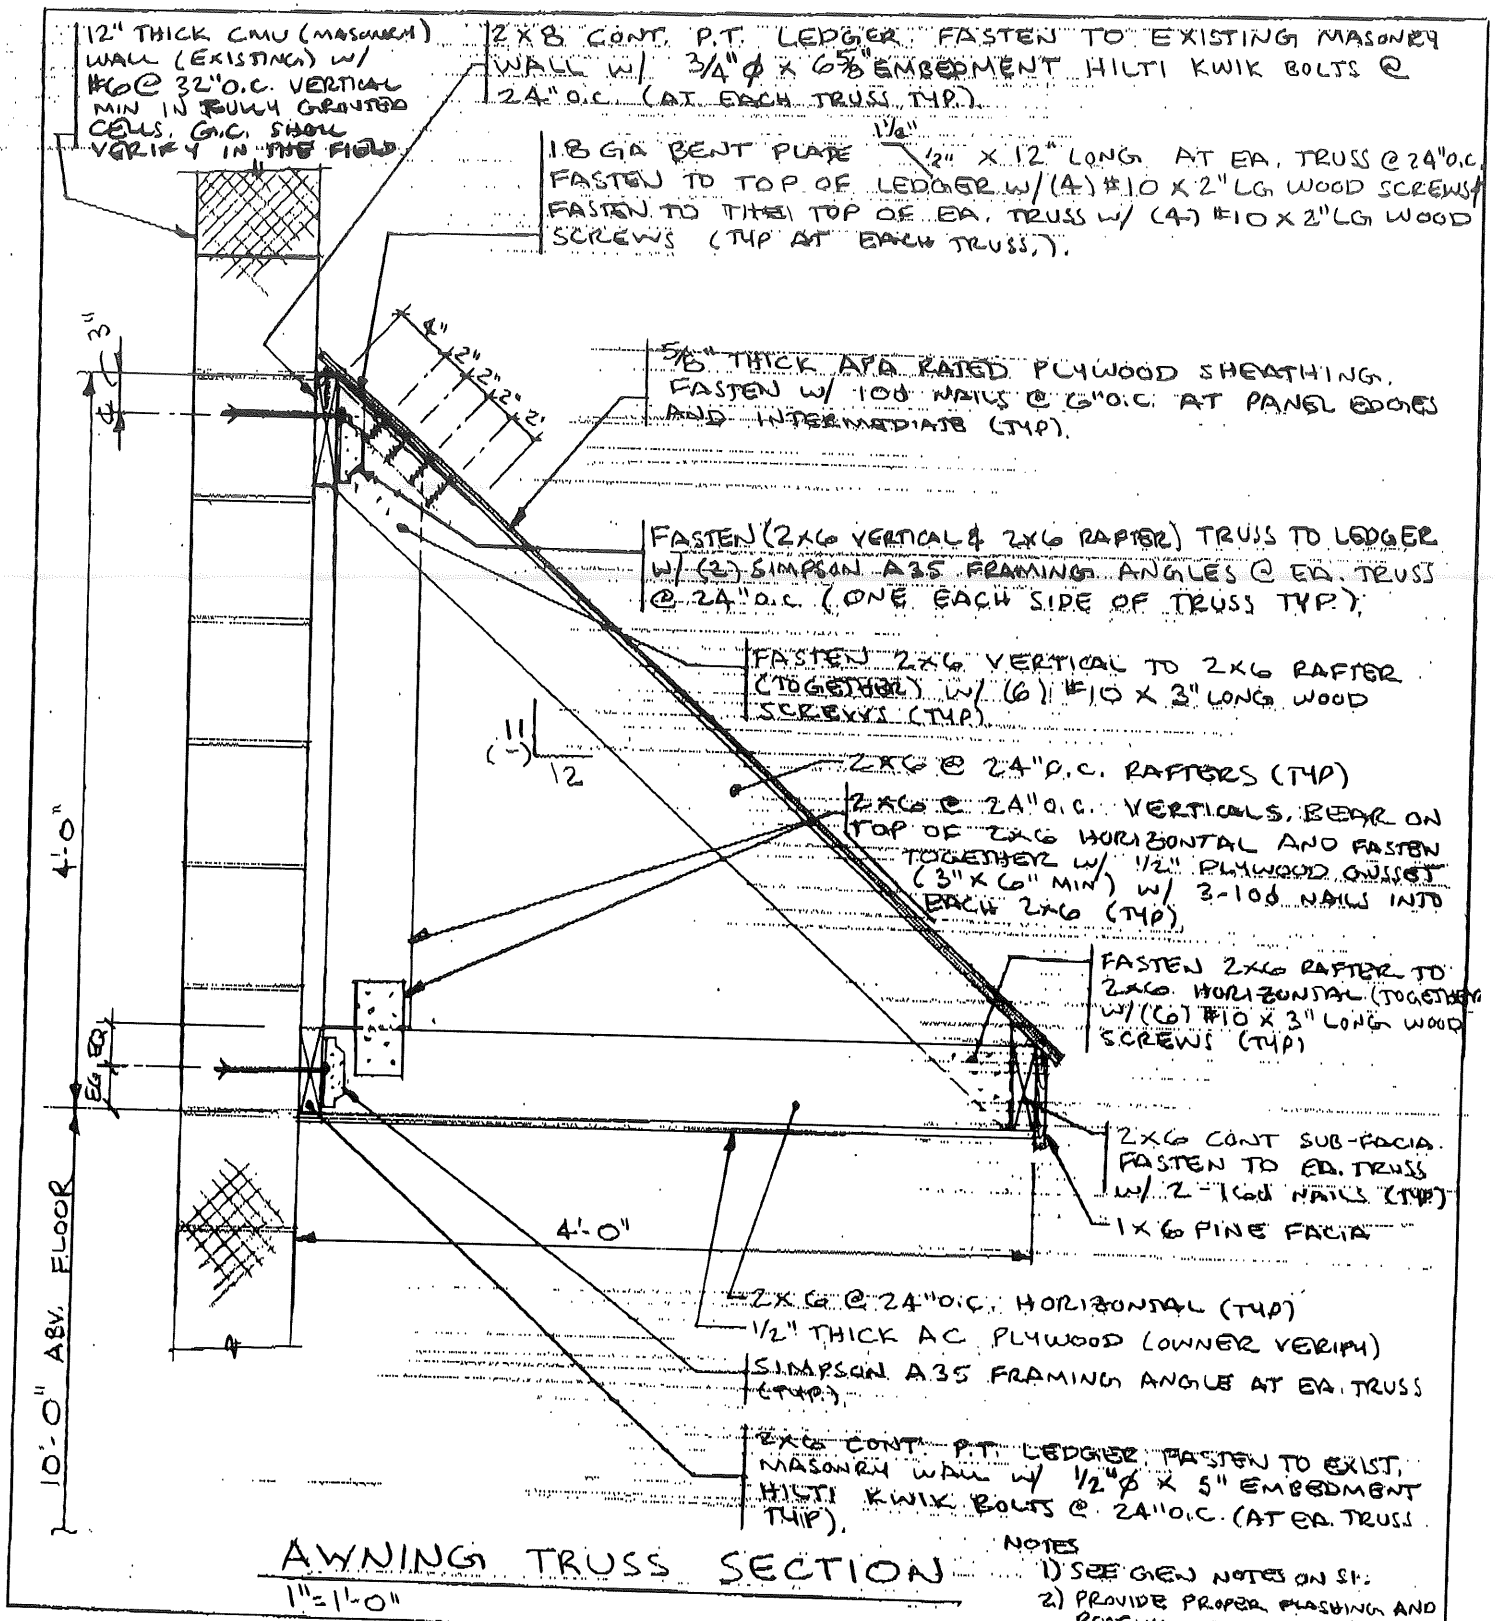

designed by:	JHL
drawn by:	JHL
checked by:	MFL
scale:	NOTED
date:	4/5/02

PAUL G. WHITE TILE CO. INC.
 50 ALLEN AVENUE
 PORTLAND, ME.

AWNING ADDITION
 SECTIONS & DETAILS

L & L STRUCTURAL
 ENGINEERING SERVICES, INC.
 SIX O STREET
 SOUTH PORTLAND, MAINE 04108

PHONE: (207) 787-4830
 FAX: (207) 788-6432
 EMAIL: LLENGO@L.COM