

SECTION 01580PROJECT IDENTIFICATION AND SIGNSPART 1 - GENERAL1.1 DESCRIPTION

## A. Work Included:

1. Provide and erect a sign at the project site to identify the project and to indicate that the Federal and State Governments are participating in the development of the project.
- B. Do not place, or allow the placement of, other advertising sign boards at the project site or along rights-of-way furnished for the project work.

PART 2 - PRODUCTS2.1 MATERIAL AND DESIGN


- A. Construct a sign of 3/4-inch exterior grade, high density overlaid plywood or other material, approved by the Engineer, suitable for signs.

PART 3 - EXECUTION3.1 INSTALLATION

- A. Erect the sign in a prominent location as approved by the Engineer.
- B. Construct the sign in accordance with the following sample Drawing.
- C. Remove the sign when the Work has been completed at no additional cost to the Owner.

## PROJECT SIGN FOR DEP AND SRF CONSTRUCTION PROJECTS

The General Contractor shall provide and erect a project sign as detailed and specified. The location of the sign shall be as directed by the Engineer. No other contractor, subcontractor or material signs will be permitted on the sign. The Contractor shall maintain and keep the project sign in good condition until the work is completed when the sign will be removed. All other signs to be erected on the site shall be approved by the Engineer. Provide adequate supports for sign as site conditions may require and keep sign a proper distance above prevailing grade to permit public viewing.

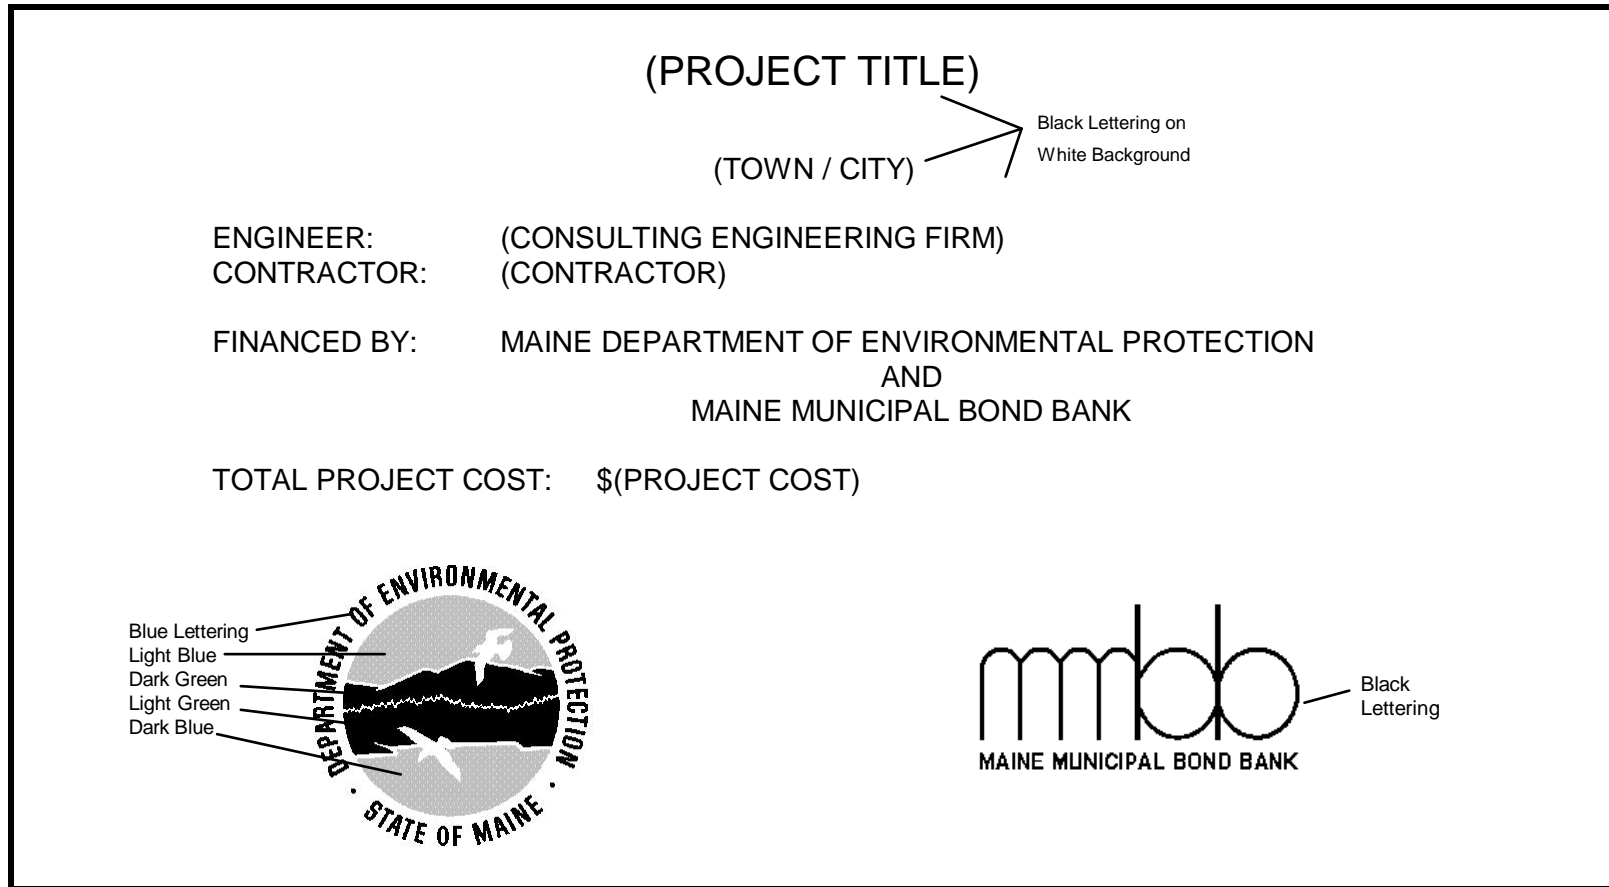

MINIMUM SIGN DIMENSIONS: 1200 x 2400 x 19mm (4' x 8' x 3/4") EXTERIOR PLYWOOD (A - B GRADE)  
MINIMUM LETTERING DIMENSIONS: 2"

END OF SECTION