

Location of Construction: 100 Portland St, Portland, ME 04101		Owner: J. J. J. J.		Phone: 207-874-1234		Permit No: <b>99046 4</b>
Owner Address: 100 Portland St, Portland, ME 04101		Lessee/Buyer's Name:		BusinessName:		
Contractor Name: ABC Builders		Address: 100 Portland St, Portland, ME 04101		Phone: 207-874-1234		<div style="border: 2px solid black; padding: 5px; text-align: center;"> <b>PERMIT ISSUED</b>                  Permit Issued:  <div style="border: 1px solid black; padding: 5px; margin: 5px 0;"> <b>MAY 12 1999</b> </div> <b>CITY OF PORTLAND</b> </div>
Past Use: Retail		Proposed Use: Retail		COST OF WORK: \$ 23,000.00 PERMIT FEE: \$ 445.00 FIRE DEPT. <input checked="" type="checkbox"/> Approved <input type="checkbox"/> Denied INSPECTION: Use Group <b>B-1</b> Type <b>5B</b> Signature: <i>[Signature]</i>		
Proposed Project Description: Interior Renovation of 5300 West Avenue		PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.) Action: Approved <input type="checkbox"/> Approved with Conditions: <input type="checkbox"/> Denied: <input type="checkbox"/> Signature: _____ Date: _____		Zoning Approval: Special Zone or Reviews: <input type="checkbox"/> Shoreland <input type="checkbox"/> Wetland <input type="checkbox"/> Flood Zone <input type="checkbox"/> Subdivision <input type="checkbox"/> Site Plan maj <input type="checkbox"/> minor <input type="checkbox"/> mm <input type="checkbox"/>		
Permit Taken By: S.J.		Date Applied For: May 10, 1999		Zoning Appeal: <input type="checkbox"/> Variance <input type="checkbox"/> Miscellaneous <input type="checkbox"/> Conditional Use <input type="checkbox"/> Interpretation <input type="checkbox"/> Approved <input type="checkbox"/> Denied		

1. This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules.
2. Building permits do not include plumbing, septic or electrical work.
3. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work..

Call for Pickup: Will remove 204-3600

**PERMIT ISSUED WITH REQUIREMENTS**

**CERTIFICATION**

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

SIGNATURE OF APPLICANT \_\_\_\_\_ ADDRESS: \_\_\_\_\_ DATE: \_\_\_\_\_ PHONE: \_\_\_\_\_

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE \_\_\_\_\_ PHONE: \_\_\_\_\_

CEO DISTRICT



COMMENT<sup>o</sup>

4/99 Inspected framing & plumbing work in progress. Test on CK

12-1-99 Checked needs self closer on bathroom door  
Work in progress RW in

12/20/99 checked for final inspection 5 new room - 2 Handicapped accessible - everything in place - smokes OK, alarms OK, rooms finished OK w/ Merland. Jmm  
Back Stairs are new - no handrail / Treads have 7-11 w/ Rosing (economy) guardrail top low (25") must be raised. NO permit or plans submitted - need permit. Jmm  
7/17/00 Contractor filed civil's issue Cert of Occ.

Inspection Record

Type	Date
Foundation: _____	_____
Framing: _____	_____
Plumbing: _____	_____
Final: _____	_____
Other: _____	_____

REVIEWED FOR  
BARRIER FREE  
COMPLIANCE

65-C-1-13

**STATE OF MAINE**  
DEPARTMENT OF PUBLIC SAFETY  
LICENSING AND INSPECTIONS UNIT  
AUGUSTA  
**CONSTRUCTION PERMIT**



Permit N° 09991

PERMISSION IS HEREBY GIVEN TO:

Location of project:

PROJECT TITLE:

Inn @ St. John  
939 Congress St.  
Portland, ME 04101

939 Congress St.  
Portland, ME

Inn @ St. John  
OCCUPANCY CLASSIFICATION:  
Hotel/Motel

To construct or alter the afore referenced building according to the plans hitherto filed with the Commissioner and now approved. No departure from such plans shall be made without prior approval in writing.

This permit will expire at midnight on November 17, 19 99  
This permit is issued under the provisions of Title 25, Chapter 317, Section 2448

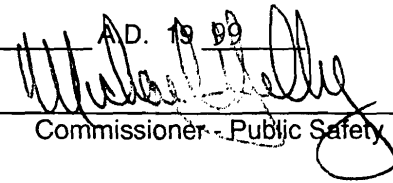
Nothing herein shall excuse the holder of this permit for the failure to comply with local ordinances, zoning laws, or other pertinent legal restrictions.

Dated the 18th day of May

A.D. 19 99

FEE \$ 150/50

SPRINKLED

  
\_\_\_\_\_  
Commissioner - Public Safety

**THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED**

**Building or Use Permit Application  
Attached Single Family Dwellings/Two-Family Dwelling  
Multi-Family or Commercial Structures and Additions Thereto**

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

**NOTE\*\*If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.**

Location/Address of Construction: <del>939</del> 939 CONGRESS ST, PORTLAND ME 04101		
Total Square Footage of Proposed Structure		Square Footage of Lot
Tax Assessor's Chart, Block & Lot Number Chart# 605 Block# C Lot# 1	Owner: INSURE ST. JOHN, CORP	Telephone#: 773 6481
Owner's Address: 939 CONGRESS ST PORTLAND, ME 04102	Lessee/Buyer's Name (If Applicable)	Cost Of Work: \$ 85,200 445
Proposed Project Description:(Please be as specific as possible) INTERIOR RENOVATION OF 1800 SF TO BUILD 5 GUEST ROOMS IN EXISTING STORAGE/MAINTENANCE AREA.		
Contractor's Name, Address & Telephone A S N BUILDERS - 797 2192		WILLIAM NEMMERS 774.3683
Current Use: HOTEL		Proposed Use: HOTEL

Separate permits are required for Internal & External Plumbing, HVAC and Electrical installation.

•All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II.

•All plumbing must be conducted in compliance with the State of Maine Plumbing Code.

•All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III.

•HVAC(Heating, Ventililation and Air Conditioning) installation must comply with the 1993 B.O.C.A. Building Code as amended by Section 6-Art III.

You must Include the following with you application:

- 1) A Copy of Your Deed or Purchase and Sale Agreement
- 2) A Copy of your Construction Contract, if available
- 3) A Plot Plan/Site Plan

Minor or Major site plan review will be required for the above proposed projects. The attached checklist outlines the minimum standards for a site plan.

**4) Building Plans**

Unless exempted by State Law, construction documents must be designed by a registered design professional.

A complete set of construction drawings showing all of the following elements of construction:

- Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)
- Floor Plans & Elevations
- Window and door schedules
- Foundation plans with required drainage and dampproofing
- Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas equipment, HVAC equipment (air handling) or other types of work that may require special review must be included.


**Certification**

I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit.

Signature of applicant: WILLIAM NEMMERS - [Signature]	Date: MAY 6, 1999
-------------------------------------------------------	-------------------

Building Permit Fee: \$25.00 for the 1st \$1000.cost plus \$5.00 per \$1,000.00 construction cost thereafter.

Additional Site review and related fees are attached on a separate addendum



### BUILDING PERMIT REPORT

DATE: 5/11/99 ADDRESS: 939 Congress St CBL: 065-C-101

REASON FOR PERMIT: renovation

BUILDING OWNER: Inno e St John

PERMIT APPLICANT: William Nommers Contractor A & N Builders

USE GROUP R-1 BOCA 1996 CONSTRUCTION TYPE 5A

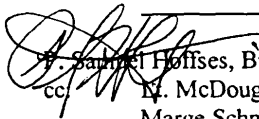

### CONDITION(S) OF APPROVAL

This permit is being issued with the understanding that the following conditions are met:

Approved with the following conditions: \*1, \*19 \*20, \*21, \*22, \*23, \*27, \*29, \*30, \*32, \*33, \*34, \*35

1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection)
3. Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2
4. Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' o.c. between bolts. (Section 2305.17)
5. Waterproofing and damp proofing shall be done in accordance with Section 1813.0 of the building code.
6. Precaution must be taken to protect concrete from freezing. Section 1908.0
7. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
8. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1996)
9. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211
10. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.
11. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2, M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2". (Sections 1021 & 1022.0) - Handrails shall be on both sides of stairway. (Section 1014.7)
12. Headroom in habitable space is a minimum of 7'6". (Section 1204.0)
13. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use Group minimum 11" tread, 7" maximum rise. (Section 1014.0)
14. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4
15. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.6)
16. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)
17. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) (Section 710.0)

18. The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)
19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 &19. (Smoke detectors shall be installed and maintained at the following locations):
- In the immediate vicinity of bedrooms
  - In all bedrooms
  - In each story within a dwelling unit, including basements
- In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2.
20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
21. The Fire Alarm System shall maintained to NFPA #72 Standard.
22. The Sprinkler System shall maintained to NFPA #13 Standard.
23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1996)
24. Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
26. Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics).
- X 27. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. **No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done.**
28. All requirements must be met before a final Certificate of Occupancy is issued.
- X 29. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building Code/1996).
- X 30. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical Code/1993). (Chapter M-16)
31. Please read and implement the attached Land Use Zoning report requirements.
- X 32. Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.
- X 33. Glass and glazing shall meet the requirements of Chapter 24 of the building code.
- X 34. All Interior Finishes shall be done in accordance with Chapter 8 of The City's Building Code (The BOCA National Building Code/1996) -
- X 35. Sound Transmission Control shall be done in accordance with Section 1214.0 of The building code,
- 36.

 Samuel Hoffses, Building Inspector  
 cc N. McDougall, PFD  
 Marge Schmuckal, Zoning Administrator  
 PSH 12-14-98 

\*\*On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.



WILLIAM NEMMERS ASSOCIATES ARCHITECTS  
424 FORE ST. PORTLAND, ME 04101 774-3683.

---

May 6, 1999

Marge Schmuckle, Inspections Department  
City of Portland  
389 Congress Street  
Portland, Maine 04101

Re: The Inn at St. John  
939 Congress Street  
Portland, Maine

Dear Marge:

With this letter I am submitting plans for a building permit for Interior Renovations-Phase #1 for a portion of the Inn at St. John. This is the first of several improvement steps the Inn is planning over the next few years, the pace of the improvements will be determined by the economic situation of the Inn.

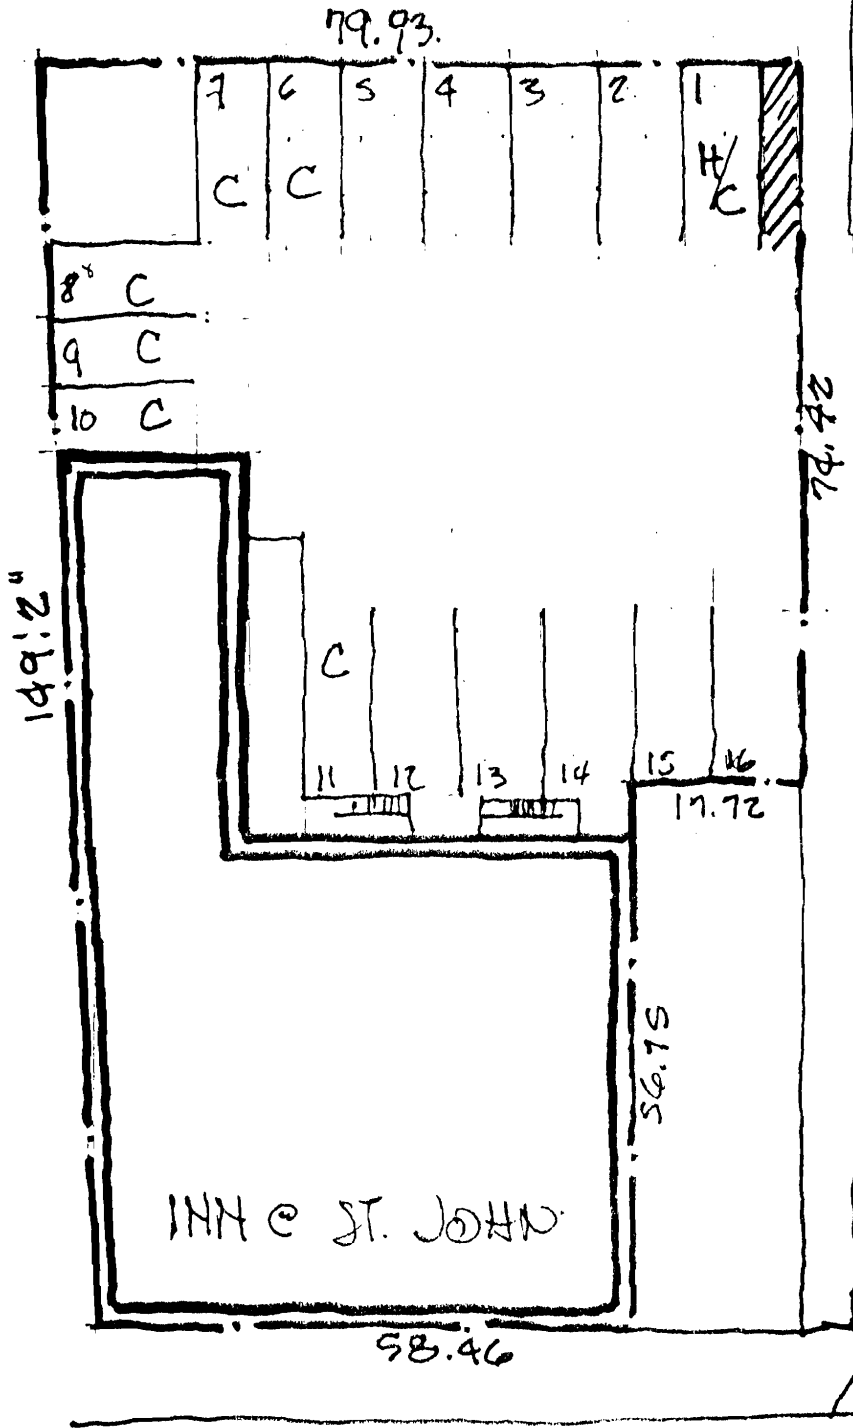
This Phase #1 work will transform a first floor space now used for storage and workshop, into several quest rooms with the added benefit of adding handicap accessibility to the Hotel, as two of the rooms (#5 and #6) and the associated bath rooms are designed to be accessible. Two other suites (#2 and #3) are equipped for hearing impaired guests.

The plans have been reviewed by the State Fire Marshall's Office for Life-Safety and Handicap (ADA and Maine Human Rights) issues and is awaiting their final letter of approval.

Sincerely,

A handwritten signature in black ink, appearing to read 'William Nemmers', written in a cursive style.

William Nemmers



16

CONGRESS

32 rooms  
 exist  
 + 5 New  
 37 - 4 = 33  
 SPACES  
 Reg

INN @ ST. JOHN.  
 EXISTING SITE PLAN 5.99

16 SPC  
 shown

11.20