

Project: TrueChoice Federal Credit Union
Date Prepared: June 10, 2013

Structural Statement of Special Inspections

Project: *TrueChoice Federal Credit Union*
Location: *Park Street, Portland, ME*
Owner: *Truechoice Federal Credit Union*

This *Statement of Special Inspections* encompass the following discipline: **Structural**

This *Statement of Special Inspections* is submitted as a condition for permit issuance in accordance with the Special Inspection and Structural Testing requirements of the Building Code. It includes a schedule of Special Inspection services applicable to this project as well as the name of the Structural Special Inspection Coordinator (SSIC) and the identity of other approved agencies to be retained for conducting these inspections and tests.

The Structural Special Inspection Coordinator shall keep records of all Structural inspections and shall furnish inspection reports to the Building Code Official (BCO) and the Structural Registered Design Professional in Responsible Charge (SRDP). Discovered discrepancies shall be brought to the immediate attention of the Contractor for correction. If such discrepancies are not corrected, the discrepancies shall be brought to the attention of the Building Official and the Structural Registered Design Professional in Responsible Charge. The Special Inspection program does not relieve the Contractor of his or her responsibilities.

Interim reports shall be submitted to the Building Official and the Structural Registered Design Professional in Responsible Charge at an interval determined by the SSIC and the BCO.

A *Final Report of Special Inspections* documenting completion of all required Special Inspections, testing and correction of any discrepancies noted in the inspections shall be submitted to the BCO prior to issuance of a Certificate of Use and Occupancy.

Job site safety and means and methods of construction are solely the responsibility of the Contractor.


Interim Report Frequency: Upon request of Building Official _____ or per attached schedule.

Prepared by:

William P. Faucher, P.E., LEED AP, RRC
(type or print name of the Structural Registered Design Professional in Responsible Charge)

Signature

June 10, 2013
Date

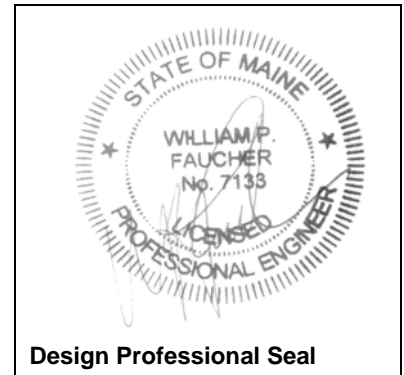

Owner's Authorization:

Building Code Official's Acceptance:

Signature

Date

Signature

Date

Project: TrueChoice Federal Credit Union
Date Prepared: June 10, 2013

Structural Statement of Special Inspections (Continued)

List of Agents

Project: *TrueChoice Federal Credit Union*
 Location: *Park Street, Portland, ME*
 Owner: *Truechoice Federal Credit Union*

This Statement of Special Inspections encompass the following discipline: **Structural**

(Note: Statement of Special Inspections for other disciplines may be included under a separate cover)

This Statement of Special Inspections / Quality Assurance Plan include the following building systems:

- Soils and Foundations
- Cast-in-Place Concrete
- Precast Concrete System
- Masonry Systems
- Structural Steel
- Wood Construction
- Special Cases

Special Inspection Agencies	Firm	Address, Telephone, e-mail
Engineer of Record (EOR)	Allied Engineering, Inc.	160 Veranda St. Portland, ME 04103 T - 207.221.2260 x107 F - 207.221.2266 wfaucher@allied-eng.com
1. STRUCTURAL Special Inspections Coordinator (SSIC)		
2. Special Inspector (SI 1)		
3. Special Inspector (SI 2)		
4. Testing Agency (TA 1)		
5. Testing Agency (TA 2)		

Note: The inspectors and testing agencies shall be engaged by the Owner or the Owner's Agent, and not by the Contractor or Subcontractor whose work is to be inspected or tested. Any conflict of interest must be disclosed to the Building Official, prior to commencing work.

Project: TrueChoice Federal Credit Union
Date Prepared: June 10, 2013

Structural Statement of Special Inspections (Continued)

Final Report of Special Inspections (SSIC/SI 1)

[To be completed by the Structural Special Inspections Coordinator (SSIC/SI 1). Note that all Agent's Final Reports must be received prior to issuance.]

Project: *TrueChoice Federal Credit Union*
Location: *Park Street, Portland, ME*
Owner: *Truechoice Federal Credit Union*

Architect of Record: *Brian Curley, RA* *PDT Architects, Portland, ME*
(name) (firm)

Structural Registered Design
Professional in Responsible Charge: *William P. Faucher, P.E., LEED AP, RRC* *Allied Engineering, Inc.*
(name) (firm)

To the best of my information, knowledge and belief, the Special Inspections required for this project, and itemized in the *Statement of Special Inspections* submitted for permit, have been performed and all discovered discrepancies have been reported and resolved.

Interim reports submitted prior to this final report form a basis for and are to be considered an integral part of this final report.

Respectfully submitted,
Structural Special Inspection Coordinator

(Type or print name)

(Firm Name)

Signature Date



Licensed Professional Seal

Project: TrueChoice Federal Credit Union
Date Prepared: June 10, 2013

Structural Statement of Special Inspections (Continued)

Special Inspector's/Agent's Final Report

Project: *TrueChoice Federal Credit Union*
Park Street, Portland, ME

Owner: *TrueChoice Federal Credit Union*

(firm)

Special Inspector or Agent: *William P. Faucher, P.E.*
Allied Engineering, Inc.
Designation: *Engineer of Record*

To the best of my information, knowledge and belief, the Special Inspections or testing required for this project, and designated for this Inspector/Agent in the *Statement of Special Inspections* submitted for permit, have been performed and all discovered discrepancies have been reported and resolved.

Interim reports submitted prior to this final report form a basis for and are to be considered an integral part of this final report.

Respectfully submitted,
Special Inspector or Agent:

(Type or print name)

Signature

Date

***Licensed Professional Seal or
Certification Number***

Structural Schedule of Special Inspections

Qualifications of Inspectors and Testing Technicians

The qualifications of all personnel performing Special Inspection and testing activities are subject to the approval of the Building Official. The credentials of all Inspectors and testing technicians shall be provided to the Special Inspector for their records. *NOTE VERIFICATION THAT QUALIFIED INDIVIDUALS ARE AVAILABLE TO PERFORM STIPULATED TESTING AND/OR INSPECTION SHOULD BE PROVIDED PRIOR TO SUBMITTING STATEMENT. AGENT QUALIFICATIONS IN SCHEDULE ARE SUGGESTIONS ONLY; FINAL QUALIFICATIONS ARE SUBJECT TO THE DISCRETION OF THE REGISTERED DESIGN PROFESSIONAL PREPARING THE SCHEDULE.*

Key for Minimum Qualifications of Inspection Agents:

When the Registered Design Professional in Responsible Charge or Special Inspector of Record deems it appropriate that the individual performing a stipulated test or inspection have a specific certification, license or experience as indicated below, such requirement shall be listed below and shall be clearly identified within the schedule under the Agent Qualification Designation.

PE/SE	Structural Engineer – a licensed SE or PE specializing in the design of building structures
PE/GE	Geotechnical Engineer – a licensed PE specializing in soil mechanics and foundations
EIT	Engineer-In-Training – a graduate engineer who has passed the Fundamentals of Engineering examination

Experienced Testing Technician

ETT	Experienced Testing Technician – An Experienced Testing Technician with a minimum 5 years experience with the stipulated test or inspection
-----	---

American Concrete Institute (ACI) Certification

ACI-CFTT	Concrete Field Testing Technician – Grade 1
ACI-CCI	Concrete Construction Inspector
ACI-LTT	Laboratory Testing Technician – Grade 1&2
ACI-STT	Strength Testing Technician

American Welding Society (AWS) Certification

AWS-CWI	Certified Welding Inspector
AWS/AISC-SSI	Certified Structural Steel Inspector

American Society of Non-Destructive Testing (ASNT) Certification

ASNT	Non-Destructive Testing Technician – Level II or III.
------	---

International Code Council (ICC) Certification

ICC-SMSI	Structural Masonry Special Inspector
ICC-SWSI	Structural Steel and Welding Special Inspector
ICC-SFSI	Spray-Applied Fireproofing Special Inspector
ICC-PCSI	Prestressed Concrete Special Inspector
ICC-RCSI	Reinforced Concrete Special Inspector

National Institute for Certification in Engineering Technologies (NICET)

NICET-CT	Concrete Technician – Levels I, II, III & IV
NICET-ST	Soils Technician - Levels I, II, III & IV
NICET-GET	Geotechnical Engineering Technician - Levels I, II, III & IV

Other

Project: TrueChoice Federal Credit Union

Date Prepared: June 10, 2013

Structural Schedule of Special Inspections

SOILS & FOUNDATION CONSTRUCTION

VERIFICATION AND INSPECTION	Y/N	EXTENT: CONTINUOUS, PERIODIC, SUBMITTAL, OR NONE	COMMENTS	AGENT	AGENT QUALIFICATION	TASK COMPLETED
IBC Section 1704.7, 1704.8, 1704.9						
1. Verify existing soil conditions, fill placement and load bearing requirements	Y					
a. Prior to placement of prepared fill, determine that the site has been prepared in accordance with the approved soils report.	Y	P	IBC 1704.7.1		PE/GE, EIT or ETT	
b. During placement and compaction of fill material, verify material being used and maximum lift thickness comply with the approved soils report.	Y	P	IBC 1704.7.2		PE/GE, EIT or ETT	
c. Test in-place dry density of compacted fill complies with the approved soils report.	Y	P	IBC 1704.7.2		PE/GE, EIT or ETT	
2. Pile foundations:	N					
a. Observe and record procedures for static load testing of piles.	N	C	IBC 1704.8		PE/GE, EIT or ETT	
b. Observe and record procedures for dynamic load testing of piles.	N	C			PE/GE, EIT or ETT	
c. Record installation of each pile and results of load test. Include cutoff and tip elevations of each pile relative to permanent reference.	N	C			PE/GE, EIT or ETT	
d. Test welded splices of steel piles	N	C	AWS D1.1		AWS-CWI	
3. Pier foundations: Verify installation of pier foundations for buildings assigned to Seismic Design Category C, D, E or F.	N	C	IBC 1704.9		PE/GE, EIT or ETT	
a. Verify pier diameter and length	N	C			PE/GE, EIT or ETT	
b. Verify pier embedment (socket) into bedrock	N	P			PE/GE, EIT or ETT	
c. Verify suitability of end bearing strata	N	P			PE/GE, EIT or ETT	

Structural Schedule of Special Inspections

CONCRETE CONSTRUCTION

VERIFICATION AND INSPECTION	Y/N	EXTENT: CONTINUOUS, PERIODIC, SUBMITTAL, OR NONE	COMMENTS	AGENT	AGENT QUALIFICATION	TASK COMPLETED
IBC Section 1704.4						
1. Inspection of reinforcing steel, including prestressing tendons, and placement	Y	P	ACI 318: 3.5, 7.1-7.7		PE/SE or EIT	
2. Inspection of reinforcing steel welding in accordance with Table 1704.3, Item 5B	N		Welding of Reinf Not Allowed		AWS-CWI	
3. Inspect bolts to be installed in concrete prior to and during placement of concrete where allowable loads have been increased	Y	C	IBC 1912.5		PE/SE or EIT	
4. Verifying use of required design mix	Y	P	ACI 318: Ch 4, 5.2-5.4		PE/SE or EIT	
5. At time fresh concrete is sampled to fabricate specimens for strength test, perform slump and air content test and temperature	Y	C	ASTM C 172 ASTM C 31 ACI 318: 5.6, 5.8		ACI-CFTT or ACI-STT	
6. Inspection of concrete and shotcrete placement for proper application techniques	Y	C	ACI 318: 5.9, 5.10		PE/SE or EIT	
7. Inspection for maintenance of specified curing temperature and techniques	Y	P	ACI 318: 5.11-5.13		PE/SE or EIT	
8. Inspection of Prestressed Concrete	N					
a. Application of prestressing force.	N	C	ACI 318: 18.20		PE/SE or EIT	
b. Grouting of bonded prestressing tendons in seismic force resisting system	N	C	ACI 318: 18.18.4		PE/SE or EIT	
9. Erection of precast concrete members	N	P	ACI 318: Ch 16		PE/SE or EIT	
10. Verification of in-situ concrete strength, prior to stressing of tendons in post-tensioned concrete and prior to removal of shores and forms beams and structural slabs	N	P	ACI 318: 6.2		ACI-STT	

Structural Schedule of Special Inspections - STEEL CONSTRUCTION

VERIFICATION AND INSPECTION	Y/N	EXTENT: CONTINUOUS, PERIODIC, SUBMITTAL, OR NONE	COMMENTS	AGENT	AGENT QUALIFICATION	TASK COMPLETED
IBC Section 1704.3						
1. Material verification of high-strength bolts, nuts and washers:	Y					
a. Identification markings to conform to ASTM standards specified in the approved construction documents.	Y	S	Applicable ASTM material specifications; AISC 335, Section A3.4; AISC LRFD, Section A3.3		PE/SE or EIT	
b. Manufacturer's certificate of compliance required.	Y	S			PE/SE or EIT	
2. Inspection of high-strength bolting	Y					
a. Bearing-type connections.	Y	P	AISC LRFD Section M2.5 IBC Sect 1704.3.3		AWS/AISC-SSI	
b. Slip-critical connections.	Y	C or P (method dependent)			AWS/AISC-SSI	
3. Material verification of structural steel (IBC Sect 1708.4):	Y					
a. Identification markings to conform to ASTM standards specified in the approved construction documents.	Y	S	ASTM A 6 or ASTM A 568 IBC Sect 1708.4		PE/SE or EIT	
b. Manufacturers' certified mill test reports.	Y	S	ASTM A 6 or ASTM A 568 IBC Sect 1708.4		PE/SE or EIT	
4. Material verification of weld filler materials:	Y					
a. Identification markings to conform to AWS specification in the approved construction documents.	Y	S	AISC, ASD, Section A3.6; AISC LRFD, Section A3.5		PE/SE or EIT	
b. Manufacturer's certificate of compliance required.	Y	S			PE/SE or EIT	
5. Submit current AWS D1.1 welder certificate for all field welders who will be welding on this project.	Y	S	AWS D1.1		PE/SE or EIT	
6. Inspection of welding (IBC 1704.3.1):	Y					
a. Structural steel:						
1) Complete and partial penetration groove welds.	Y	C	AWS D1.1		AWS-CWI	
2) Multipass fillet welds.	Y	C			AWS-CWI	
3) Single-pass fillet welds > 5/16"	Y	C			AWS-CWI	
4) Single-pass fillet welds < 5/16"	Y	P			AWS-CWI	
5) Floor and deck welds.	Y	P	AWS D1.3		AWS-CWI	
b. Reinforcing steel (IBC Sect 1903.5.2):						
1) Verification of weldability of reinforcing steel other than ASTM A706.	Y	C				
2) Reinforcing steel-resisting flexural and axial forces in intermediate and special moment frames, and boundary elements of special reinforced concrete shear walls and shear reinforcement.	Y	C	AWS D1.4 ACI 318: 3.5.2		AWS-CWI	
3) Shear reinforcement.	Y	C			AWS-CWI	
4) Other reinforcing steel.	Y	P			AWS-CWI	
7. Inspection of steel frame joint details for compliance (IBC Sect 1704.3.2) with approved construction documents:	Y					
a. Details such as bracing and stiffening.	Y	P			PE/SE or EIT	
b. Member locations.	Y	P			PE/SE or EIT	
c. Application of joint details at each connection.	Y	P			PE/SE or EIT	

Structural Schedule of Special Inspection Services
FABRICATION AND IMPLEMENTATION PROCEDURES – STRUCTURAL STEEL

VERIFICATION AND INSPECTION IBC Section 1704.2	Y/N	EXTENT: CONTINUOUS, PERIODIC, SUBMITTAL, OR NONE	COMMENTS	AGENT	AGENT QUALIFICATION	TASK COMPLETED
1. Fabrications Procedures: Review of fabricator's written procedural and quality control manuals and periodic auditing of fabrication practices by an approved special inspection agency. At the completion of fabrication, the approved fabricator shall submit a certificate of compliance to the building code official stating that the work was performed in accordance with the approved construction documents. -OR- 2. AISC Certification	Y	S	Fabricator shall submit one of the two qualifications		PE/SE or EIT	
3. At completion of fabrication, the approved fabricator shall submit a certificate of compliance to the building code official stating that the work was performed in accordance with the approved construction documents.	Y	S	IBC 1704.2.2		PE/SE or EIT	

Structural Schedule of Special Inspection Services

FABRICATION AND IMPLEMENTATION PROCEDURES – WOOD TRUSSES – NOT APPLICABLE

VERIFICATION AND INSPECTION IBC Section 1704.2	Y/N	EXTENT: CONTINUOUS, PERIODIC, SUBMITTAL, OR NONE	COMMENTS	AGENT	AGENT QUALIFICATION	TASK COMPLETED
1. Fabrications Procedures: Review of fabricator's written procedural and quality control manuals and periodic auditing of fabrication practices by an approved special inspection agency. At the completion of fabrication, the approved fabricator shall submit a certificate of compliance to the building code official stating that the work was performed in accordance with the approved construction documents. -OR- 2. TPI Inspection Program: Fabricator shall participate in the TPI Quality Assurance Inspection Program, and maintain a copy of the Quality Assurance Procedures Manual, QAP-90. Submit copy of certificate. All trusses shall bear the TPI Registered Mark.	N	S	Fabricator shall submit one of the two qualifications		PE/SE or EIT	
3. At completion of fabrication, the approved fabricator shall submit a certificate of compliance to the building code official stating that the work was performed in accordance with the approved construction documents	N	S	IBC 1704.2.2		PE/SE or EIT	

**Structural Schedule of Special Inspections -
 WOOD CONSTRUCTION**

VERIFICATION AND INSPECTION IBC Section 1704.6	Y/N	EXTENT: CONTINUOUS, PERIODIC, SUBMITTAL, OR NONE	COMMENTS	AGENT	AGENT QUALIFICATION	TASK COMPLETED
1. Fabrication of high-load diaphragms	N					
a. Verify wood structural panel sheathing for grade and thickness		P	IBC 1704.6		PE/SE or EIT	
b. Verify the nominal size of framing members at adjoining panel edges		P	IBC 1704.6		PE/SE or EIT	
b. Verify the nail or staple diameter and length		P	IBC 1704.6		PE/SE or EIT	
b. Verify the number of fastener lines		P	IBC 1704.6		PE/SE or EIT	
b. Verify the spacing between fasteners in each line and at edge margins		P	IBC 1704.6		PE/SE or EIT	
2. Load Tests for Joist Hangers: Provide evidence of manufacturer's load test in accordance with ASTM D1761 including the vertical load bearing capacity, torsional moment capacity, and deflection characteristics when there is no calculated procedure recognized by the code.	Y	S	IBC 1715 [submit ICBO reports]		PE/SE or EIT	

Structural Schedule of Special Inspections
SEISMIC RESISTANCE - STRUCTURAL

VERIFICATION AND INSPECTION	Y/N	EXTENT: CONTINUOUS, PERIODIC, SUBMITTAL, OR NONE	COMMENTS	AGENT	AGENT QUALIFICATION	TASK COMPLETE D
IBC Section 1707						
1. Special inspections for seismic resistance. Special inspection as specified in this section is required for the following:	N		Seismic Design Category: B			
a. The seismic-force-resisting systems in structures assigned to Seismic Design Category C, D, E or F	N	P	IBC 1707.1		PE/SE or EIT	
2. Structural steel: Continuous special inspection for structural welding in accordance with AISC 341.	Y	P	IBC 1702.2		AWS-CWI	
3. Structural wood:	N					
a. Continuous special inspection during field gluing operations of elements of the seismic-force-resisting system.		C	IBC 1702.3		PE/SE or EIT	
b. Periodic special inspections for nailing, bolting, anchoring and other fastening of components within the seismic-force-resisting system, including drag struts, braces and hold-downs		P	IBC 1702.3		PE/SE or EIT	
4. Cold-formed steel framing: Periodic special inspections during welding operations of elements of the seismic-force-resisting system. Periodic special inspections for screw attachment, bolting, anchoring and other fastening of components within the seismic-force-resisting system, including struts, braces, and hold-downs	N	P				
4. Seismic isolation system. Provide periodic special inspection during the fabrication and installation of isolator units and energy dissipation devices if used as part of the seismic isolation system	N	N	IBC 1707.8			

Quality Assurance Plan – Seismic and Wind

QUALITY ASSURANCE FOR SEISMIC RESISTANCE CHECK LIST [IBC 1705]

Seismic Design Category B

FOR SEISMIC DESIGN CATEGORY C OR HIGHER:

Structural:

The seismic-force-resisting systems

Steel Braced Frames and associated connections/anchorage

Steel Moment Frames and associated connections

Shear walls: CMU Wood Concrete Diaphragms: Floor Roof

Other:

QUALITY ASSURANCE FOR WIND RESISTANCE CHECK LIST [IBC 1706]

Wind Exposure Category B

REQUIRED	NOT REQUIRED	NOT APPLICABLE	QUALITY ASSURANCE PLAN REQUIREMENTS (A Quality Assurance Plan is required where indicated below)
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	In wind exposure Categories A and B, where the 3-second-gust basic wind speed is 120 miles per hour (mph) (52.8 <i>m/sec</i>) or greater.
<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	In wind exposure Categories C and D, where the 3-second-gust basic wind speed is 110 mph (49 <i>m/sec</i>) or greater.

Prepared by:

Building Code Official's Acceptance:

William P. Faucher, P.E., LEED AP, RRC June 6, 2013

Signature

Date

Signature

Date

Contractor's Statement of Responsibility

Each contractor responsible for the construction or fabrication of a system or component designated in the Quality Assurance Plan must submit a Statement of Responsibility. The Statement of Responsibility is required for Seismic Design Category C or higher. Make additional copies of this form as required.

Project:

TrueChoice Federal Credit Union
Parl Street, Portland, ME

Contractor's Name:

Address:

License No.:

Description of designated building systems and components included in the Statement of Responsibility:

Contractor's Acknowledgment of Special Requirements

I hereby acknowledge that I have received, read, and understand the Quality Assurance Plan and Special Inspection program.

I hereby acknowledge that control will be exercised to obtain conformance with the construction documents approved by the Building Official.

Signature

Date

Contractor's Provisions for Quality Control

Procedures for exercising control within the contractor's organization, the method and frequency of reporting and the distribution of reports is attached to this Statement.

Identification and qualifications of the person(s) exercising such control and their position(s) in the organization are attached to this Statement.