

City of Portland, Maine – Building or Use Permit Application 389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716

Location of Construction: ***1344 Washington Ave., Portland 04103		Owner: *** Teri Leasure		Phone: 797-88661		Permit No: 090126	
Owner Address:		Lessee/Buyer's Name:		Phone:		BusinessName:	
Contractor Name: David Leasure		Address:		Phone: 797-8661		Permit Issued: FEB 22 1	
Past Use: Commercial / Office		Proposed Use: Commercial / Office		COST OF WORK: \$ (15sf)		PERMIT FEE: \$33.00	
				FIRE DEPT. <input type="checkbox"/> Approved <input type="checkbox"/> Denied		INSPECTION: <i>Signage</i> Use Group: Type: <i>BOCA99</i>	
Proposed Project Description: New Freestanding Sign				Signature:		Signature: <i>[Signature]</i>	
				PEDESTRIAN ACTIVITIES DISTRICT (P.A.D.)		Zoning Appeal: <i>R-P</i> CBL: 344-C-004	
				Action: <input type="checkbox"/> Approved <input type="checkbox"/> Approved with Conditions <input type="checkbox"/> Denied		Zoning Approval: <i>[Signature]</i> 2/16/01 Special Zone or Reviews: <input type="checkbox"/> Shoreland <input type="checkbox"/> Wetland <input type="checkbox"/> Flood Zone <input type="checkbox"/> Subdivision <input type="checkbox"/> Site Plan maj <input type="checkbox"/> minor <input type="checkbox"/> mm <input type="checkbox"/>	
Permit Taken By: Gayle		Date Applied For: February 13, 2001 gg		Signature:		Date:	

1. This permit application does not preclude the Applicant(s) from meeting applicable State and Federal rules.
2. Building permits do not include plumbing, septic or electrical work.
3. Building permits are void if work is not started within six (6) months of the date of issuance. False information may invalidate a building permit and stop all work..

PERMIT ISSUED WITH REQUIREMENTS

CERTIFICATION

I hereby certify that I am the owner of record of the named property, or that the proposed work is authorized by the owner of record and that I have been authorized by the owner to make this application as his authorized agent and I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in the application is issued, I certify that the code official's authorized representative shall have the authority to enter all areas covered by such permit at any reasonable hour to enforce the provisions of the code(s) applicable to such permit

February 15, 2001

SIGNATURE OF APPLICANT _____ ADDRESS: _____ DATE: _____ PHONE: _____

RESPONSIBLE PERSON IN CHARGE OF WORK, TITLE _____ PHONE: _____

White-Permit Desk Green-Assessor's Canary-D.P.W. Pink-Public File Ivory Card-Inspector

Zoning Appeal

Variance
 Miscellaneous
 Conditional Use
 Interpretation
 Approved
 Denied

Historic Preservation
 Not in District or Landmark
 Does Not Require Review
 Requires Review

Action:

Approved
 Approved with Conditions
 Denied

Date: _____

PERMIT ISSUED WITH REQUIREMENTS

2

CEO DISTRICT

SIGNAGE PRE-APPLICATION

PLEASE ANSWER ALL QUESTIONS

R-P

ADDRESS: 1344 WASHINGTON AVENUE ZONE: BP

OWNER: DAVID D. LEASURE

APPLICANT: DAVID P. LEASURE

ASSESSOR NO. _____

SINGLE TENANT LOT? YES _____ NO K

MULTI TENANT LOT? YES K NO _____

(APT OVER OFFICE)

FREESTANDING SIGN? YES K NO _____

DIMENSIONS 3' x 5' = 15'

(ex. pole sign. . .)

MORE THAN ONE SIGN? YES _____ NO K DIMENSIONS _____

BLDG. WALL SIGN? YES _____ NO K DIMENSIONS _____

(attached to bldg)

MORE THAN ONE SIGN? YES _____ NO _____ DIMENSIONS _____

LIST ALL EXISTING SIGNAGE AND THEIR DIMENSIONS: NO OTHER SIGNAGE

LOT FRONTAGE (FEET): 60 FT WASH AVE, 100 FT. MAPLEWOOD ST.

BLDG FRONTAGE (FEET): 22 FT.

AWNING YES _____ NO _____ IS AWNING BACKLIT? YES _____ NO _____

HEIGHT OF AWNING: N/A

IS THERE ANY COMMUNICATION, MESSAGE, TRADEMARK OR SYMBOL ON IT? _____

*** TENANT BLDG. FRONTAGE (IN FEET) N/A
*** **REQUIRED INFORMATION**

AREA FOR COMPUTATION

R-P Zone

Free Standing signs only

Area: 30' MAX allowed = 15'
Height: 8' MAX allowed = 6.5' shown
setback: 5' min = well over 5'

showing outside of the 25' corner triangle

A SITE SKETCH AND BUILDING SKETCH SHOWING EXACTLY WHERE EXISTING AND NEW SIGNAGE IS LOCATED MUST BE PROVIDED. SKETCHES AND/OR PICTURES OF PROPOSED ARE ALSO REQUIRED.

SIGNATURE OF APPLICANT: [Signature]


DATE: 1/10/01

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED


Sign Permit Pre-Application
Attached Single Family Dwellings/Two-Family Dwelling
Multi-Family or Commercial Structures and Additions Thereto

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on ANY PROPERTY within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Address of Construction (include Portion of Building): FREESTANDING SIGN - 1344 WASHINGTON AVE		
Total Square Footage of Proposed Structure 3' x 5'	Square Footage of Lot 6000 S.F.	
Tax Assessor's Chart, Block & Lot Number Chart# 344 Block# C Lot# 004	Owner: TERI LEASURE DAVID LEASURE	Telephone#: (207) 797-8661
Owner's Address: * 1344 WASHINGTON AVE. PORTLAND, ME. 04103	Lessee/Buyer's Name (If Applicable) N/A	Total Sq. Ft. of Sign Fee 155 S.F. \$ 33.00
Proposed Project Description: (Please be as specific as possible) NEW FREESTANDING SIGN		
Contractor's Name, Address & Telephone * DAVID LEASURE 777-8661		Rec'd By 2/13 Gay
Current Use: PROF OFFICE/APT.	Proposed Use: SAME	
Signature of applicant: 	Date: 1/10/01	

Signage Permit Fee: \$30.00 plus .20 per square foot of signage

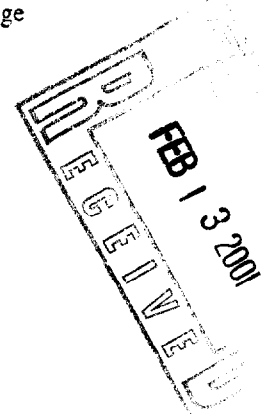

BUILDING PERMIT REPORT

DATE: 15 February 2001 ADDRESS: 1344 Washington Ave. CBL: 344-C-084

REASON FOR PERMIT: New Free Standing Sign.

BUILDING OWNER: Teri Leasure

PERMIT APPLICANT: _____ / CONTRACTOR David Leasure.

USE GROUP: _____ CONSTRUCTION TYPE: _____ CONSTRUCTION COST: _____ PERMIT FEES: \$3300

The City's Adopted Building Code (The BOCA National Building Code/1999 with City Amendments)
The City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993)


CONDITION(S) OF APPROVAL

This permit is being issued with the understanding that the following conditions shall be met: *1 *36

1. This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.
2. Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection) "**ALL LOT LINES SHALL BE CLEARLY MARKED BEFORE CALLING.**"
3. Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2
4. Foundations anchors shall be a minimum of 1/2" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' O.C. between bolts. Section 2305.17
5. Waterproofing and dampproofing shall be done in accordance with Section 1813.0 of the building code.
6. Precaution must be taken to protect concrete and masonry. Concrete Sections 1908.9-19.8.10/ Masonry Sections 2111.3-2111.4.
7. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the proper setbacks are maintained.
8. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1999)
9. All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Code/1993). Chapter 12 & NFPA 211
10. Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code.
11. Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42". In occupancies in Use Group A, B, H-4, I-1, I-2, M, R, public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. Handrails shall be a minimum of 34" but not more than 38". Exception: Handrails that form part of a guard shall have a height not less than 36 inches (914 mm) and not more than 42 inches (1067 mm). Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2". (Sections 1021 & 1022.0). Handrails shall be on both sides of stairway. (Section 1014.7)
12. Headroom in habitable space is a minimum of 7'6". (Section 1204.0)
13. Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 3/4" maximum rise. All other Use Group minimum 11" tread, 7" maximum rise. (Section 1014.0)
14. The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4
15. Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1010.4)
16. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)
17. All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closure's. (Over 3 stories in height requirements for fire rating is two (2) hours. (Section 710.0)
18. The boiler shall be protected by enclosing with (1) hour fire rated construction including fire doors and ceiling, or by providing automatic extinguishment. (Table 302.1.1)

2/15

19. All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1999), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
 - In the immediate vicinity of bedrooms
 - In all bedrooms
 - In each story within a dwelling unit, including basements
20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)
21. The Fire Alarm System shall be installed and maintained to NFPA #72 Standard.
22. The Sprinkler System shall be installed and maintained to NFPA #13 Standard.
23. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1999)
24. Section 25 - 135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".
25. The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services.
26. Ventilation and access shall meet the requirements of Chapter 12 Sections 1210.0 and 1211.0 of the City's Building Code. (Crawl spaces & attics).
27. All electrical, plumbing and HVAC permits must be obtained by Master Licensed holders of their trade. No closing in of walls until all electrical (min. 72 hours notice) and plumbing inspections have been done.
28. All requirements must be met before a final Certificate of Occupancy is issued.
29. All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (The BOCA National Building Code/1996).
30. Ventilation of spaces within a building shall be done in accordance with the City's Mechanical code (The BOCA National Mechanical Code/1993). (Chapter M-16)
31. Please read and implement the attached Land Use Zoning report requirements.
32. Boring, cutting and notching shall be done in accordance with Sections 2305.3, 2305.3.1, 2305.4.4 and 2305.5.1 of the City's Building Code.
33. Bridging shall comply with Section 2305.16.
34. Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0)
35. All flashing shall comply with Section 1406.3.10.
- *36. All signage shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999).


 P. Samuel Hoffses, Building Inspector
 Cc: Lt. McDougall, PFD
 Marge Schmuckal, Zoning Administrator
 Michael Nugent, Inspection Service Manager

PSH 10/1/00

****This permit is herewith issued, on the basis of plans submitted and conditions placed on these plans, any deviations shall require a separate approval.**

*****THIS PERMIT HAS BEEN ISSUED WITH THE UNDERSTANDING THAT ALL THE CONDITIONS OF THE APPROVAL SHALL BE COMPLETED. THEREFORE, BEFORE THE WORK IS COMPLETED A REVISED PLAN OR STATEMENT FROM THE PERMIT HOLDER SHALL BE SUBMITTED TO THIS OFFICE SHOWING OR EXPLAINING THAT THE CONDITIONS HAVE BEEN MET. IF THIS REQUIREMENT IS NOT RECEIVED YOUR CERTIFICATE OF OCCUPANCY SHALL BE WITHHELD. (You Shall Call for Inspections)**

******ALL PLANS THAT REQUIRE A PROFESSIONAL DESIGNER'S SEAL, (AS PER SECTION 114.0 OF THE BUILDING CODE) SHALL ALSO BE PRESENTED TO THIS DIVISION ON AUTO CAD LT. 2000, DXF FORMAT OR EQUIVALENT.**

*******CERTIFICATE OF OCCUPANCY FEE \$50.00**


Low Wattage Security



Applications

The rugged Bandit provides a money-saving alternative to traditional incandescent and quartz lighting units. A durable die-cast aluminum housing and sealed optics make Bandit perfect for landscape, sign, facade and security lighting.

Dimensions

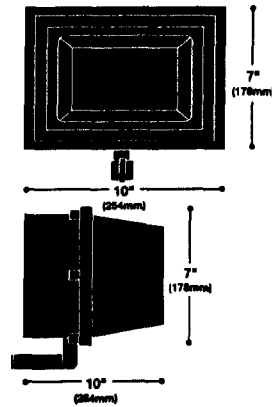

Ordering Information

Catalog Number Logic


Lamp Type	Mounting	Product Family	Lens Type	Lamp Wattage/Base	Voltage	Option
HP=HPS MH=Met. Hal.	B=Knuckle T=Trunnion	F=Bandit	GL=Glass	35=35W/Medium 50=50W/Medium 70=70W/Medium 100=100W/Medium 150=150W/Medium 175=175W/Medium	H-DT=High Power Factor Dual-Tap H-MT=High Power Factor Multi-Tap 120=120 Volt 208=208 Volt 240=240 Volt 277=277 Volt 347=347 Volt 480=480 Volt MT=Multi-Tap TT=Tri-Tap	LL=Lamp MED-LL=Lamp

Note: See Options and Accessories at the end of the Low Wattage Security Section.

Catalog Number	Lamp Wattage	Lamp Type	Net. Wt. (Lbs.)	Std. Volt
HPBF-GL-35-120V-LL	35	HPS	8	1/2
HPBF-GL-50-120V-LL	50	HPS	8	0.5
HPBF-GL-70-120V-LL	70	HPS	9	
HPBF-GL-100-120V-LL	100	HPS	9	
HPBF-GL-150-120V-LL	150	HPS	10	
MHBF-GL-70H-DT-MED-LL	70	MH	16	
MHBF-GL-100H-MT-MED-LL	100	MH	16	
MHBF-GL-175H-MT-MED-LL	175	MH	16	

¹ Ballasts are Normal Power Factor Reactor type for 120 Volt input. High Power Factor Dual-Tap ballasts for 120/277 Volt—Multi-Tap ballasts are 120/208/240/277 Tri-Tap ballast are 120/277/347 Volt.
² Standard lamp is medium base. Lamp is included with HPS and MH units.

LOW WATTAGE SECURITY

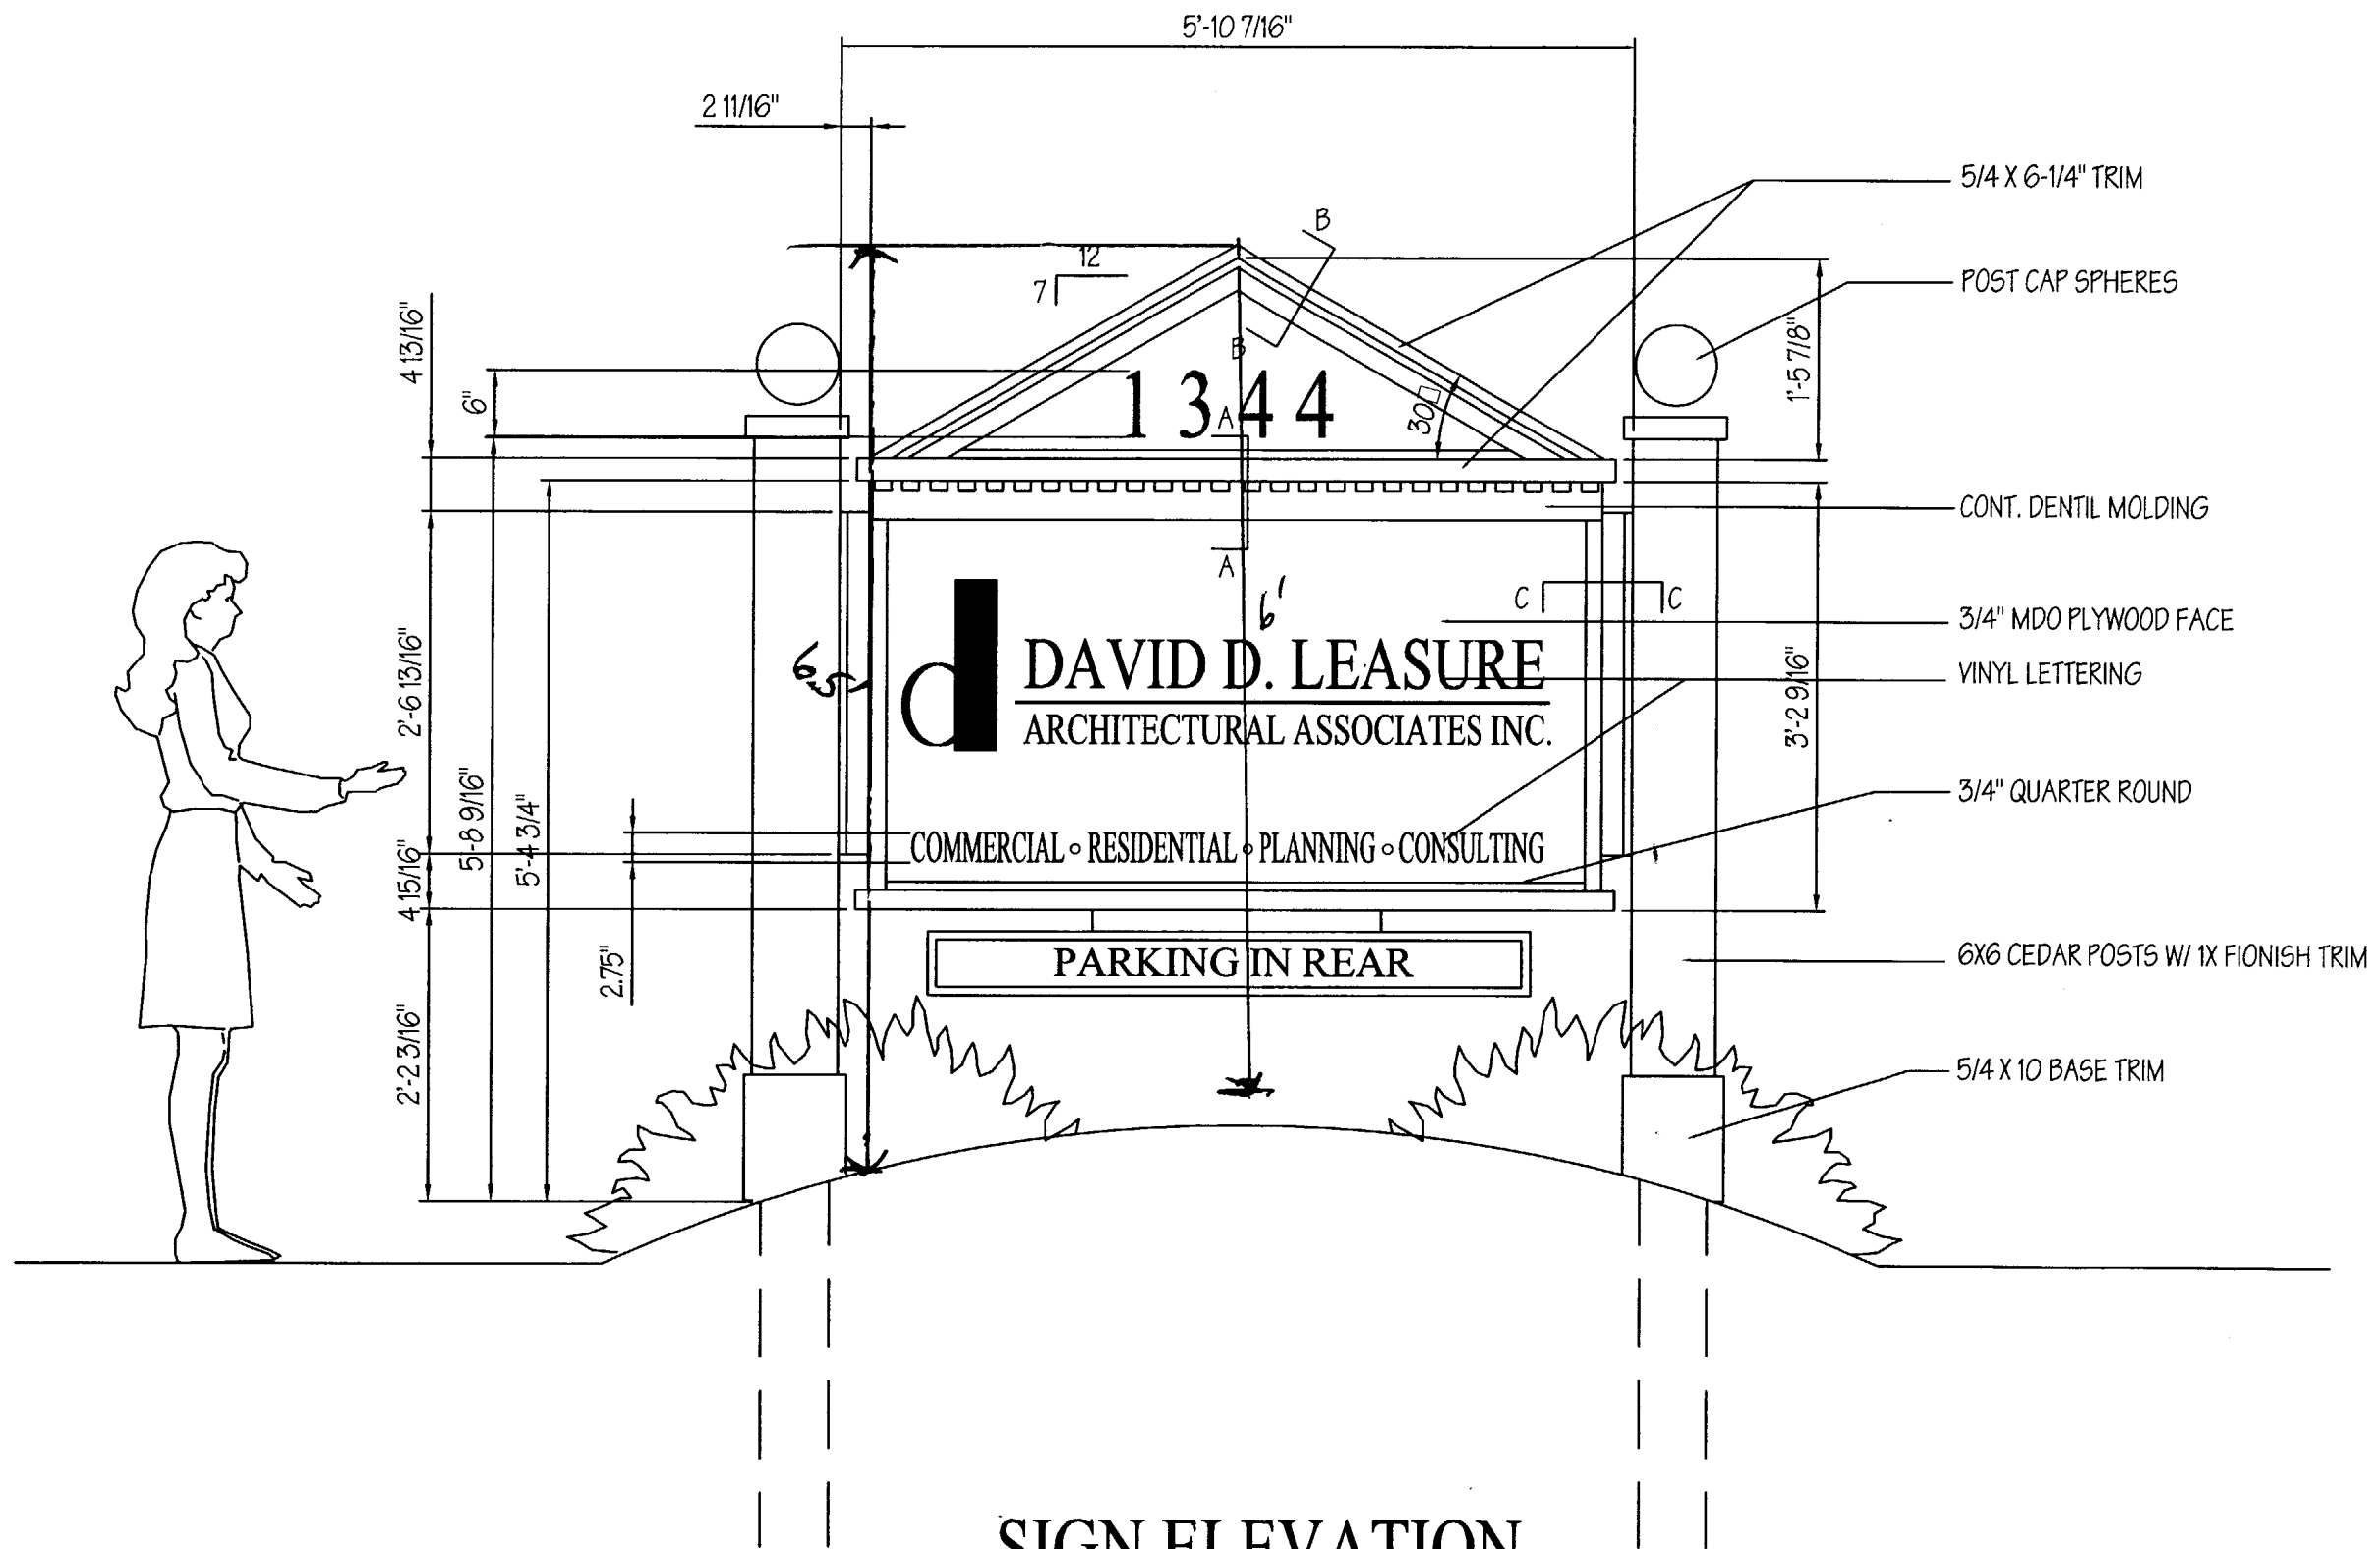

SIGN ELEVATION

3/4" = 1'-0"



DATE	DESCRIPTION
MARCH 2, 2000	PRELIMINARY PLAN
MARCH 22, 2000	REVISED PLAN
MARCH 22, 2000	REVISED PLAN
MARCH 22, 2000	REVISED PLAN
MARCH 22, 2000	REVISED PLAN
MARCH 22, 2000	REVISED PLAN
MARCH 22, 2000	REVISED PLAN
MARCH 22, 2000	REVISED PLAN
MARCH 22, 2000	REVISED PLAN


DAVID D. LEASURE - ARCHITECTURAL ASSOCIATES INC.
 14 SUNSET ROAD FALMOUTH, MAINE
 PROJECT NO. 991204 PROJECT TITLE: SCHEMATIC SITE PLAN
 SCALE: 1" = 5'-0" SHEET TITLE: SCHEMATIC SITE PLAN
 PH (207) 797-8661



REL. FOR CONSTRUCTION - APRIL 20, 2000
 NOT FOR CONSTRUCTION

PROF. OFFICER/RENTAL UNIT RENOVATION
 1344 WASHINGTON AVENUE
 PORTLAND, MAINE

C-200R

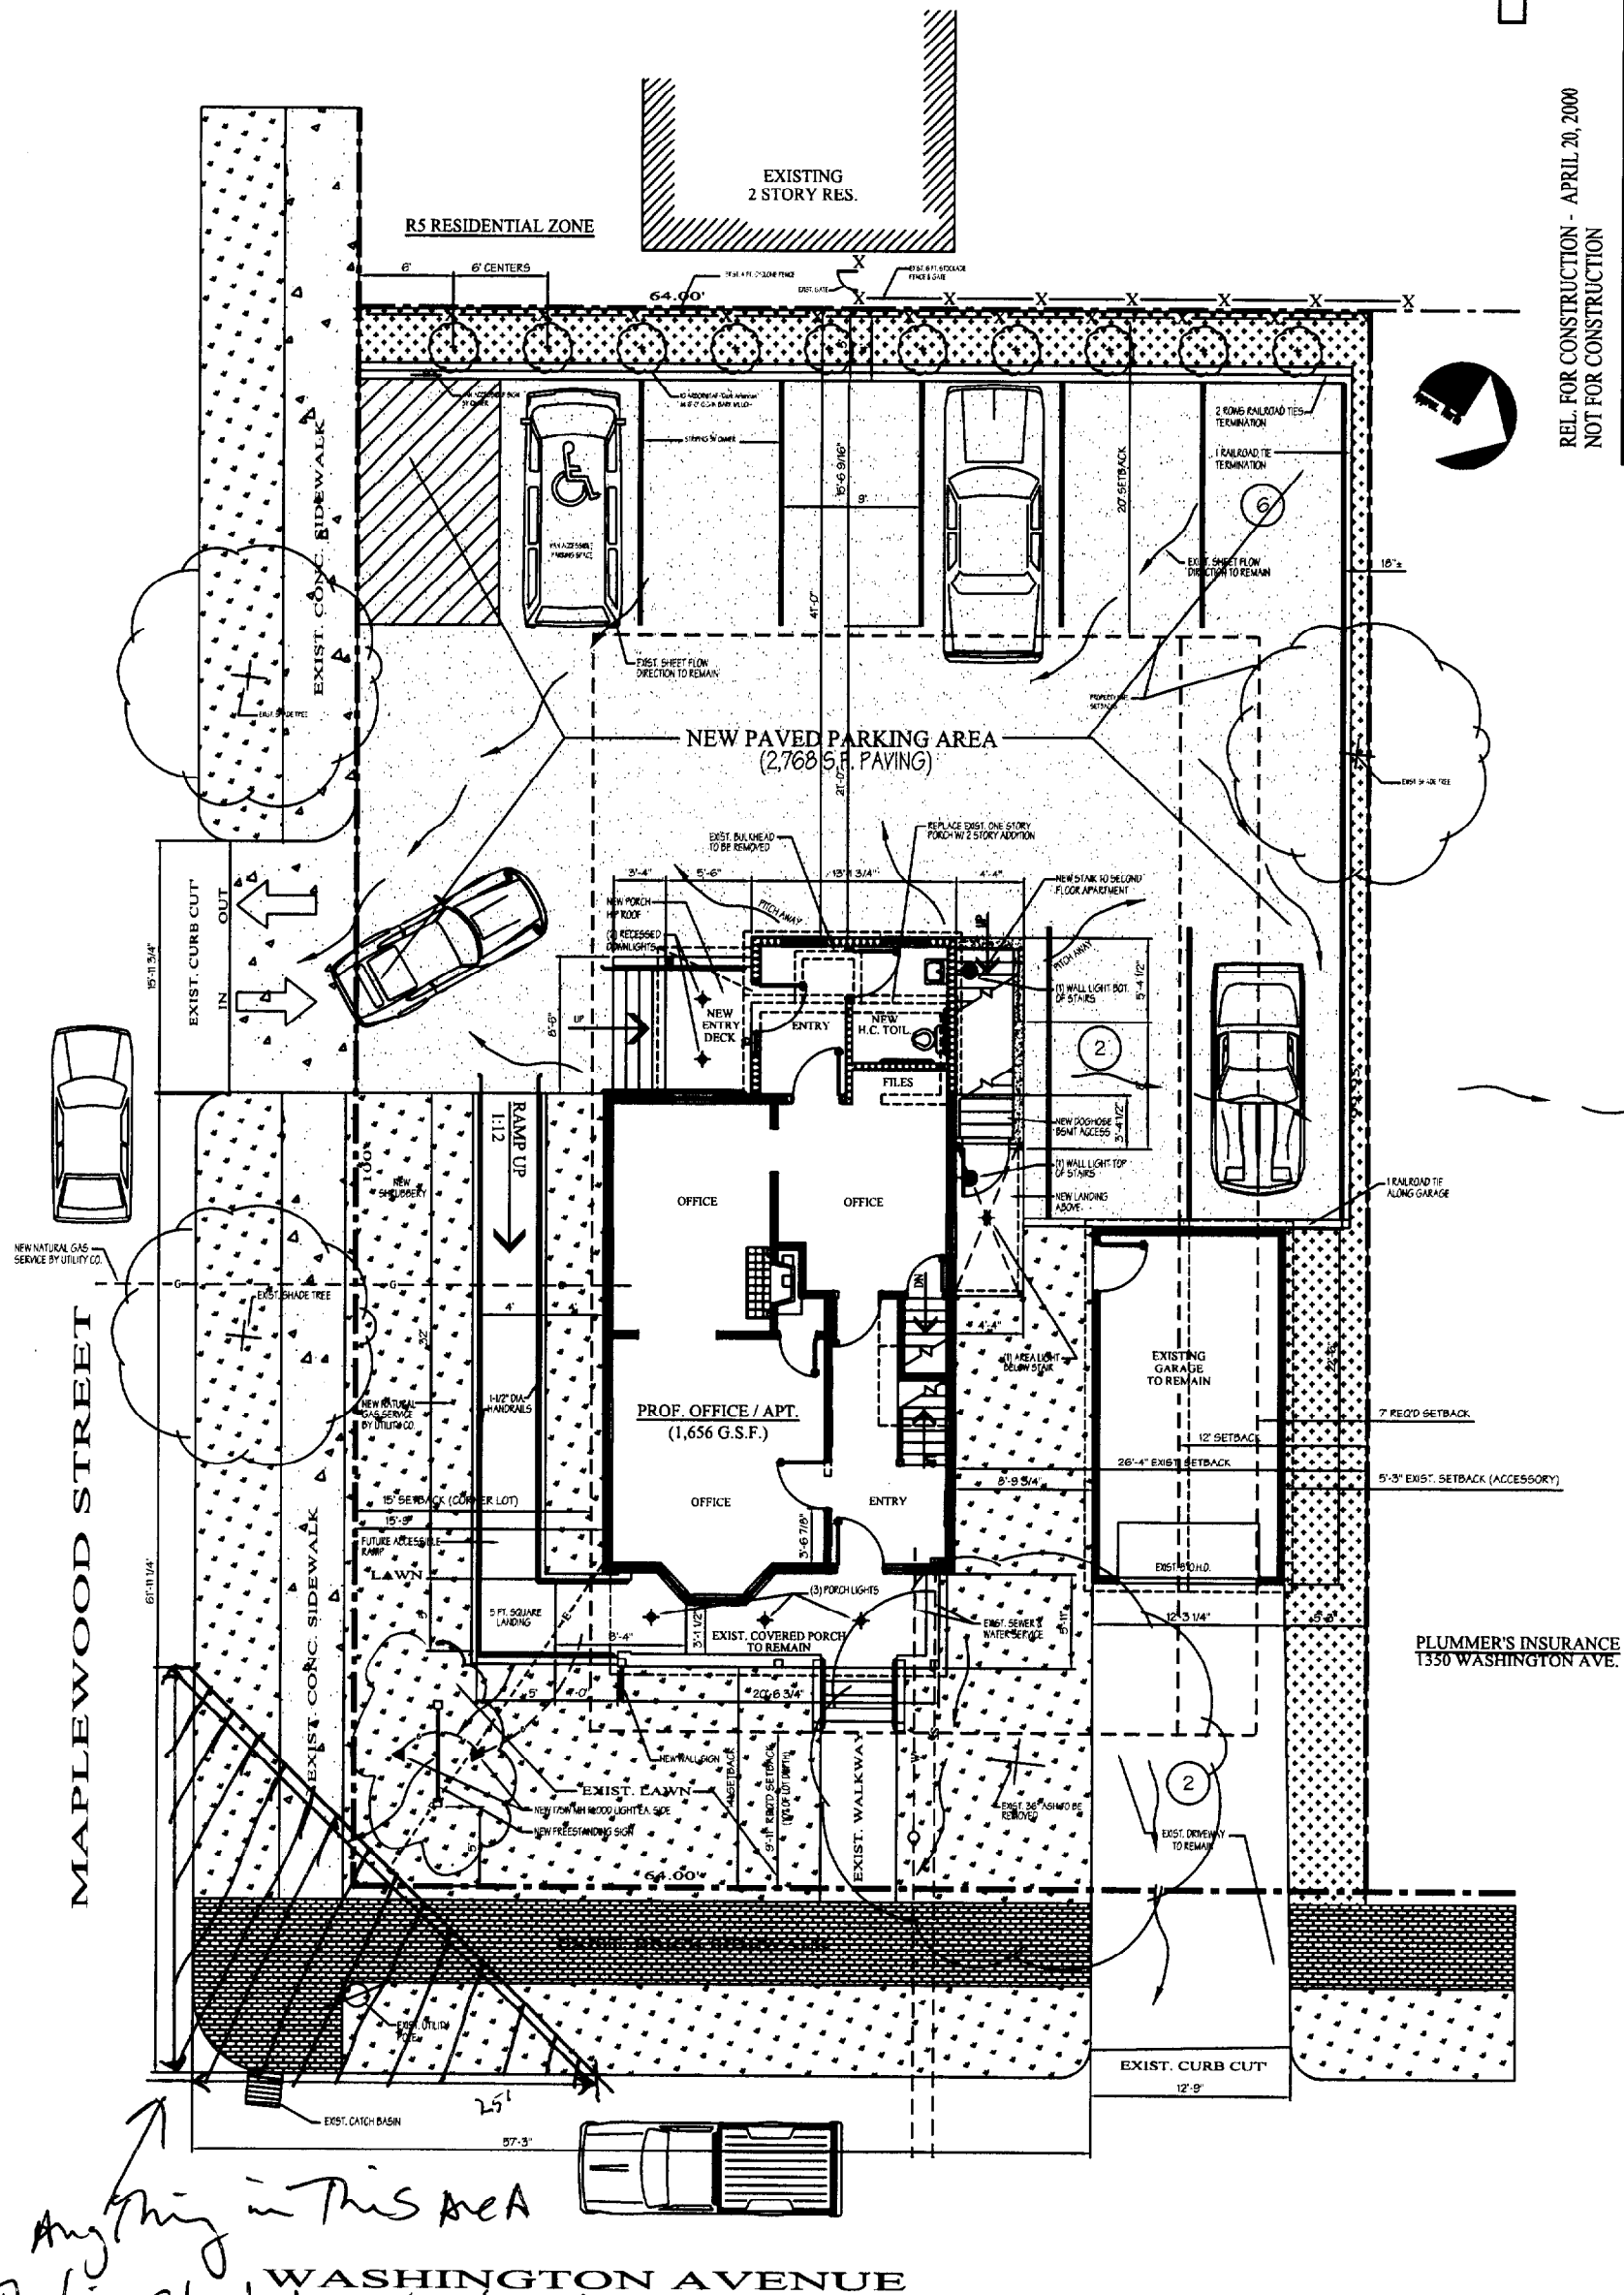

SCHEMATIC SITE PLAN
 1" = 5'-0"

PLUMMER'S INSURANCE
 1350 WASHINGTON AVE.

Anything in this area
 That is shaded, shall not
 be higher than 3 1/2' - shows sign well outside
 this area