



Notes	1	2016	H/O	Submitted for City Review
Date	02/03			
By	H/O			
Drawn By	H/O			
Checked	SB			
Scale	AS NOTED			
Date	06/27/16			

ALL RIGHTS RESERVED. NO PART OF THESE DRAWINGS OR SPECIFICATIONS MAY BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. THESE DRAWINGS INDICATE DESIGN INTENT AND FINISHES.

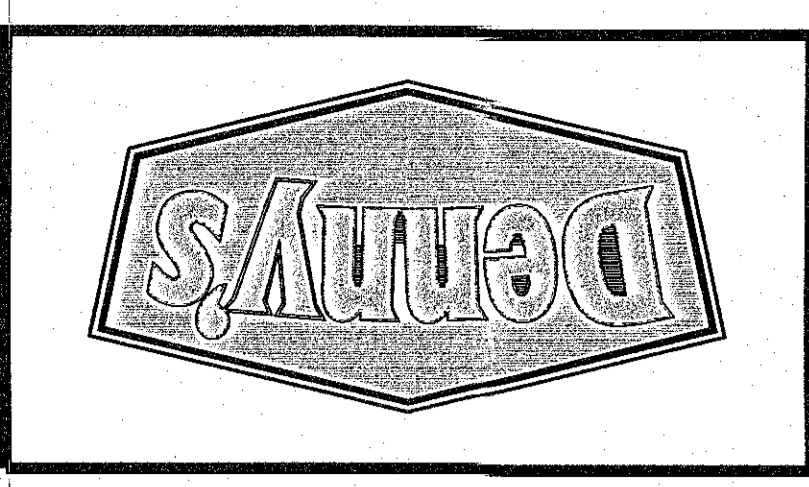

TECHNICAL GROUP, INC.
 2716 HILLS TECH DR #6
 FARMINGTON, CT 06031
 (248) 426-8000
 FAX (248) 426-7004

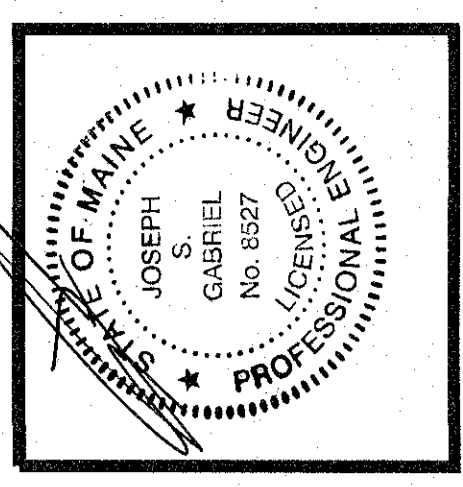

PROJECT	DENNY'S RESTAURANT 1097-1101 CONGRESS ST PORTLAND, ME 04102
SHEET TITLE	MILLWORK DETAILS
JOB #	TG-16414
SHEET	A-2

- GENERAL NOTES**
- SEE AND EXISTING CONDITIONS OF BAR COUNTERS MAY CHANGE BASED ON UNUSUAL SITE CONDITIONS OR FOR ARCHITECTURE. THESE DRAWINGS INDICATE DESIGN INTENT AND FINISHES.
- KEYED NOTES**
- 01 COUNTER TOP TO BE SS-1 WITH FRONT BULLNOSE EDGE. FOLLOW MANUFACTURER'S RECOMMENDATIONS FOR BUILT-UP EDGE DETAILS.
 - 02 1/4" THERMOFLEX GLASS SNEEZEGUARD PANEL. SET IN SLOT IN SOLID SURFACE & SECURED W/ SILICONE. LOCATED AT SNEEZEGUARD PANELS AS NEEDED TO PROTECT SOUP WELLS & DESSERT AREA. FOLLOW LOCAL HEALTH CODES.
 - 03 1" THICK SS-1 PANEL IF REQUIRED BY LOCAL HEALTH.
 - 04 SUPPORT WALL. SEE SECTION DETAILS.
 - 05 1X POPLAR APRON STAIN. STAIN TO MATCH ST-02.
 - 06 T-03 DECORATIVE TILE ON 1/2" PLYWOOD ON SUPPORT WALL. TILE PATTERNS STAGGERED VERTICALLY, RUNNING BOND.
 - 07 PURSE HOOK @ 37" AFF ALTERNATE WITH ELECTRICAL RECEPTACLES BTW CHAIRS (SPACE APPROXIMATELY 48" APART.)
 - 08 ELECTRICAL RECEPTACLES WITH USB PORT INSTALLED IN SUPPORT WALL SPACE ALTERNATELY WITH PURSE HOOKS BTW CHAIRS, APPROXIMATELY 48" APART.
 - 09 BRUSHED STAINLESS STEEL 1 1/2" DIA. TUBE FOOTRALL. 1/4" DIA. TUBE SET AT 1/2" FACE OF SUPPORT WALL WITH CHROME SUPPORT BRACKETS.
 - 10 3/4" X 3/4" STEEL ANGLE TO FINISH BOTTOM EDGE OF TILE INSTALLATION.
 - 11 STAINLESS STEEL COVE BASE.
 - 12 FRP ON SERVICE SIDE OF WALL SUPPORT WALL.
 - 13 PAINT UNDERSIDE OF COUNTER TOP SUBSTRATE BLACK.
 - 14 2X2 STEEL POST SET 4" INTO THE SLAB AND SECURED WITH EPOXY. SPACED APPROXIMATELY 5'-0" O.C.
 - 15 WHITE LED COVE LIGHT.

