




PERIMETER FENCING - SLIDING CANTILEVER GATE

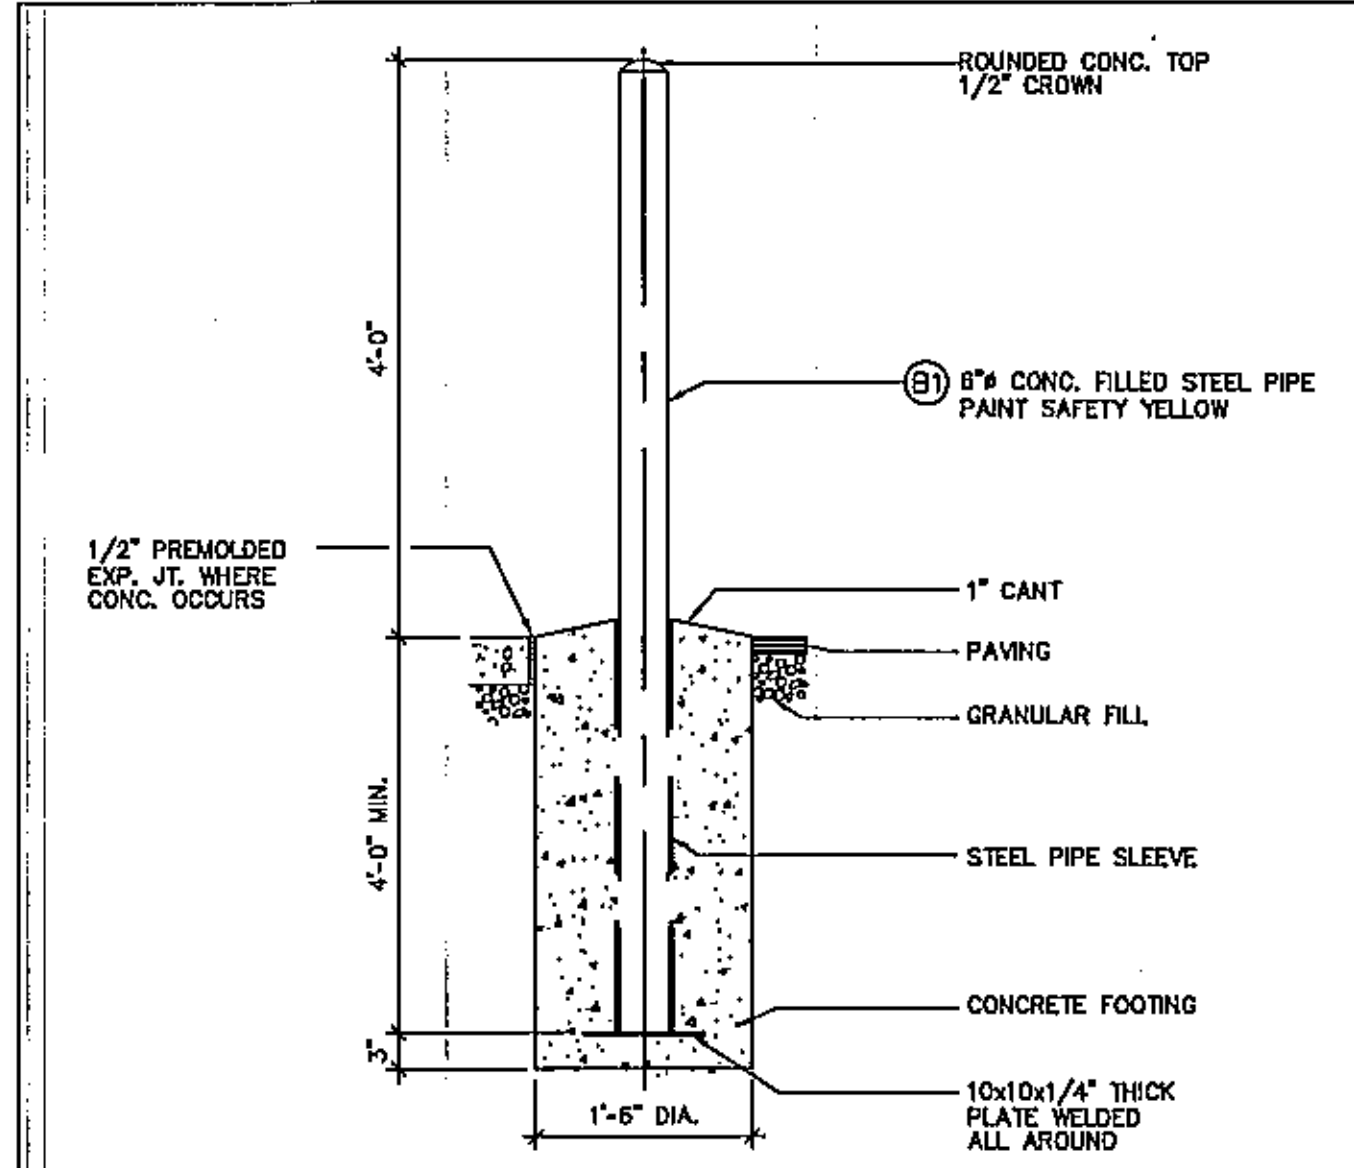

PROTECTIVE BARRIERS - DETAIL @ TYPICAL SITE PIPE BOLLARD

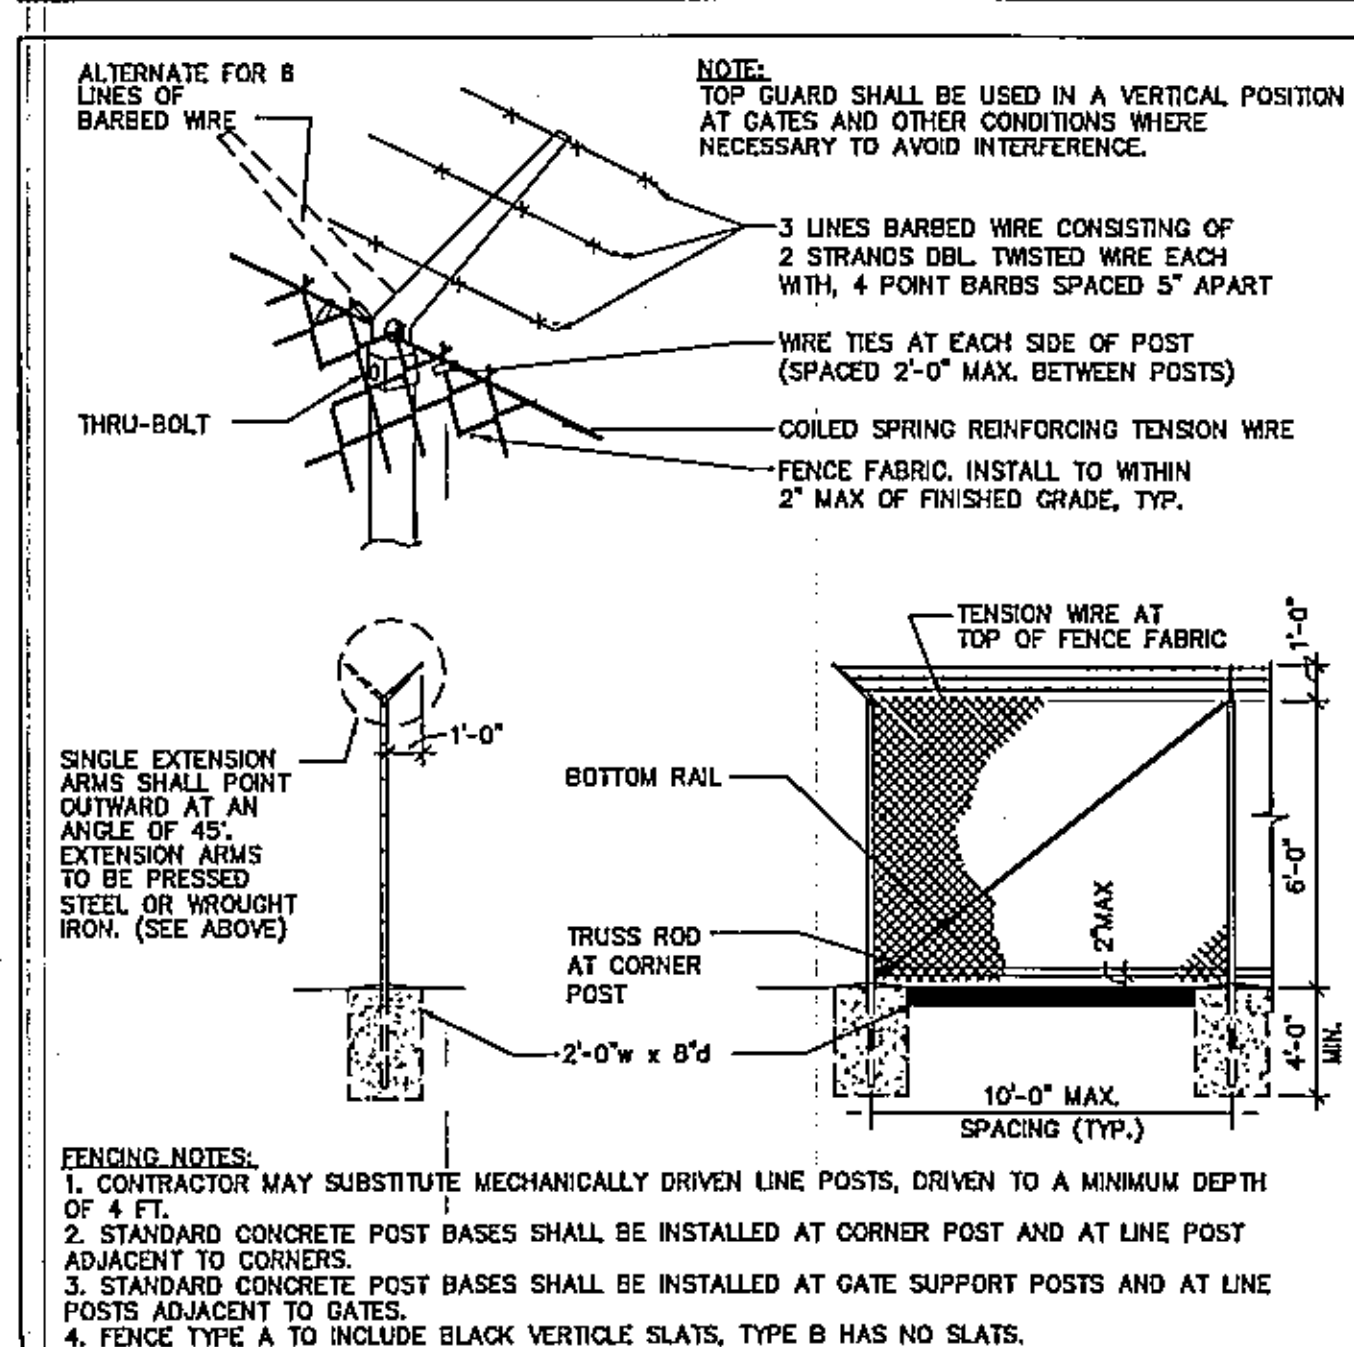


PERIMETER FENCING - CHAIN LINK FENCE AND TOP GUARD WITH MOW STRIP

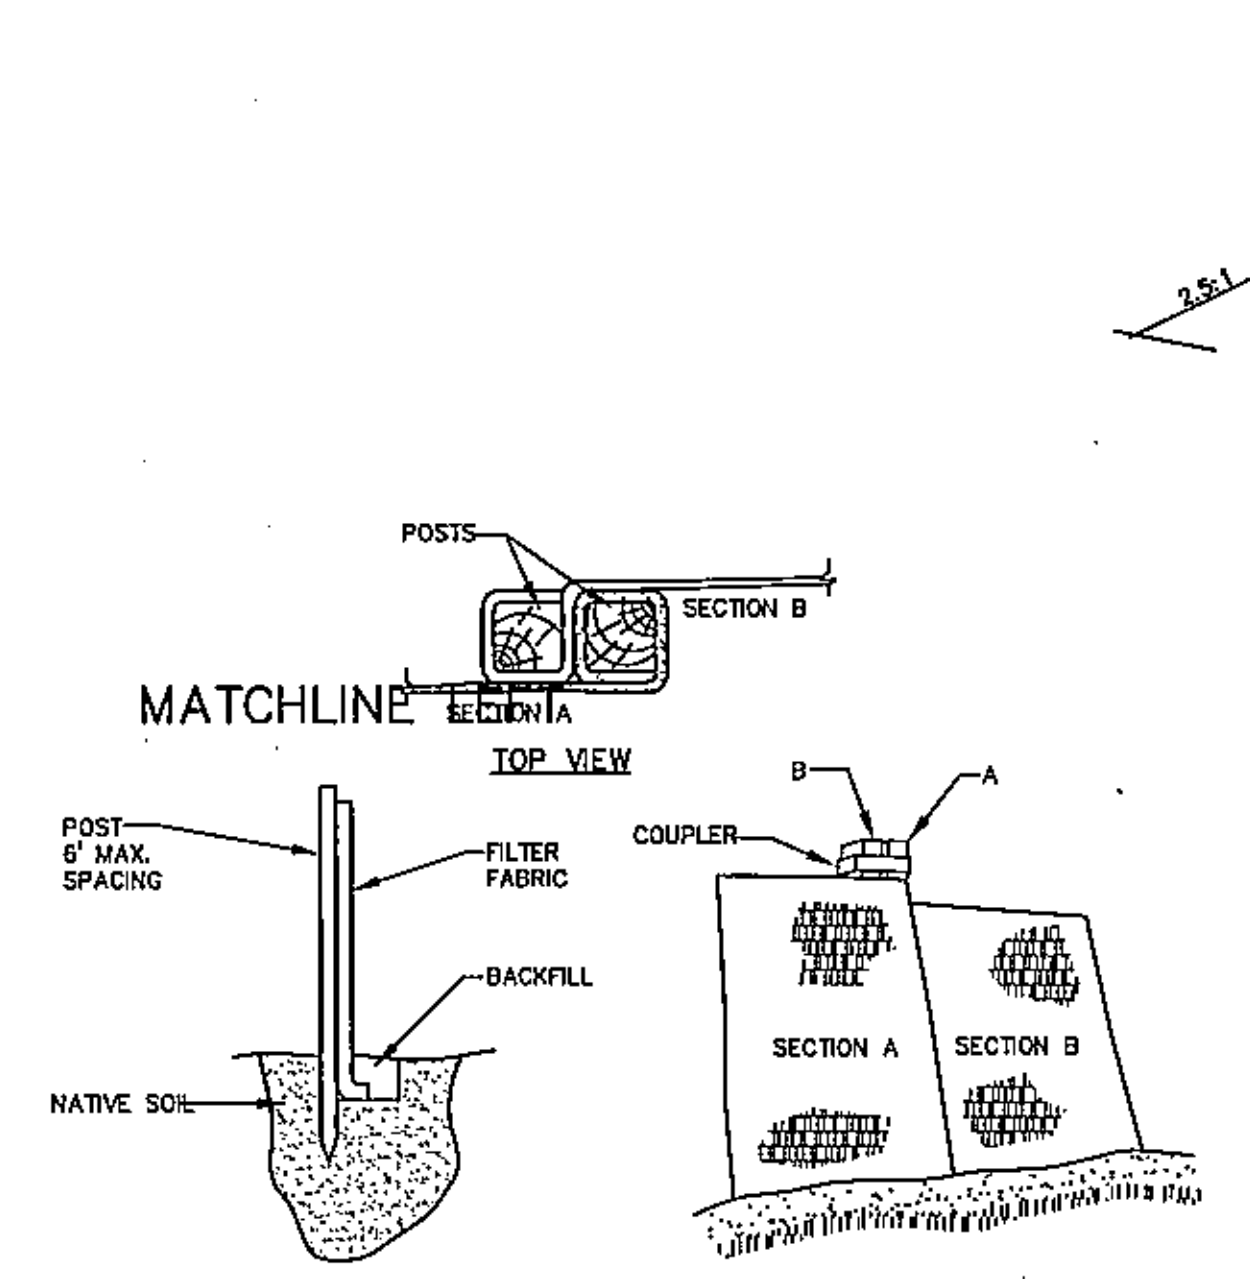


- INSTALLATION:**
1. EXCAVATE A 6" x 6" TRENCH ALONG THE LINE OF PLACEMENT FOR THE FILTER BARRIER.
 2. UNROLL A SECTION AT A TIME AND POSITION THE POSTS AGAINST THE BACK (DOWNSTREAM) WALL OF THE TRENCH.
 3. DRIVE POSTS INTO THE GROUND UNTIL APPROXIMATELY 2" OF FABRIC IS LYING ON THE TRENCH BOTTOM.
 4. LAY THE TOE-IN FLAP OF FABRIC ONTO THE UNDISTURBED BOTTOM OF THE TRENCH. BACKFILL THE TRENCH AND TAMP THE SOIL. TOE-IN CAN ALSO BE ACCOMPLISHED BY LAYING THE FABRIC FLAP ON UNDISTURBED GROUND AND PILING AND TAMPING FILL AT THE BASE, BUT MUST BE ACCOMPANIED BY AN INTERCEPTION DITCH.
 5. JOIN SECTION AS SHOWN ABOVE.
 6. BARRIER SHALL BE MIRAFI SILT FENCE OR EQUAL.


FILTER BARRIER
NOT TO SCALE

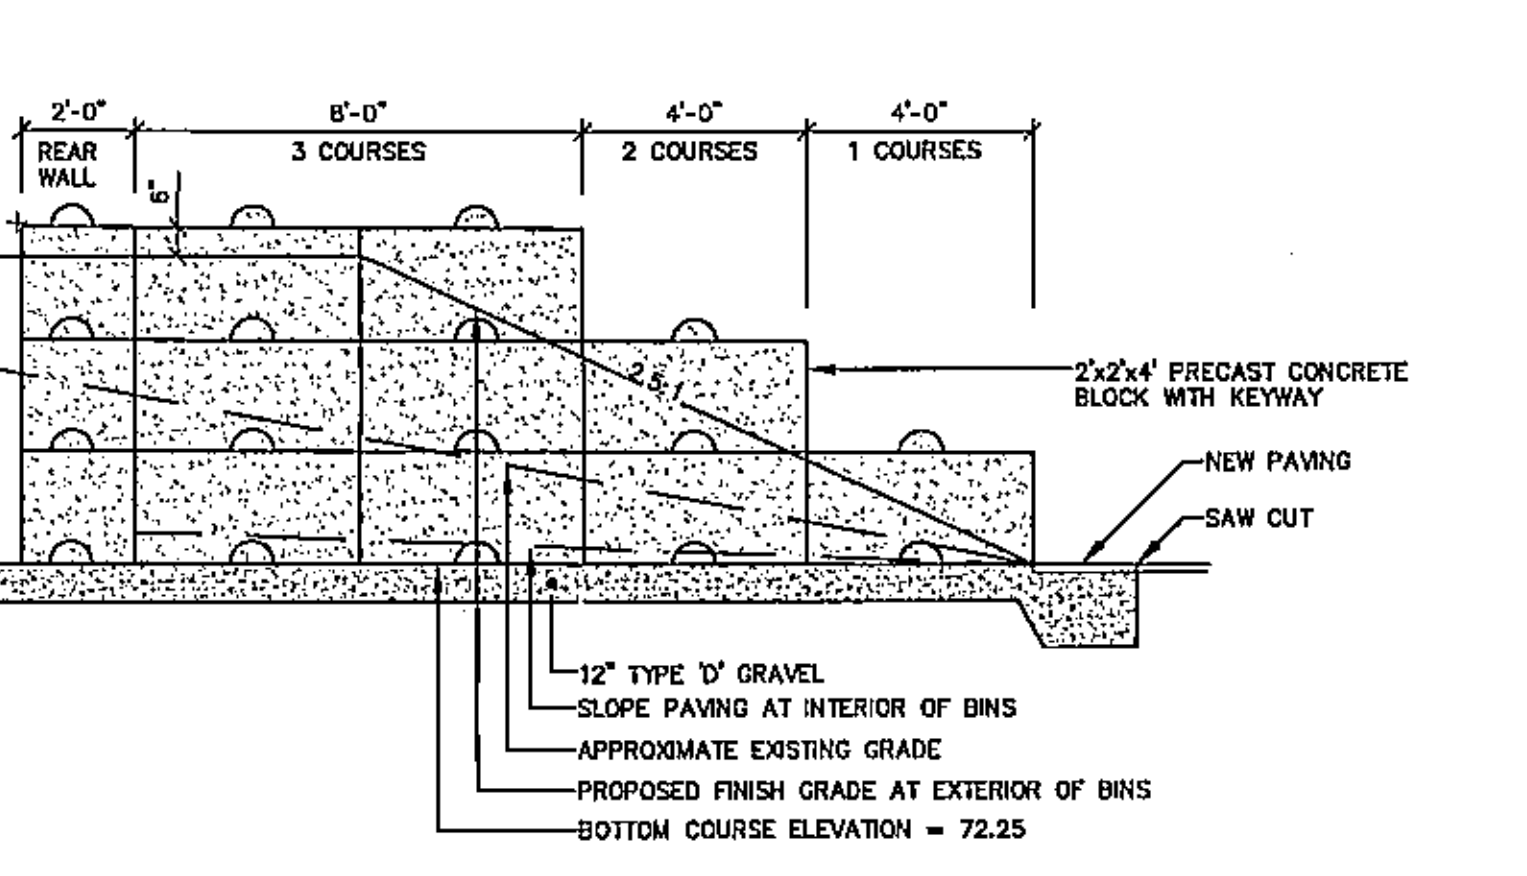


PRECAST CONCRETE AGGREGATE BINS
NOT TO SCALE

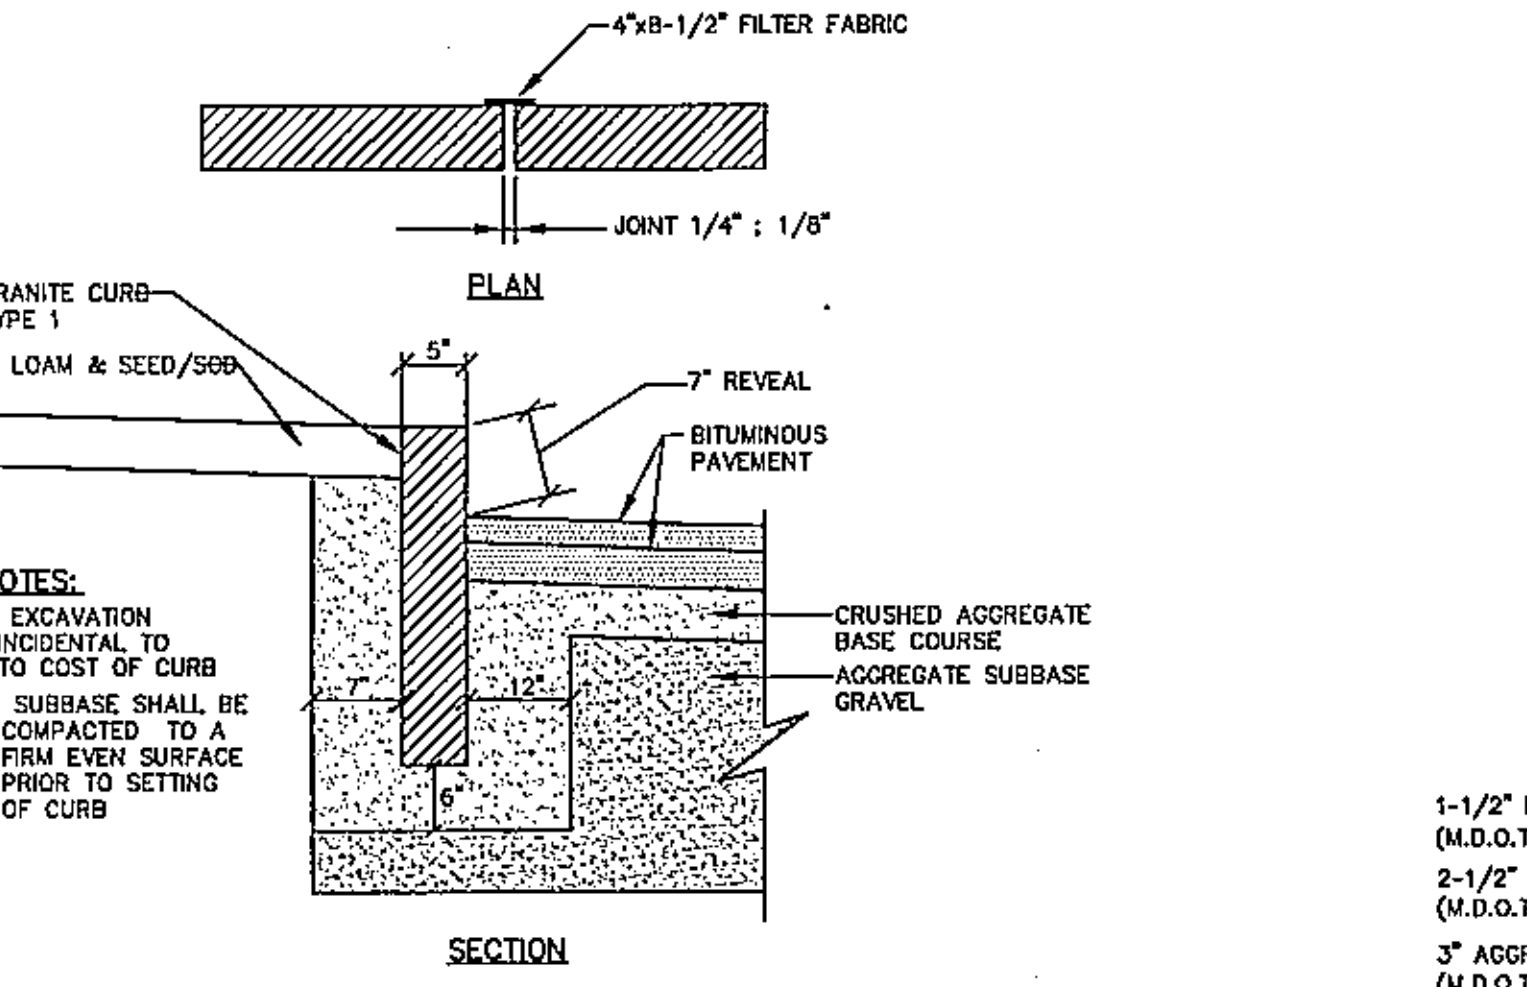


VERTICAL GRANITE CURB
NOT TO SCALE

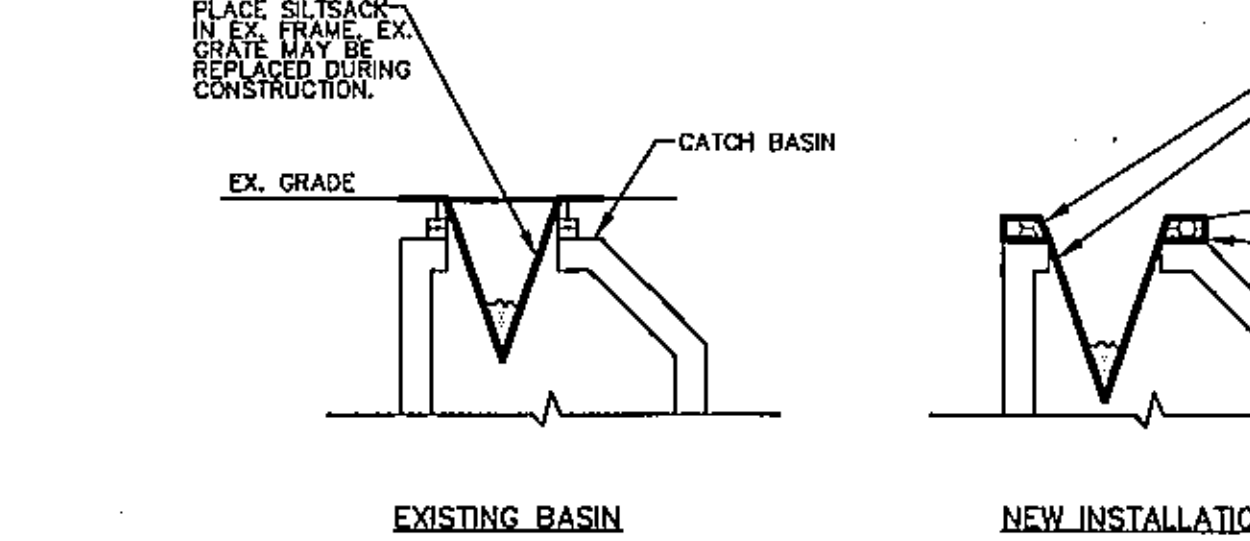


CATCH BASIN PROTECTION DETAIL (FOR PAVED AREAS)
NOT TO SCALE

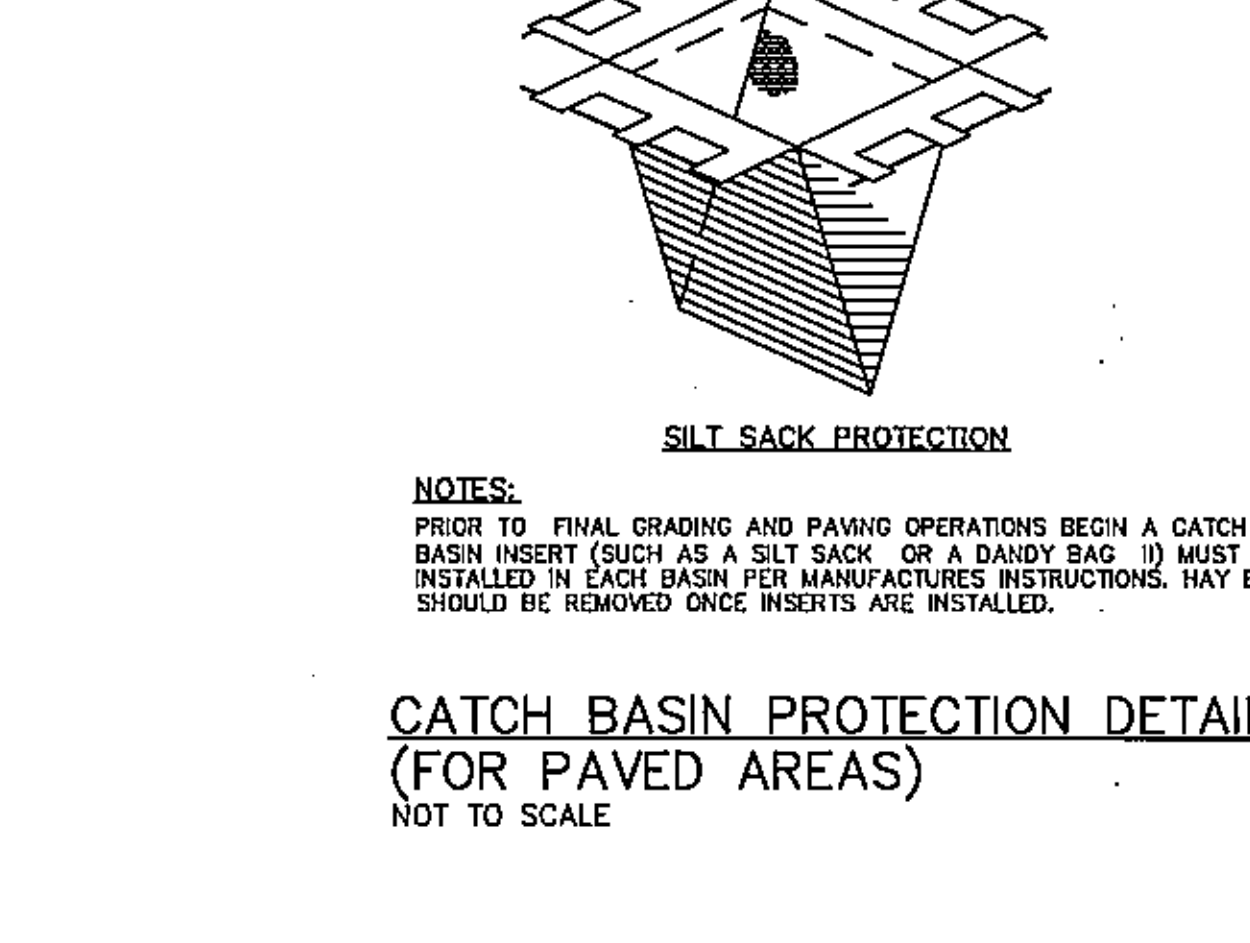


TYPICAL UNDERGROUND CABLE INSTALLATION
NOT TO SCALE

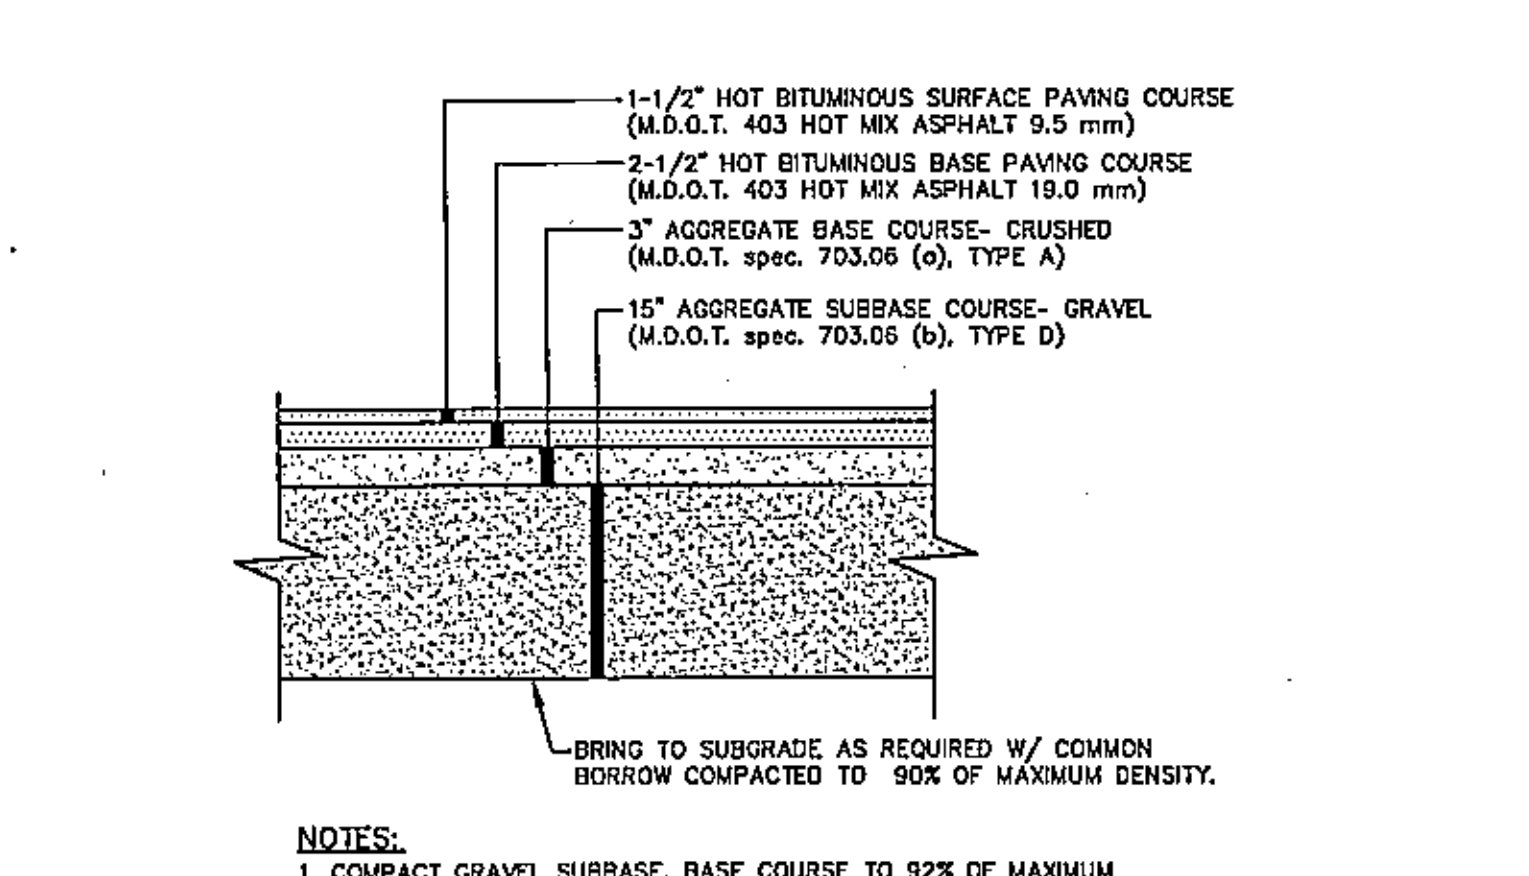


TYP. PAVED PARKING LOT SECTION
NOT TO SCALE

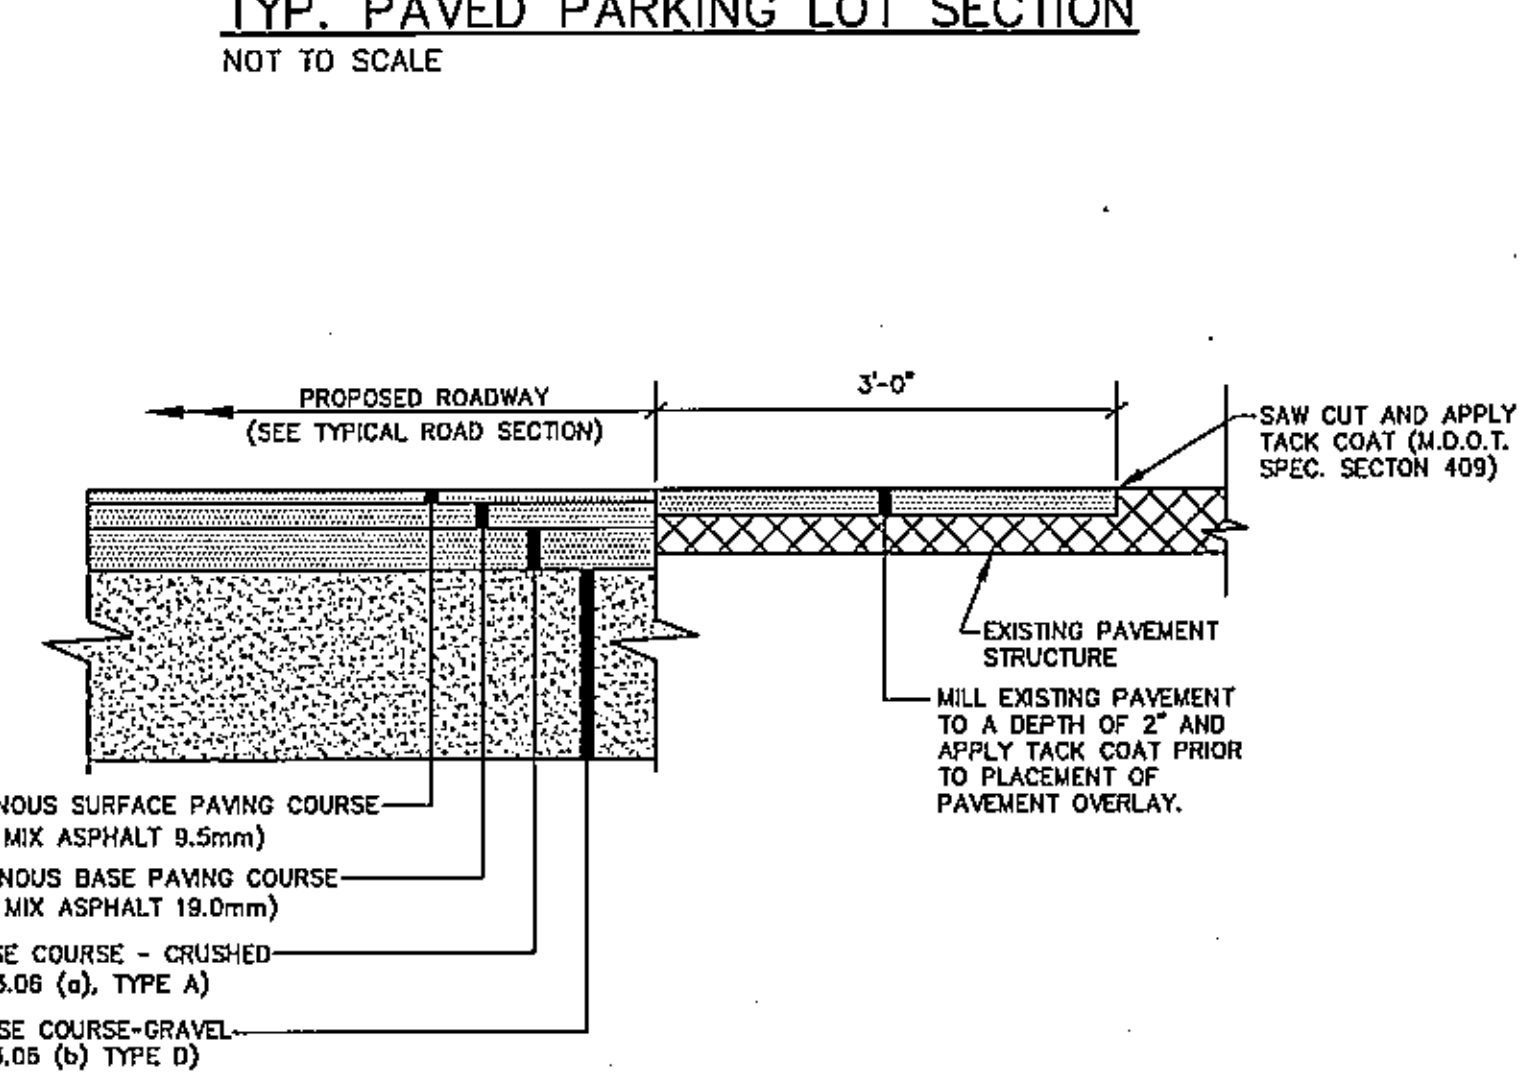


TYPICAL PAVEMENT JOINT
NOT TO SCALE

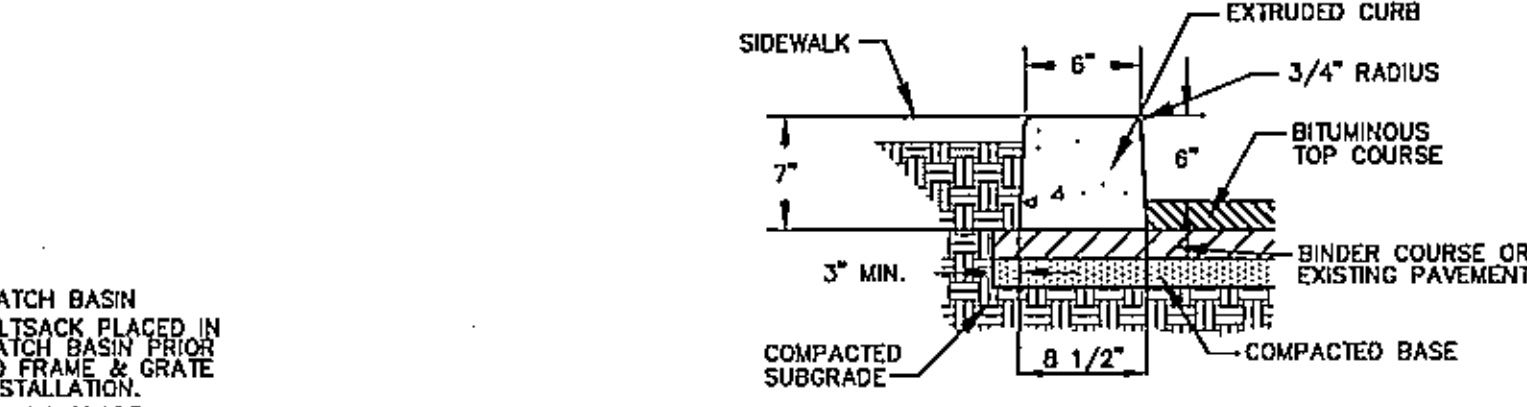

SLIPFORM CONCRETE CURB
NOT TO SCALE

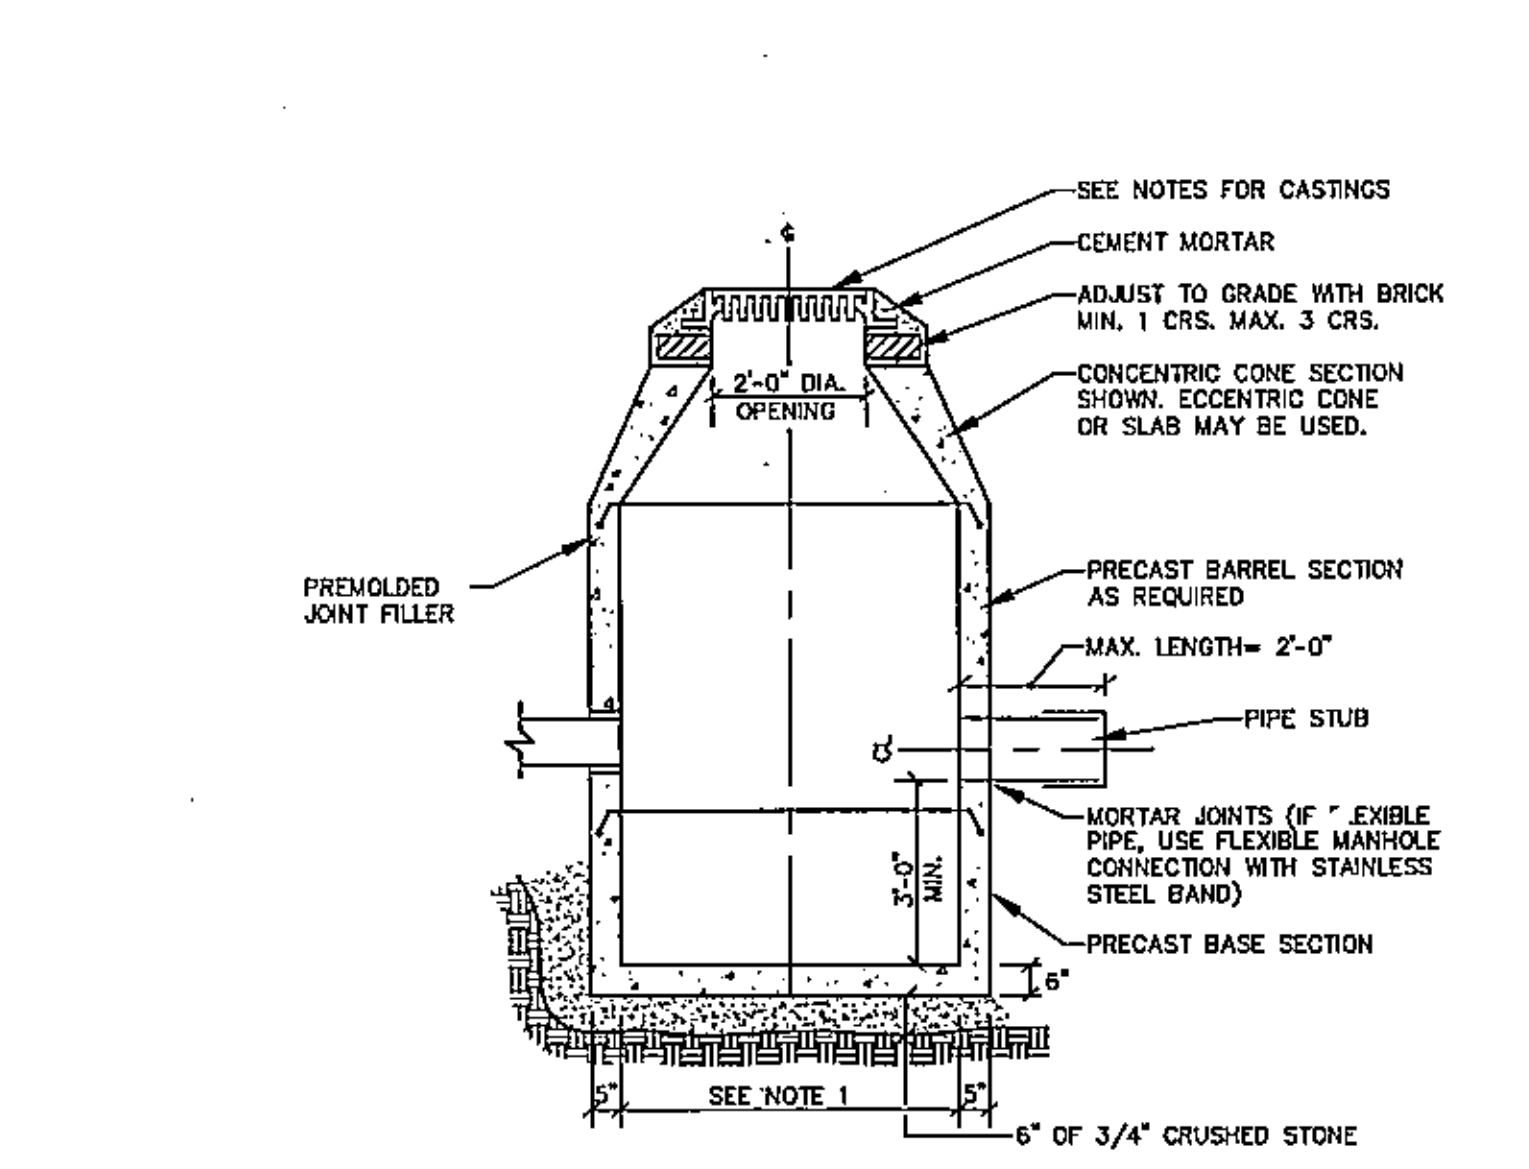

TYPICAL CATCH BASIN
NOT TO SCALE

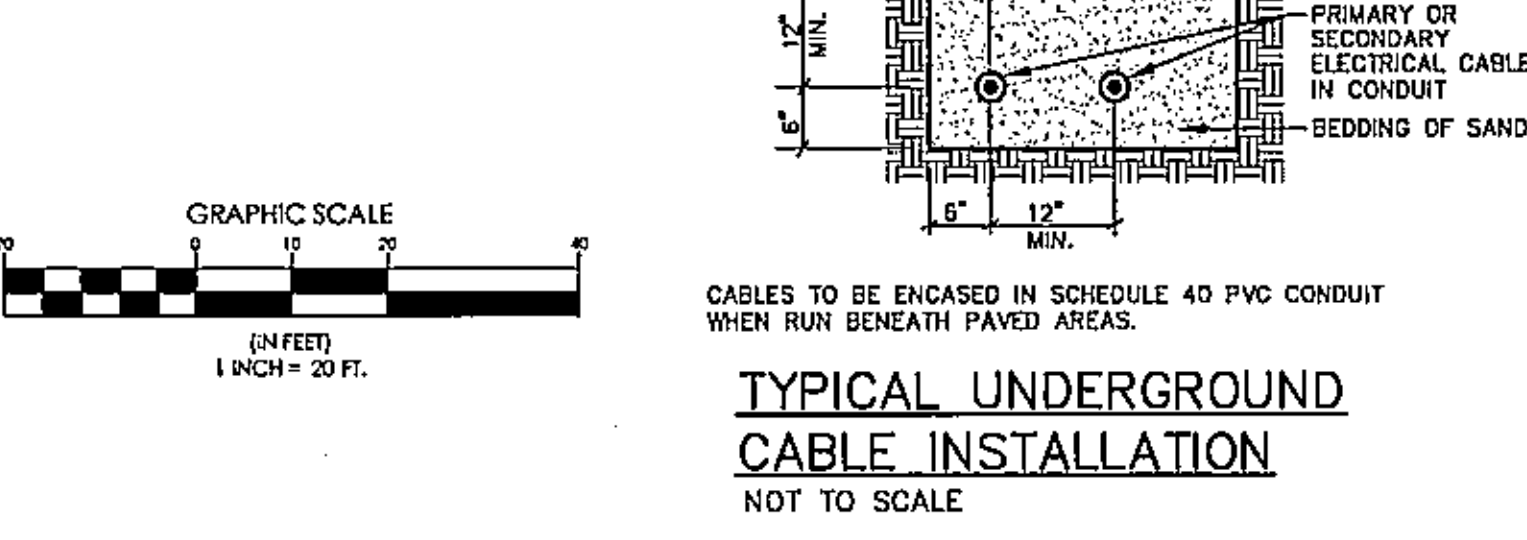

TYPICAL UNDERGROUND CABLE INSTALLATION
NOT TO SCALE

DESIGNED	CHECKED
WTC	WTC

ISSUED FOR CITY OF PORTLAND PERMITTING

REV: BY DATE STATUS: 4-17-15 ISSUED FOR CITY OF PORTLAND PERMITTING

75 John Roberts Rd., Suite 1A, South Portland, ME 04106
 Tel: 207-785-5656
 Fax: 207-785-5655
 WWW.SEBAGOTECHNICS.COM

SEBAGO TECHNICS

NORTHERN UTILITIES, INC. PORTLAND DOC FIT-UP

PROJECT NO.	SCALE
14453	NTS

SHEET C1.2

14453D.dwg, TAB D