




COPYRIGHT
PDT Architects
Reuse or reproduction of the contents of this document is not permitted without written permission of PDT Architects.

Lowell Street 3rd & 4th Floor Renovations
15 Lowell Street, Portland, Maine 04101

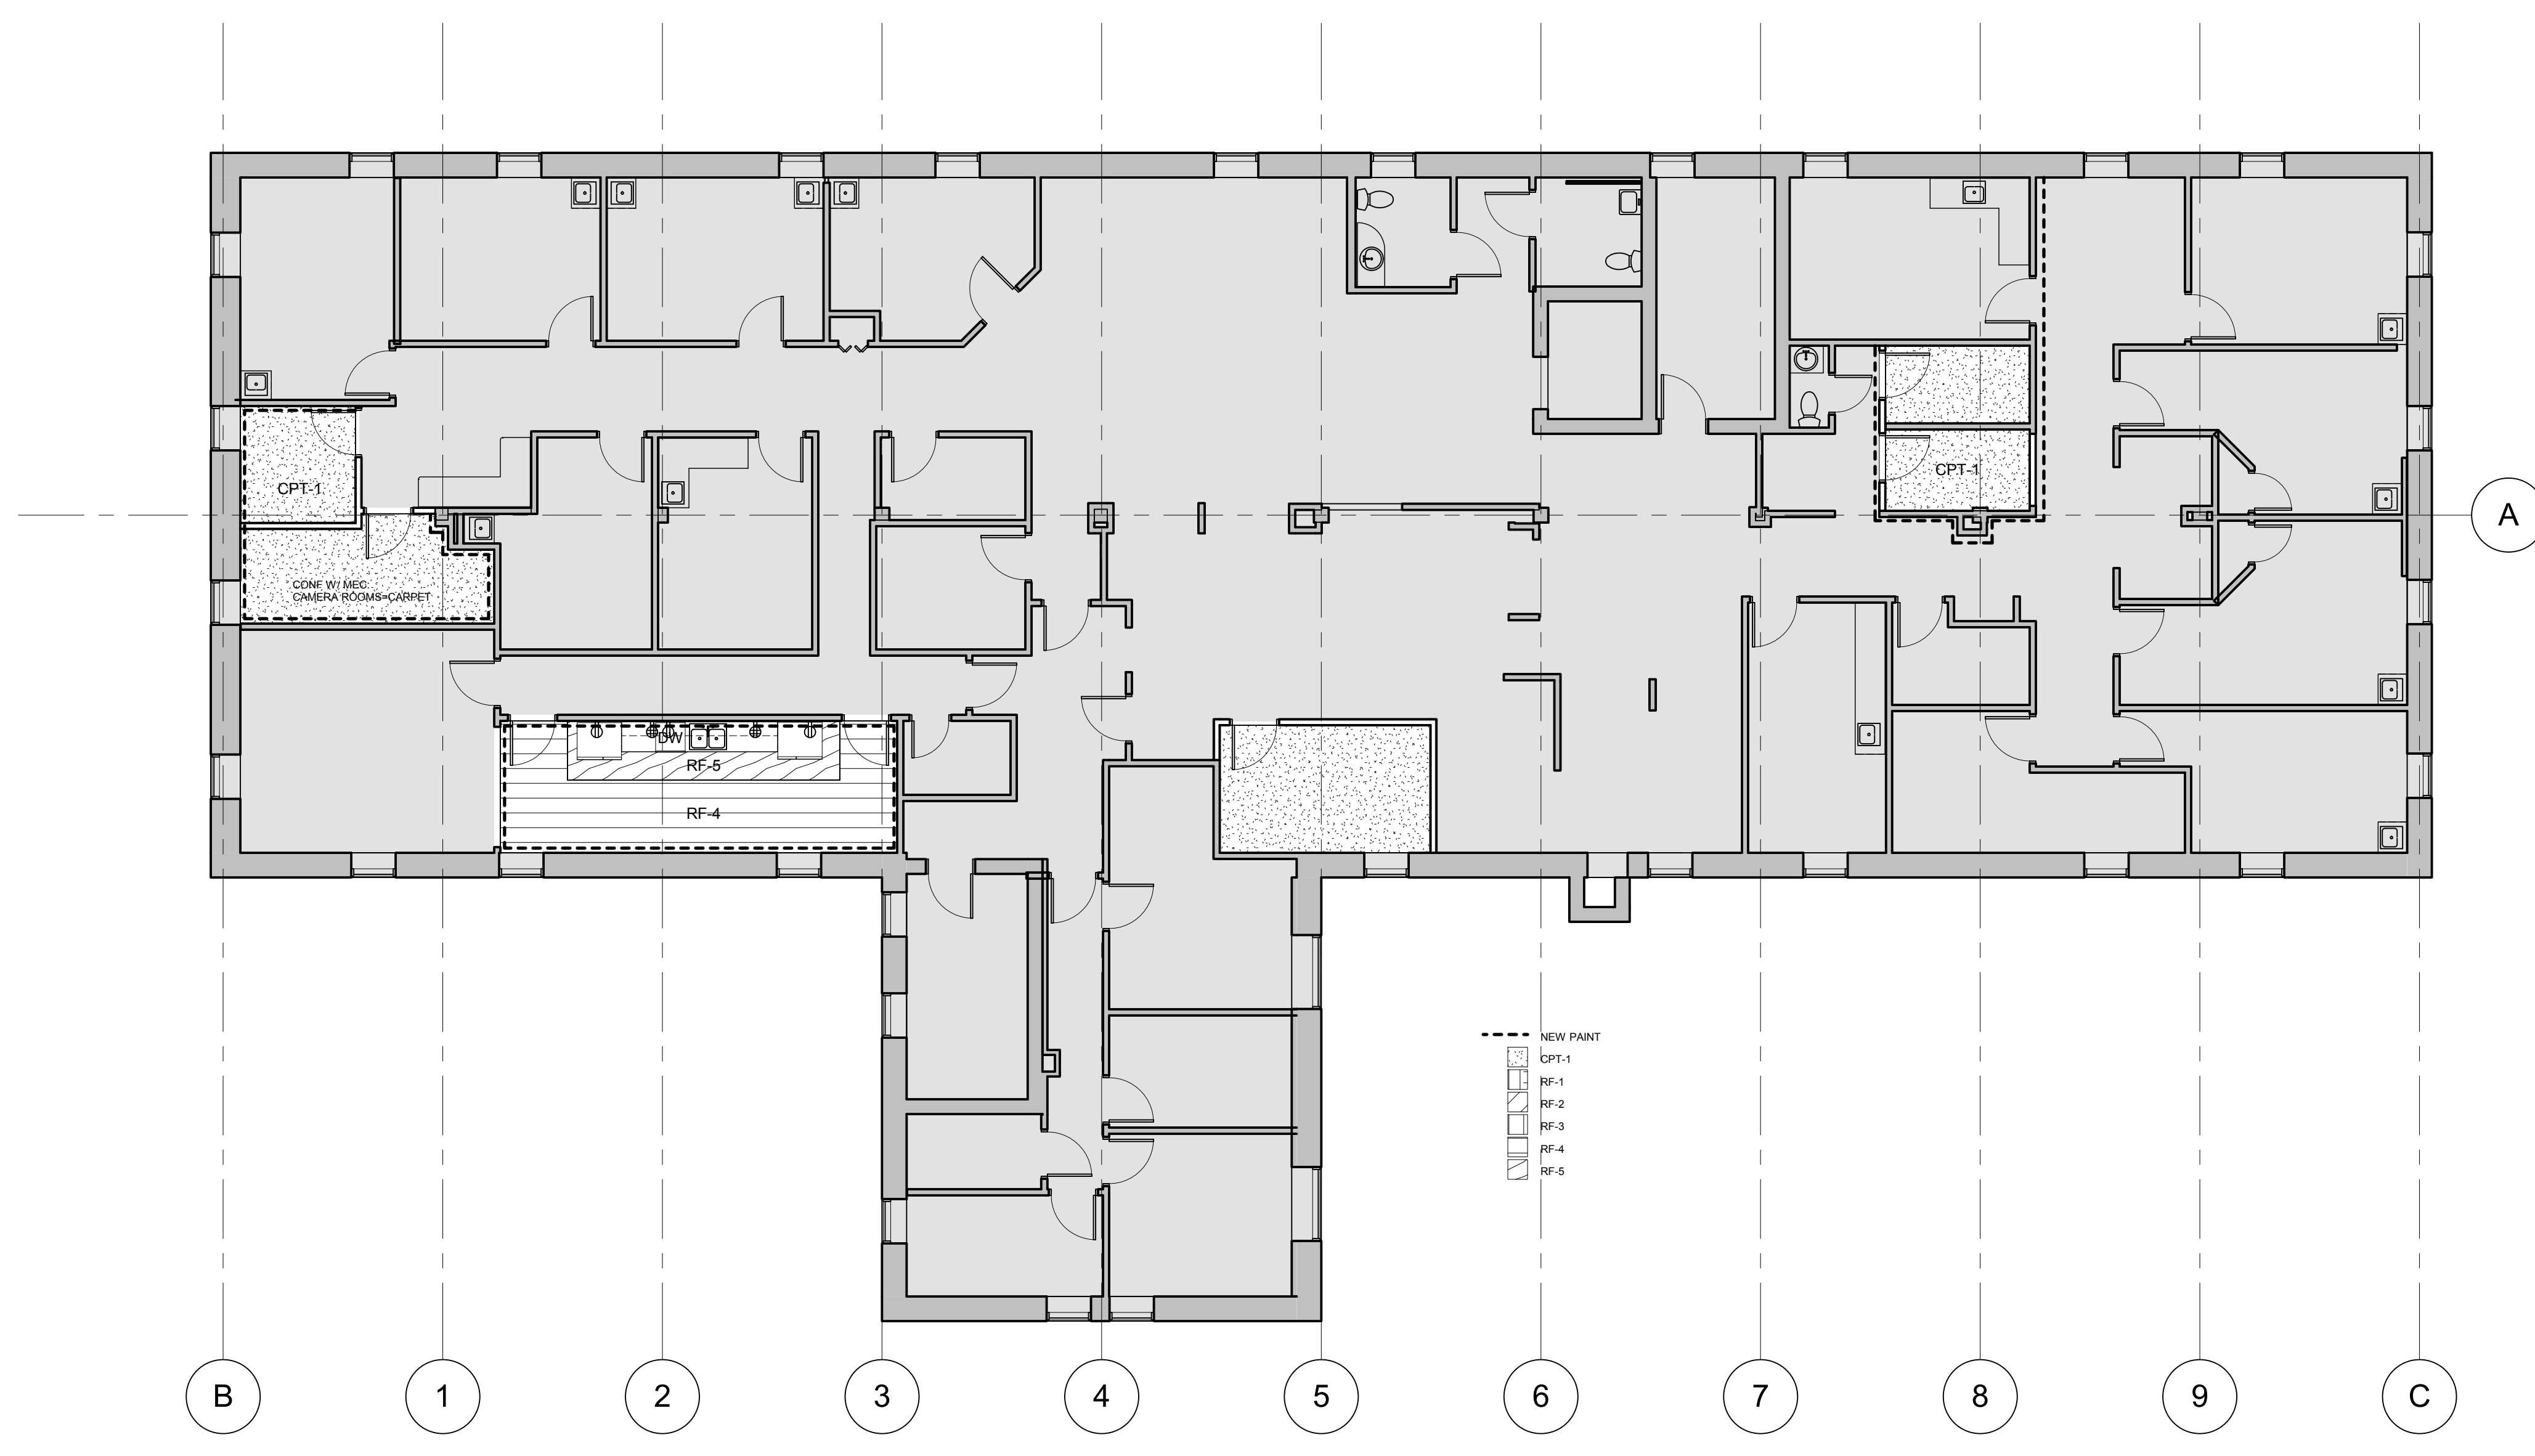


Floor Schedule				
Type Mark	Manufacturer	Model	Color/Pattern	Comments
CPT-1	Lees Mohawk	Tranquil Beauty		
RF-1	Johnsonite/Tarkett	Accent	29011 Allover Wood Grige	Weld Seams
RF-2	Nora	Noraplan Sentica 3mm	CARRY 2 COLORS	Heat Weld Seams; Dryfix Tape or NXT Adhesive
RF-3	Gerflor	Mipolam Symbioz	Clay 6041	Heat Weld Seams
RF-4	Mohawk Group	Hot & Heavy - Bolder	River Rock	
RF-5	Procedo	Loom+Design	2103	Quarter Turn Install

1 Level 3 - Finishes Plan
1/8" = 1'-0"

Room Finish Schedule - Phase 1										
Phase	NUMBER	ROOM NAME	Finish Style (Hide)	FLOOR	BASE MATL	WALLS				NOTES
						N	S	E	W	
Phase 1	310A	Visual Field 1	(none)	CPT-1						
Phase 1	310B	Visual Field 2	(none)	CPT-1						
Phase 1	318	Kitchen/ Break	(none)	RF-4 & RF-5						
Phase 1	332	Office	(none)							
Phase 1	350	SpectraIs	(none)	CPT-1						
Phase 1	412	Exam 8	(none)	RF-1	RB-1					
Phase 1	421	I&R	(none)	RF-1	RB-1					
Phase 1	427	Expanded Kitchen/ Break	(none)	RF-4 & RF-5						
Phase 1	441	Tech	(none)	CPT-1						
Phase 1	442	Soiled Processing	(none)	RF-3						
Phase 1	443	Minor Procedure	(none)	RF-2						
Phase 1	444	Testing	(none)	CPT-1						
Phase 1	450	Lab	(none)	RF-1						
Phase 1	451	Exam 3	(none)	RF-1	RB-1					

#	Date	Description
		Revision Schedule

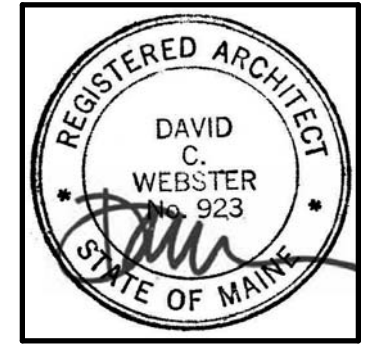

JOB NO.
16064

DRWN: CHK
Author Checker

SCALE:

ISSUE:
Permit Set
June 16, 2017

TITLE:
Level 3 - Finish Plan

SHEET
AF103