


1 Level 2 - Finishes Plan
1/8" = 1'-0"

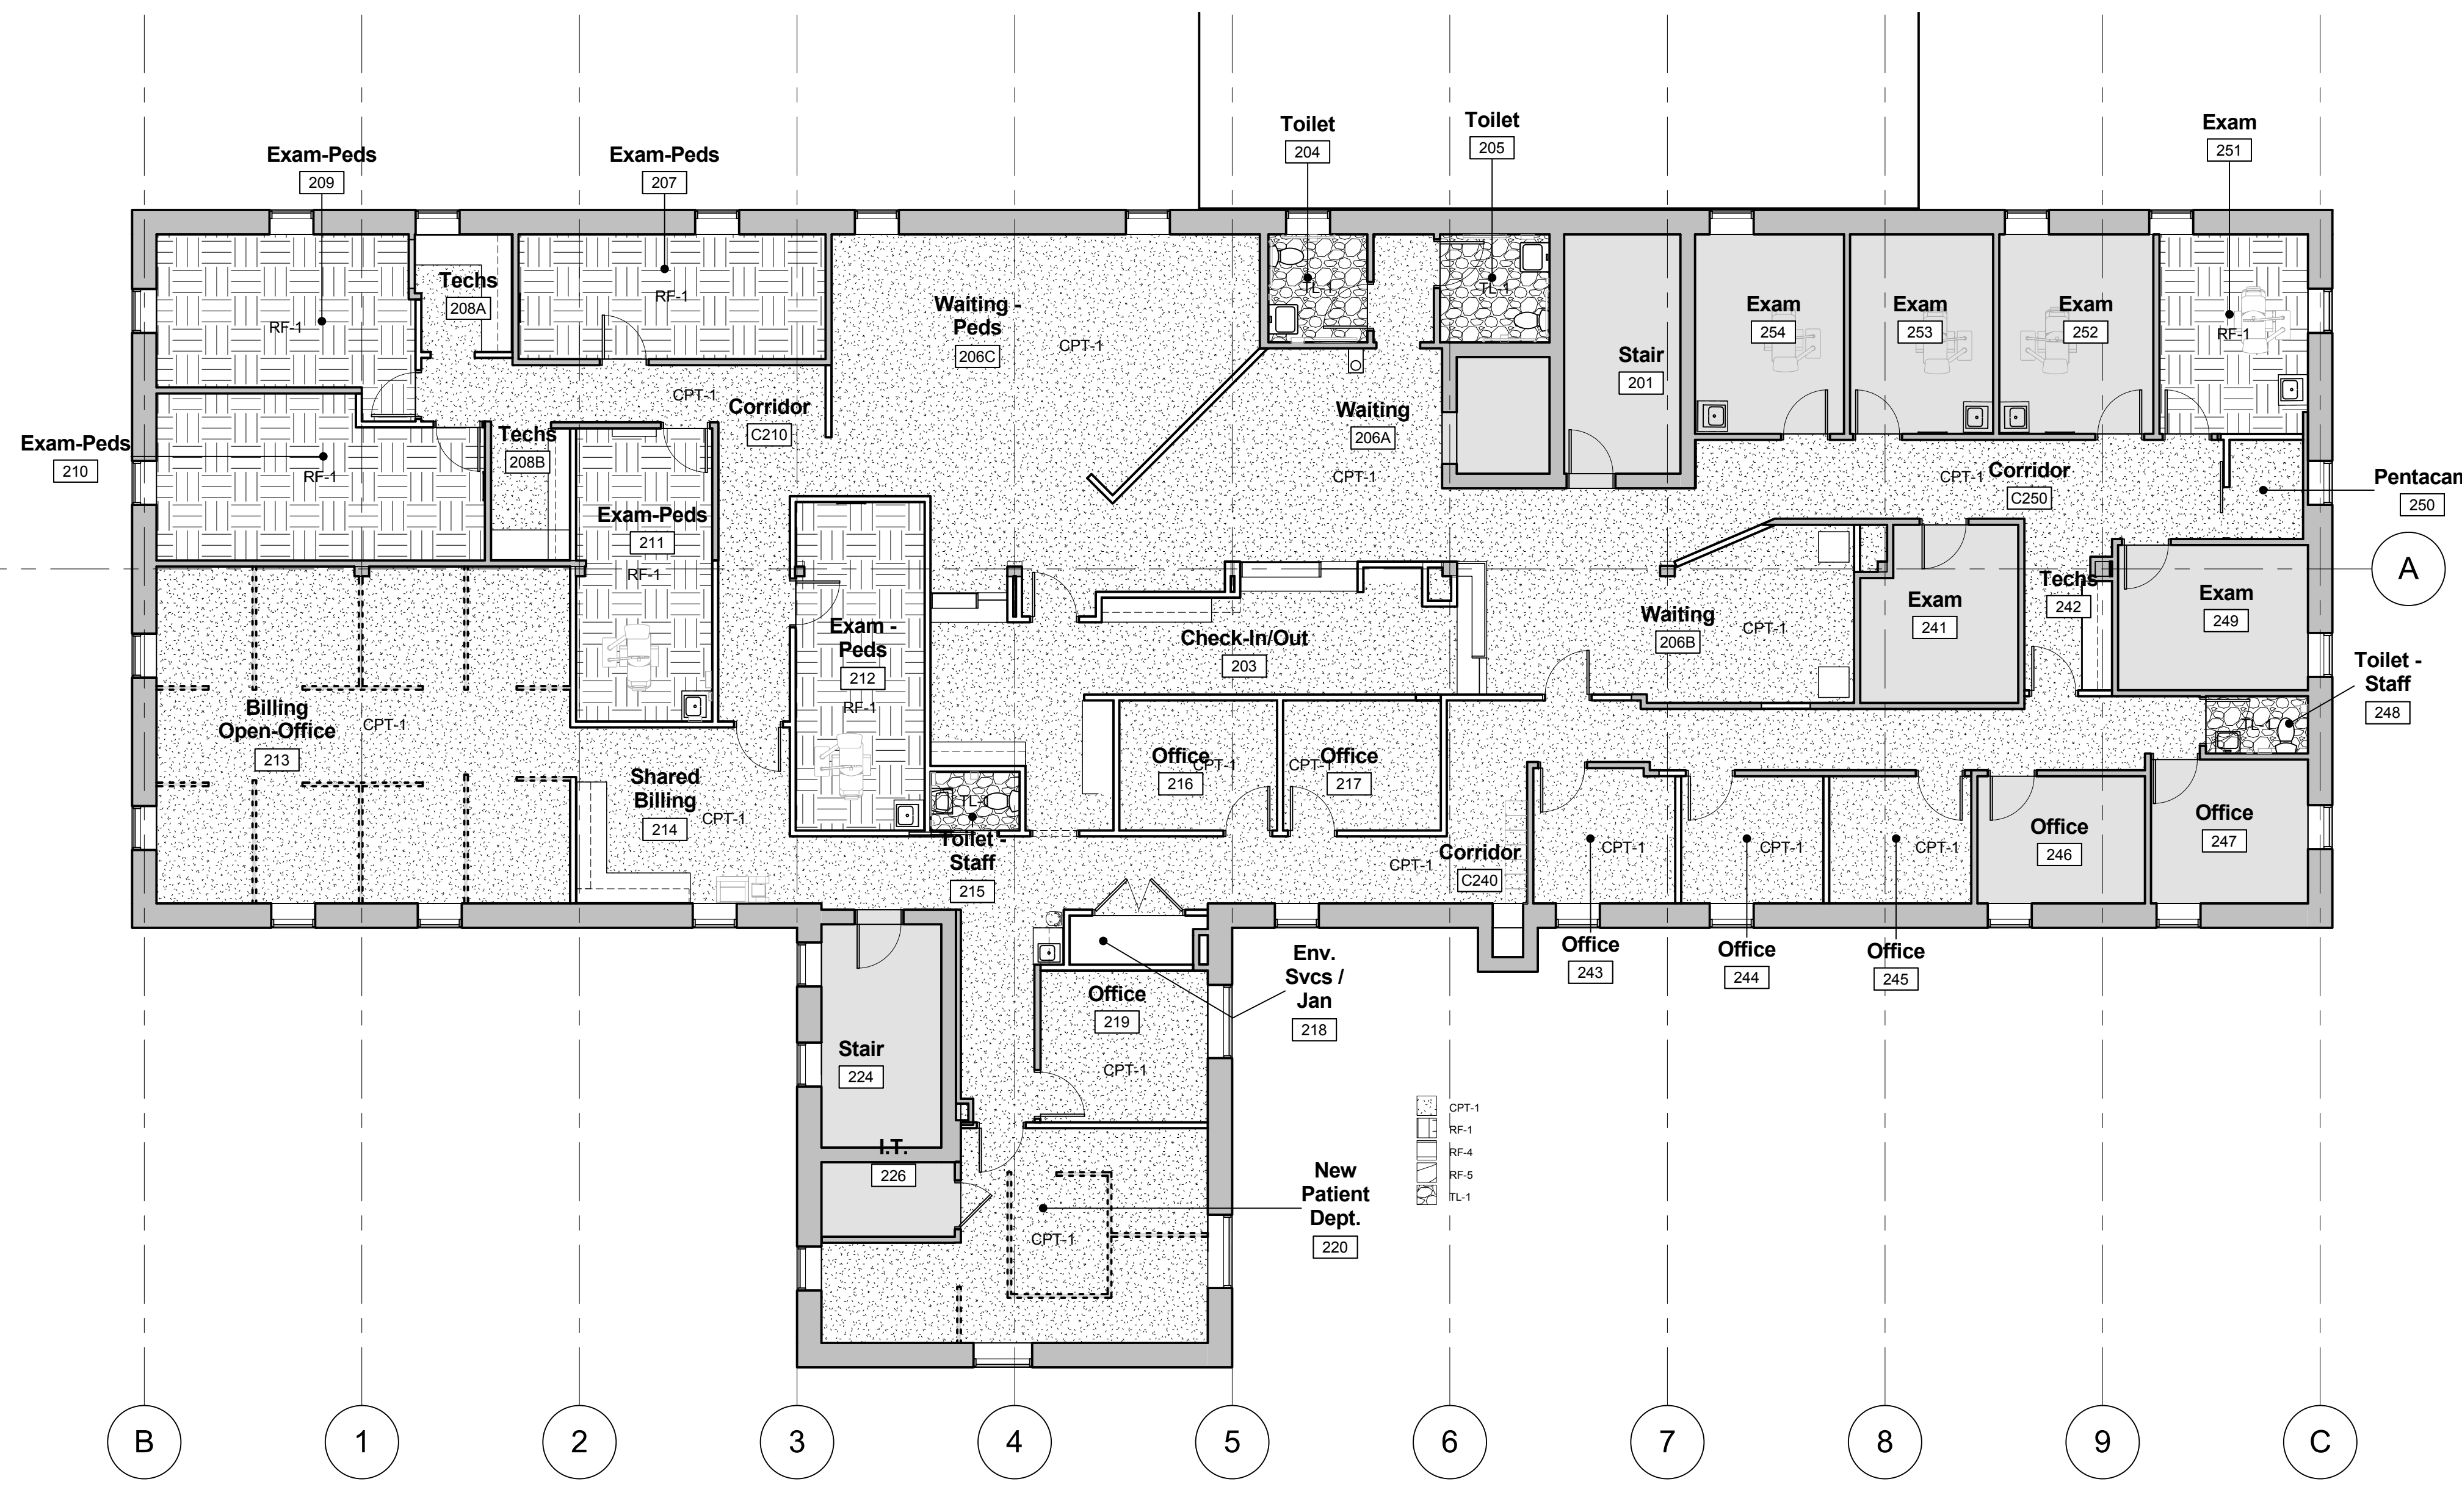

Floor Schedule				
Type Mark	Manufacturer	Model	Color/Pattern	Comments
CPT-1	Less Mohawk	Tranquil Beauty	Tradition 951	With EcoFlex NXT AIR Backing; Random Install
RF-1	Johnsonite/Tarkett	Accent	29011 Allover Wood Grege	Weld Seams
RF-4	Mohawk Group	Hot & Heavy - Bolder	River Rock 832	
RF-5	Procedo	Loom+Design	2103	Quarter Turn Install
TL-1	Crossville Ceramics	Basalt 12 x 24	AV291 Silica	Offset Install

Floor & Wall Accessories Schedule			
Type Mark	Manufacturer	Model	Comments
RB-1	Johnsonite 4" TightLock Rubber	Snow White 01	Straight with carpet. Cove with resilient
RB-2	Johnsonite 4" TightLock Rubber	Brass 176	Straight with carpet. Cove with resilient
TB-1	Crossville Ceramics Basalt 6 x 12 Cove Base	Silica AV291	
WT-1	Crossville Basalt 12 x 24	Silica AV291	Offset Install
G-1	Mapei Grout	Biscuit	Sanded and unsanded where required
FT-1	Schluter Jolly	Brushed Nickel Anodized Aluminum (ATGB)	Wall tile finishing trim; GC to coordinate with tile thicknesses
FT-2	Schluter Schiene	Bright Nickel Anodized Aluminum (ATB)	Floor tile edge guard; GC to coordinate with tile thicknesses
FT-3	Schluter Schiene	Bright Nickel Anodized Aluminum (ATB)	Floor tile edge guard - radius; GC to coordinate with tile thicknesses


Finish Schedule			
Type Mark	Manufacturer	Model	Comments
PLAM-1	Abet Laminati	388	Microline Finish
PLAM-2	Wilsonart	Studio Teak 7960K	18 Linearty Finish
PLAM-3	Abet Laminati	385	Sa Due Finish
PLAM-4	Pionite	Slate SG228	Suede Finish
PLAM-5	Arborite	Nuno Glace P-387	CA Finish
CT-1	Caesarstone	Fresh Concrete 4001	
CT-2	Caesarstone	Raven 4120	
CT-3	Corian	Cameo White	
CT-4	Corian	Deep Titanium	
CT-5	Corian	Glacier Ice	
WD-1	Maine Heritage Lumber	Heritage Plank	1/2" Thick; Ceiling & Wall
FWP-1	Kirei Echopanel	325 Viridian Green	12 mm; Class A Treatment
FWP-2	Kirei Echopanel	381 Lime Spice	12 mm; Class A Treatment
FWS-1	Kirei Penta Shape	325 Viridian Green	12 mm; Class A Treatment
FWS-2	Kirei Penta Shape	381 Lime Spice	12 mm; Class A Treatment
WC-1	DL Couch	Bermuda Grass Fairway Green	
WF-1	Solyx	TBD	Needed for HIPPA in Med Records
WS-1	Draper	LightBlock Manual FlexShade	Blackout shades for exam rooms
WS-2	Draper	TBD	If no blackout required
PT-1	Benjamin Moore	White Down OC-131	
PT-2	Sherwin Williams	Loggia SW7506	
PT-3	Sherwin Williams	Anonymous SW7046	
PT-4	Sherwin Williams	SW6766 Mariner	
PT-5	Sherwin Williams	SW6703 Frolic	
F-1	Maharam	Tandem 466321	009 Regatta
F-2	Maharam	Dapper 466316	017 Cornflower
F-3	DesignTex	Beguiled by the Wild 3495-501	Tree Frog
F-4	DesignTex	Beguiled by the Wild 3495-402	Hummingbird
F-5	DesignTex	Beguiled by the Wild 3495-102	Brown Bear

WALL GAME SCHEDULE				
Type Mark	Manufacturer	Name	Model	Location
WG-1	Gressco/HABA	Learning Wall, Curve A	120216	Peds Waiting Bench Back
WG-2	Gressco/HABA	Learning Wall, Dip B	120221	Peds Waiting Bench Back
WG-3	Gressco/HABA	Learning Wall, Curve B	120219	Peds Waiting Bench Back
WG-4	Gressco/HABA	Labyrinth	023139	Peds Exam Wall
WG-5	Gressco/HABA	Colorful Squares	023145	Peds Exam Wall
WG-6	Gressco/HABA	Special Effects Turning Discs	120390	Peds Exam Wall
WG-7	Gressco/HABA	Wooden Bar	092762	Peds Exam Wall
WG-8	Gressco/HABA	Wall Foli Out	092759	Peds Exam Wall

Room Finish Schedule - Phase 2									
Phase	NUMBER	ROOM NAME	FLOOR	BASE MATL	WALLS				NOTES
					N	S	E	W	
Phase 2	105	Info Desk	CPT-1	RB-2					
Phase 2	107	Optical Shop	CPT-1	RB-2					
Phase 2	107A	Optical Waiting	CPT-1	RB-2					
Phase 2	108	Optical Work	RF-1	RB-1					
Phase 2	112	Office	CPT-1	RB-2					
Phase 2	116	Office	CPT-1	RB-2					
Phase 2	117	Toilet - Staff	TL-1	N/A	WT-1/PT-1	WT-1/PT-1	WT-1/PT-1	WT-1/PT-1	
Phase 2	118	Kitchenette	RF-4	RB-2					WC BETWEEN BACKSPLASH AND UPPER CABINETS
Phase 2	122	Office	CPT-1	RB-2					
Phase 2	123	Office	CPT-1	RB-2					
Phase 2	123A	Central Supply							
Phase 2	126	Toilet - Staff	TL-1	TB-1	PT-1	PT-1	PT-1	PT-1	
Phase 2	127A	Toilet	TL-1	N/A	WT-1/PT-1	WT-1/PT-1	WT-1/PT-1	WT-1/PT-1	
Phase 2	127B	Toilet	TL-1	N/A	WT-1/PT-1	WT-1/PT-1	WT-1/PT-1	WT-1/PT-1	
Phase 2	128	Lobby	CPT-1	RB-2					
Phase 2	128A	Med Records							
Phase 2	128B	Switchboard							
Phase 2	130	Check In	CPT-1	RB-2					
Phase 2	131	Storage	RF-1	RB-2					
Phase 2	132	Waiting	CPT-1	RB-2					
Phase 2	134	Exam							
Phase 2	140	Techs	CPT-1	RB-2					
Phase 2	141	Testing	CPT-1	RB-2					
Phase 2	203	Check-In/Out	CPT-1	RB-2					
Phase 2	204	Toilet	TL-1	TB-1	PT-1	PT-1	PT-1	PT-1	
Phase 2	205	Toilet	TL-1	TB-1	PT-1	PT-1	PT-1	PT-1	
Phase 2	206A	Waiting	CPT-1	RB-2					
Phase 2	206B	Waiting	CPT-1	RB-2					
Phase 2	206C	Waiting - Peds	CPT-1	RB-2					3 WG ON BENCHES WG TO BE INSTALLED
Phase 2	207	Exam-Peds	RF-1	RB-1					
Phase 2	208A	Techs	CPT-1	RB-2					
Phase 2	208B	Techs	CPT-1	RB-2					
Phase 2	209	Exam-Peds	RF-1	RB-1					WG TO BE INSTALLED WG TO BE INSTALLED
Phase 2	210	Exam-Peds	RF-1	RB-1					WG TO BE INSTALLED WG TO BE INSTALLED
Phase 2	211	Exam-Peds	RF-1	RB-1					
Phase 2	212	Exam - Peds	RF-1	RB-1					
Phase 2	213	Billing Open-Office	CPT-1	RB-2					
Phase 2	214	Shared Billing	CPT-1	RB-2					
Phase 2	215	Toilet - Staff	TL-1	N/A	WT-1/PT-1	WT-1/PT-1	WT-1/PT-1	WT-1/PT-1	
Phase 2	216	Office	CPT-1	RB-2					
Phase 2	217	Office	CPT-1	RB-2					
Phase 2	218	Env. Svcs / Jan							
Phase 2	219	Office	CPT-1	RB-2					
Phase 2	220	New Patient Dept.	CPT-1	RB-2					
Phase 2	242	Techs	CPT-1	RB-2					
Phase 2	243	Office	CPT-1	RB-2					
Phase 2	244	Office	CPT-1	RB-2					
Phase 2	245	Office	CPT-1	RB-2					
Phase 2	248	Toilet - Staff	TL-1	TB-1	PT-1	PT-1	PT-1	PT-1	
Phase 2	250	Pentacam	CPT-1	RB-2					
Phase 2	251	Exam	RF-1	RB-1					
Phase 2	C110	Corridor	CPT-1	RB-2					
Phase 2	C210	Corridor	CPT-1	RB-2					
Phase 2	C240	Corridor	CPT-1	RB-2					
Phase 2	C250	Corridor	CPT-1	RB-2					

Lowell Street Renovations
15 Lowell Street, Portland, Maine 04101

#	Date	Description
		Revision Schedule

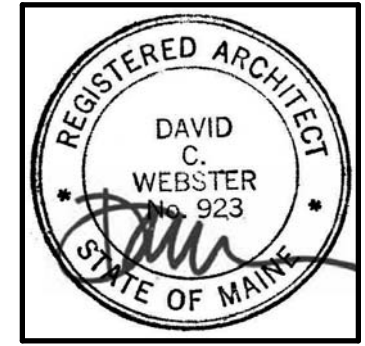

JOB NO.
16064

DRWN: CHK
Author Checker

SCALE:

ISSUE:
Permit Set

September 7, 2017

TITLE:
Level 2 - Finish Plan

SHEET

AF102