INTERIOR FIT-UP SCHEDULE

RM NO.	ROOM NAME	WALLS	DOOR FRAMES	FLOOR	BASE	CEILING	CASEWORK	DOOR NO.	DOOR	DOOR HARDWARE	REMARKS
100	NEW OFFICE	P1	P2	CPT1	MATCH EXISTING WOOD	EXISTING TO REMAIN	N/A		3'-0" x 7'-0"; MATCH EXISTING	OFFICE FUNCTION	SKIM COAT EXISTING TILE FLOOR PRIOR TO CARPET INSTALLATION.
101	WAITING ROOM	P1	P2	EXIST/CPT1	VB1	PATCH /MATCH EXISTING	N/A	N/A	N/A	--	REMOVE EXISTING TILE/PREP FLOOR PRIOR TO CARPET INSTALLATION.
102	FILE/KITCHEN ALCOVE	P1	N/A	EXISTING	VB1/EXIST	PATCH /MATCH EXISTING	1) FILE CABINETS & COUNTERTOPS BY OWNER. 2) PLAM1 @ KITCHENETTE COUNTERTOP.	N/A	N/A	N/A	VB1 TO TERMINATE AT INSIDE CORNER ON FILE WALL, TYPICAL BOTH SIDES.
103	RECEPTION	P1	P2	EXISTING	EXIST	EXISTING TO REMAIN	N/A	N/A	N/A	N/A	
104	LASIK EXAM	MATCH EXIST	P2	EXISTING	MATCH EXIST	EXISTING TO REMAIN	REMOVE EXISTING REFRESHMENT CABINET	N/A	N/A	N/A	CHANGE DOOR SWING
105	FILE STORAGE	MATCH EXIST	MATCH EXIST	CPT1	VB1	SAT-1	N/A	N/A	N/A	N/A	N/A
106	OPTICAL SHOP	VWC-B	N/A	CPT2	VB2	EXISTING TO REMAIN	N/A	N/A	N/A	N/A	--
107	LOBBY CORRIDOR	VWC-A VWC-B VWC-C	P1/P2	EXISTING	VB2	MATCH EXISTING	N/A	N/A	N/A	N/A	1. REFINISH ALL WOOD DOORS, SAND & CLEAR FINISH. 2. APPLY FROSTED GLASS FILM @ SIDELIGHT ADJ. TO FILE STORAGE RM. 105
108	INFORMATION	VWC-C	N/A	CPT2	VB2	MATCH EXISTING @ LOBBY	INFORMATION DESK; REFER TO DRAWINGS	N/A	N/A	N/A	--
109	PHONE TRIAGE	P1	P1	CPT1	VB1	SAT-1	RE-USE EXISTING COMPONENTS; REFER TO DRAWINGS.	N/A	N/A	N/A	EXISTING CEILING LIGHTS TO REMAIN.

MATERIAL LEGEND

MATERIAL	CODE	MANUFACTURER	COLOR/STYLE	NO.	REMARKS
PAINT	P-1	SHERWIN WILLIAMS	Grassland	6163	
	P-2	SHERWIN WILLIAMS	TBD	TBD	
	SP-3	WOLF GORDON	Solid Metal	SM728	Spray application at elevator door & frame. Refer to drawings.
VINYL WALLCOVERING	VWC-A	INNOVATIONS Style: Woven Wood - 36" wide	Natural	WWS003	VWC-A/B/C has been purchased by owner. Contractor to confirm quantity required. Work to include existing paper removal, wall prep and installation of new vinyl wallcovering (FBO).
	VWC-B	WOLF GORDON Style: Network Plait - 54" wide	NWK7	5468	
	VWC-C	D. L COUCH Style: Orbit	Q24 - Evolutionary Green	217	
CARPET	CPT1	SHAW	Auditorium	60510	BACKING: Match existing
		STYLE: Pep Rally Teklok ®			
		STYLE NUMBER: 60460			
	CPT2	SHAW	Silver Sage	93511	Backing: Ultraloc ®
		STYLE: Double Knit upat			
		STYLE NUMBER: 5A093			
VINYL WALL BASE	VB1	JOHNSONITE	Fawn	80	
	VB2	JOHNSONITE "Millwork"	Natural Maple	NMP	
		Profile: Silhouette - MW-XX-JW Quarter Round Accessory Piece: QTR-XX-A	Natural Maple	NMP	VB2 has been purchased by owner. Contractor to confirm quantity required. Work to include removal of existing base, wall prep for new base and installation of new base (FBO).
PLASTIC LAMINATE	PLAM1	PIONITE	Slate Impression	AV741	
	PLAM2	PIONITE	Gateway to the Future	AV100	
	PLAM3	WILSONART	Xanadu	7945-07	

LEGEND:

P-PAINT SP - SPECIAL PAINT CPT - CARPET VB - VINYL BASE PLAM - PLASTIC LAMINATE VWC - VINYL WALLCOVERING

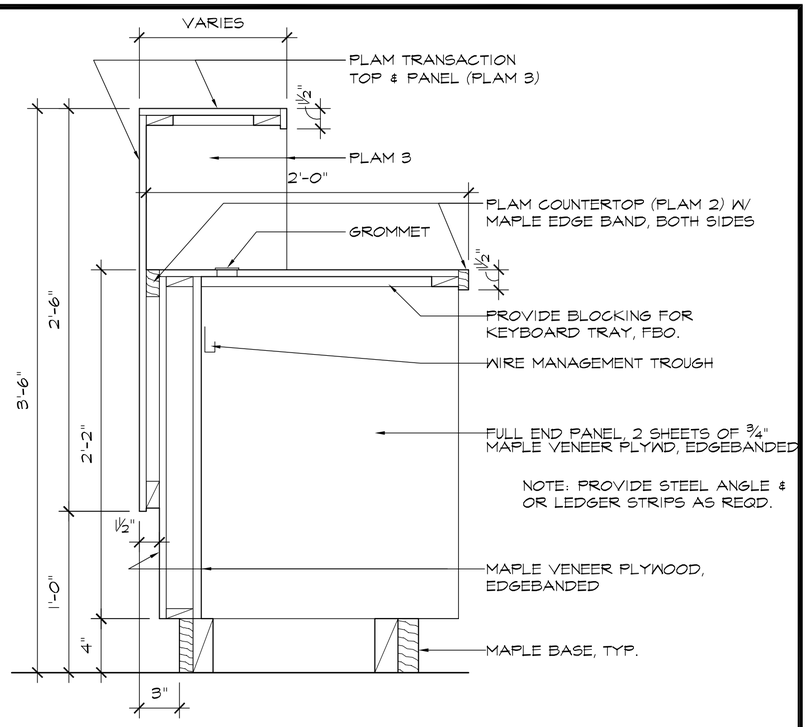

5 SECTION @ INFORMATION DESK
1 1/2"=1'-0"

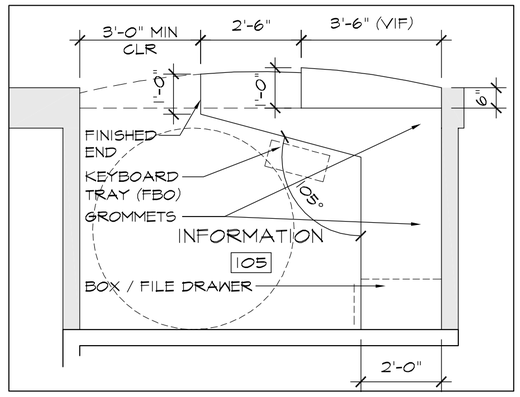

4 PLAN AT INFO DESK
3/8"=1'-0"

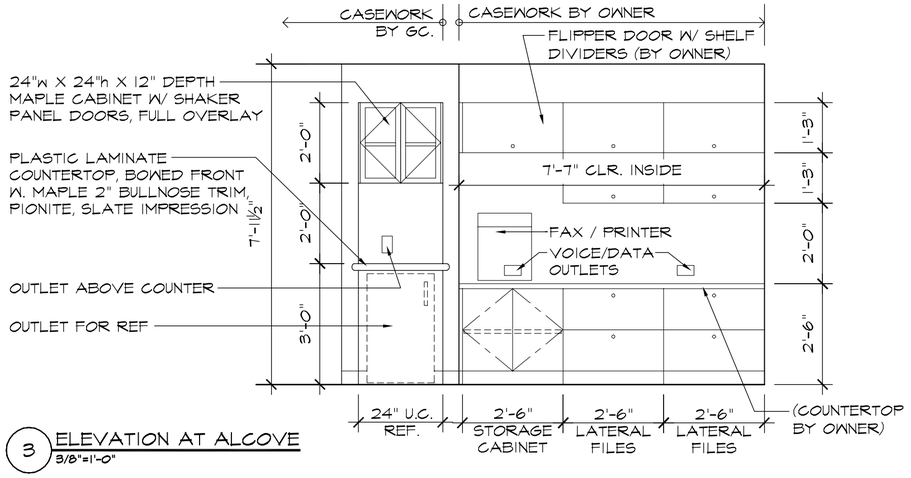

3 ELEVATION AT ALCOVE
3/8"=1'-0"

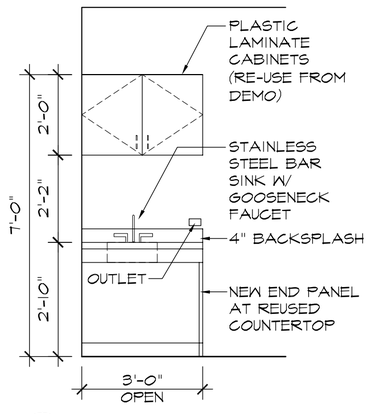

2 PHONE TRIAGE / KITCH
3/8"=1'-0"

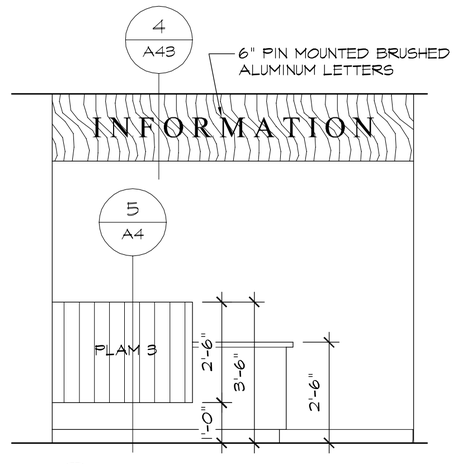

1 INFORMATION
3/8"=1'-0"

PDT ARCHITECTS
49 DARTMOUTH STREET
PORTLAND, MAINE 04101
207-775-1059
www.pdtarchs.com

COPYRIGHT 2008
PDT Architects
Reuse or reproduction of the contents of this document is not permitted without written permission of PDT Architects.

Maine Eye Center
Lasik/Lobby Renovations
PORTLAND, MAINE

JOB NO.
08-046

DRWN. CHK
AJR

SCALE:
AS NOTED

ISSUE
09 JUNE 2008

TITLE
FINISH SCHEDULE, ELEVATIONS & DETAILS

SHEET
A4

Jun 27, 2008 - 11:30am

H:\Master Proj Files2\Maine Eye Center\Maine Eye Center -1stFloor 2008\MEC-PLAN.dwg