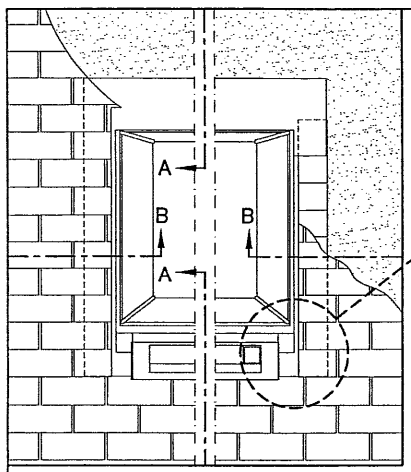

ELEVATION

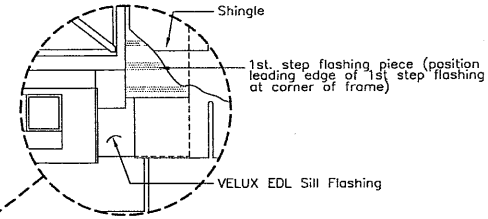

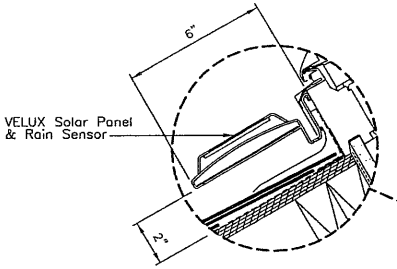

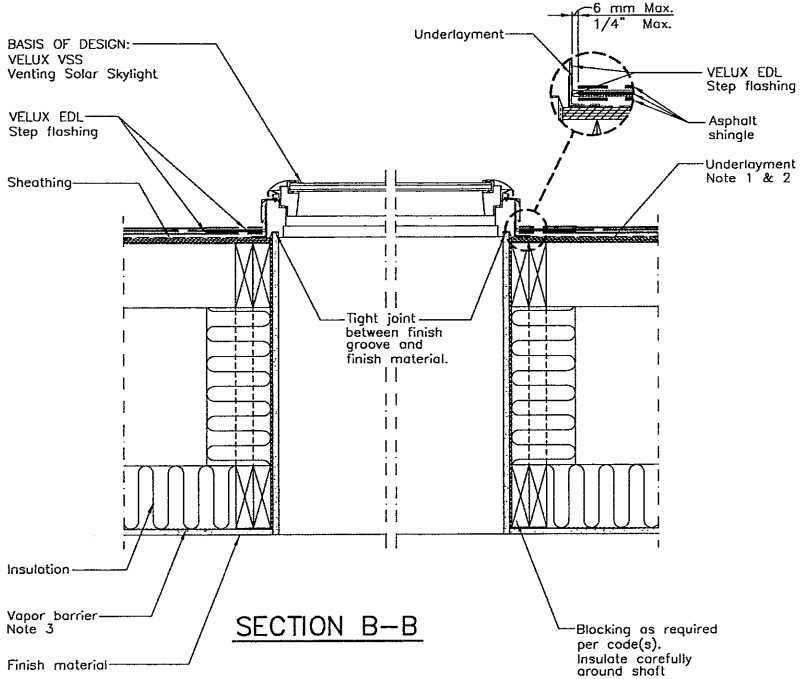

SECTION B–B

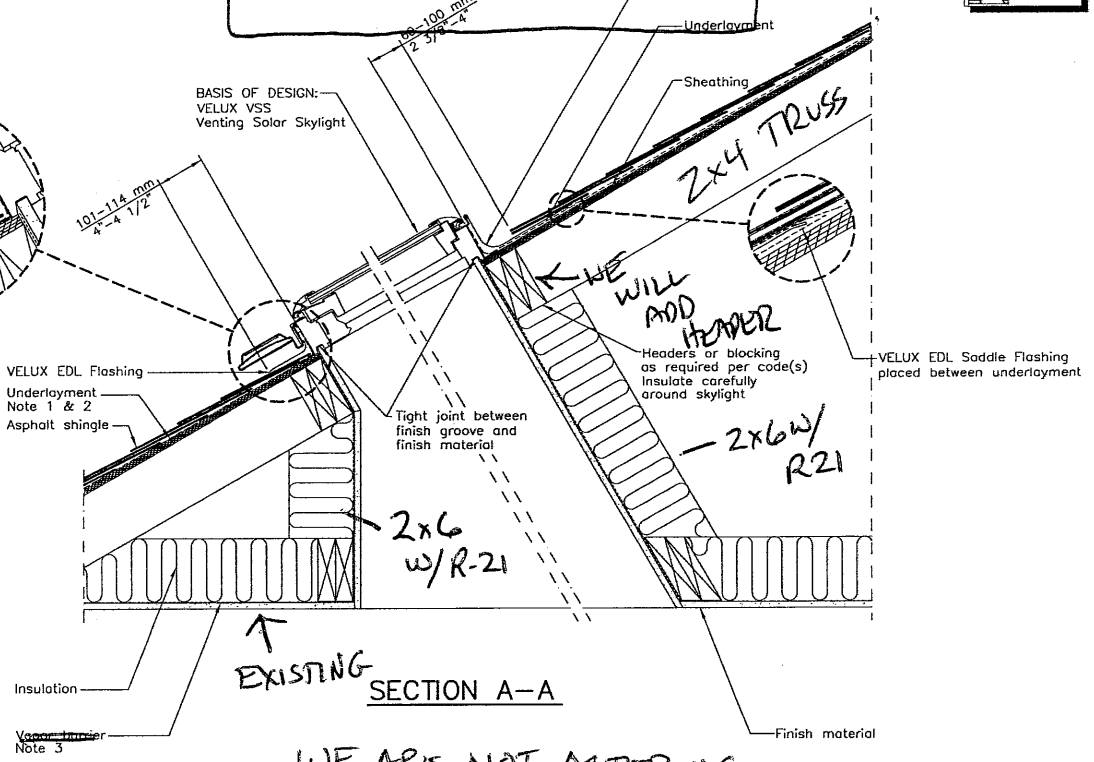

SECTION A–A

WE ARE NOT ALTERING TRUSSES AT ALL. SKYLIGHTS ARE 21½ WIDE AND WILL FIT BETWEEN

GENERAL NOTES

1. Wrap frame in ZOZ 216 adhesive underlayment provided with VELUX flashing.
2. Underlayment to be folded up against all sides of skylight.
3. Vapor barrier should be used to avoid moisture.

VSS
EDL
Asphalt shingles
Light shaft

VELUX	VELUX 1418 Evans Pond Road Greenwood, SC 29649 1–800–88–VELUX www.VELUXUSA.com
Sky–Product Management	

	Name	Date
Drawn by	JDH	April 2013
Checked by	WQ, JL	April 2013
Drawing No.		

VSS–Residential/Commercial Roof Section (Light Shaft and Asphalt Shingles)

VSS–02–040813

This drawing is an instrument of service and is provided for informational use only.

© 2013 VELUX GROUP

® VELUX is a registered trademark