



The Green Solution

Inline 4" Floor Drain Trap Sealer Model SS4009




Specification: Sure Seal Model SS4009 preassembled Inline Floor Drain Trap Sealer. 2 pieces: 1 commercial grade ABS plastic housing & proprietary neoprene rubber diaphragm with 1 soft rubber sealing gaskets. Floor rating ASSE – 1072 AF-GW.

Function: Inline 4" Floor Drain Trap Sealer. Creates a physical barrier to block sewer gases and their odors from escaping. Can be used in either the strainer or in the floor drain outlet.


- **New Construction:** Used in floor drains to provide added protection against escaping sewer gases. Can be used in either the strainer or in the floor drain outlet. Eliminates the need to repair/replace trap primers when they fail.
- **Retrofit:** Used in situations where trap primers have failed or where trap primers were never installed.

Benefits: Simple to install, eliminates the need for complex, time consuming, and expensive repairs. Provides added protection against noxious sewer gasses. ECO friendly saving water.

ICC-ES Listed: PMG-1070 IAPMO Listed: C-4165 Patents: US 6,273,124 B1 • CA 2,450,304 • Other Patents Pending

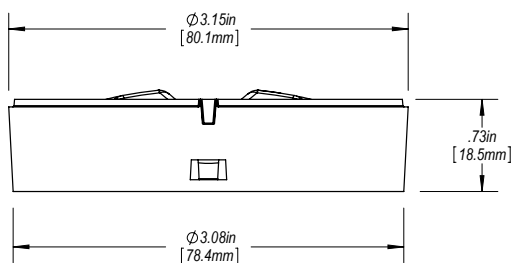

Housing (No Gasket)

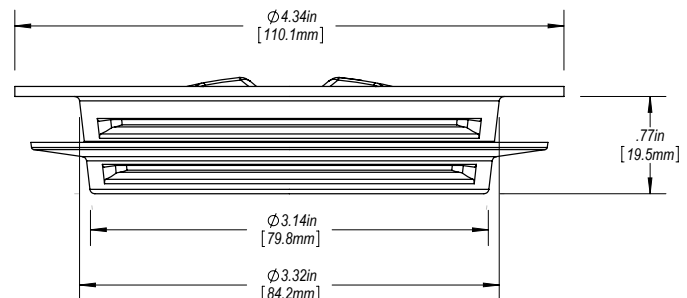

Housing & Gasket