

DOOR SCHEDULE

MARK	TYPE	SIZE	THK.	F.R.	HDWE SET	REMARKS
01	EXTERIOR INSULATED ENTRY	3'-0" x 6'-8"	1 3/4"	-	PRIVACY, DEADBOLT	
02	EXTERIOR INSULATED ENTRY	3'-0" x 6'-8"	1 3/4"	-	PRIVACY, DEADBOLT	
03	INSULATED OVERHEAD GARAGE	9'-0" x 7'-0"	2"	-	MFR HDWRE	
04	INSULATED OVERHEAD GARAGE	9'-0" x 7'-0"	2"	-	MFR HDWRE	
06	INSULATED OVERHEAD GARAGE	8'-0" x 7'-0"	2"	-	MFR HDWRE	
07	EXTERIOR INSULATED ENTRY	3'-0" x 6'-8"	1 3/4"	-	PRIVACY, DEADBOLT	
07	EXTERIOR INSULATED GARAGE	2'-8" x 6'-8"	1 3/4"	20 MIN	PRIVACY, EXTERIOR KETCHUCK	MINIMUM 1 3/8" THICK SOLID WOOD OR 1 3/8" HONEYCOMB CORE STEEL DOOR OR 20 MINUTE FIRE RATED DOOR. SEE NOTE 14/DWG NO
07A	EXTERIOR GLASS SLIDERS	8'-0" x 6'-8"	-	-	PASSAGE, THRESH LOCK	ANDERSEN FRENCHWOOD 400 SERIES; FIBERGLASS EXTERIOR, PRE-PRIMED WOOD INTERIOR
08	EXTERIOR GLASS SLIDERS	8'-0" x 6'-8"	-	-	PASSAGE, THRESH LOCK	MINIMUM 1 3/8" THICK SOLID WOOD OR 1 3/8" HONEYCOMB CORE STEEL DOOR OR 20 MINUTE FIRE RATED DOOR. SEE NOTE 14/DWG NO
09	GARAGE INSULATED ENTRY	3'-0" x 6'-8"	1 3/4"	20 MIN	PRIVACY, EXTERIOR KETCHUCK	
10	INTERIOR SC WOOD PANEL	2'-0" x 6'-8"	-	-	PASSAGE	
11	INTERIOR SC WOOD PANEL	2'-6" x 6'-8"	-	-	PASSAGE	
12	INTERIOR SC WOOD PANEL	2'-6" x 6'-8"	-	-	PASSAGE	
13	INTERIOR SC WOOD PANEL	2'-6" x 6'-8"	-	-	PASSAGE	
14	INTERIOR SC WOOD PANEL	2'-6" x 6'-8"	-	-	PASSAGE	
15	INTERIOR BI FOLD	6'-0" x 6'-8"	-	-	MFR HDWRE	
16	INTERIOR SC WOOD PANEL	1'-6" x 6'-8"	-	-	PASSAGE	
17	INTERIOR SC WOOD PANEL	2'-6" x 6'-8"	-	-	PASSAGE	
18	INTERIOR SC WOOD PANEL	2'-6" x 6'-8"	-	-	PASSAGE	
19	INTERIOR SC WOOD PANEL	2'-8" x 6'-8"	-	-	PRIVACY	
20	INTERIOR SC WOOD PANEL	2'-8" x 6'-8"	-	-	PRIVACY	
21	INTERIOR SC WOOD PANEL	2'-6" x 6'-8"	-	-	PRIVACY	
22	INTERIOR SC WOOD PANEL	2'-4" x 6'-8"	-	-	PASSAGE	
23	INTERIOR SC WOOD PANEL	2'-8" x 6'-8"	-	-	PRIVACY	
24	INTERIOR SC WOOD PANEL	2'-4" x 6'-8"	-	-	PASSAGE	
25	INTERIOR SC WOOD GLIDING	3'-0" x 6'-8"	-	-	MFR HDWRE	
26	INTERIOR SC WOOD GLIDING	2'-6" x 6'-8"	-	-	PRIVACY	
30	INTERIOR WOOD INSUL PANEL	3'-0" x 6'-8"	1 3/4"	-	PRIVACY, KEY LOCK	SELF CLOSING DOOR WITH LATCH
31	INTERIOR SC WOOD PANEL	3'-0" x 6'-8"	1 3/4"	-	PRIVACY, KEY LOCK	

NOTES


- SPECIFIC SELECTION OF DOOR TYPES, MATERIAL, THICKNESS, VENEER, GLAZING, HINGERS, LEVER HANDLES/KNOBS, TRIM AND OTHER RELATED DOOR HARDWARE SELECTED BY OWNER/GC.
- ZONE 6 OPAQUE DOOR U-FACTOR MUST BE 0.37 OR LESS.

WINDOW SCHEDULE

MARK	TYPE	MODEL NO.	EGRESS	UNIT DIMENSIONS W X H	ROUGH OPENING (MIN)	REMARKS
A	MULLED PAIR DOUBLE HUNG	TW 30410-2	NO	6'-5 1/4" X 5'-0 7/8"	6'-6 1/4" X 5'-0 7/8"	CENTRAL ROUGH OPENING DIMENSION WITH MALLED PAIR WITH WINDOW MFR
B	DOUBLE HUNG	TW 3446	YES	3'-5 5/8" X 4'-8 7/8"	3'-6 1/8" X 4'-8 7/8"	
C	MULLED TRIPLE DOUBLE HUNG	TW 34410-3	NO	10'-8 7/8" X 5'-0 7/8"	10'-10 5/8" X 5'-0 7/8"	CENTRAL ROUGH OPENING DIMENSION WITH FOR MULLED TRIPLE WITH WINDOW MFR
D	DOUBLE HUNG	TW 34410	YES	3'-5 5/8" X 5'-0 7/8"	3'-2 1/8" X 5'-0 7/8"	
E	DOUBLE HUNG	TW 30410	YES	3'-1 5/8" X 5'-0 7/8"	3'-2 1/8" X 5'-0 7/8"	
F	DOUBLE HUNG	TW 2032	NO	2'-1 5/8" X 3'-4 7/8"	2'-2 1/8" X 3'-4 7/8"	
G	GLIDING MULLED HUNG	633 W/ FIXED CENTER PANE	NO	5'-0" X 3'-0" (SEE REMARKS)	MFR PRORWE	PROVIDE GLIDING END UNITS WITH CENTER FIXED PANE-EQUAL PANES. ROUGH OPENING DIMENSIONS PROVIDED BY WINDOW MFR
H	DOUBLE HUNG	TW 20210	NO	2'-1 5/8" X 3'-0 7/8"	2'-2 1/8" X 3'-0 7/8"	
J	DOUBLE HUNG	TW 2436	NO	2'-5 5/8" X 3'-8 7/8"	2'-6 1/8" X 3'-8 7/8"	
K	MULLED DOUBLE DOUBLE HUNG	TW 34410-2	YES	7'-1 1/4" X 5'-0 7/8"	7'-2 1/4" X 5'-0 7/8"	CENTRAL ROUGH OPENING DIMENSION WITH FOR MULLED DOUBLE WITH WINDOW MFR
L	DOUBLE HUNG	TW 24410	NO	2'-5 5/8" X 5'-0 7/8"	2'-6 1/8" X 5'-0 7/8"	

NOTES

- WINDOW SCHEDULE BASED ON ANDERSEN 400 SERIES TILT-WASH DOUBLE HUNG AND 400 SERIES GLIDING WINDOWS, WOOD INTERIOR AND VINYL EXTERIOR. OWNER SELECT EXTERIOR COLOR AND INTERIOR PRE-PRIMED FINISH.
- SPECIFIC SELECTION OF WINDOW TYPES, MATERIAL, THICKNESS, VENEER, GLAZING, HARDWARE, TRIM AND OTHER RELATED ITEMS SELECTED BY OWNER/GC.
- ALL WINDOWS SHALL BE SILL PAN FLASHED, TYPICAL. CONSULT WINDOW MFR FOR RECOMMENDED MATERIALS AND TECHNIQUES.
- MINIMUM ROUGH OPENING DIMENSIONS MAY NEED TO BE INCREASED TO ALLOW FOR USE OF BUILDING WRAPS, SILL PANNING, BRACKETS, FASTENERS OR OTHER ITEMS. (CONSULT MFR, TYP.)
- EGRESS WINDOWS SHALL MEET OR EXCEED CLEAR OPENING AREA OF 5.7 SQUARE FEET CLEAR OPENING WIDTH OF 20" MIN. AND CLEAR OPENING HEIGHT OF 24" MIN.
- ZONE 6 FENESTRATION U-FACTOR FOR WINDOWS MUST BE 0.35 OR LESS.

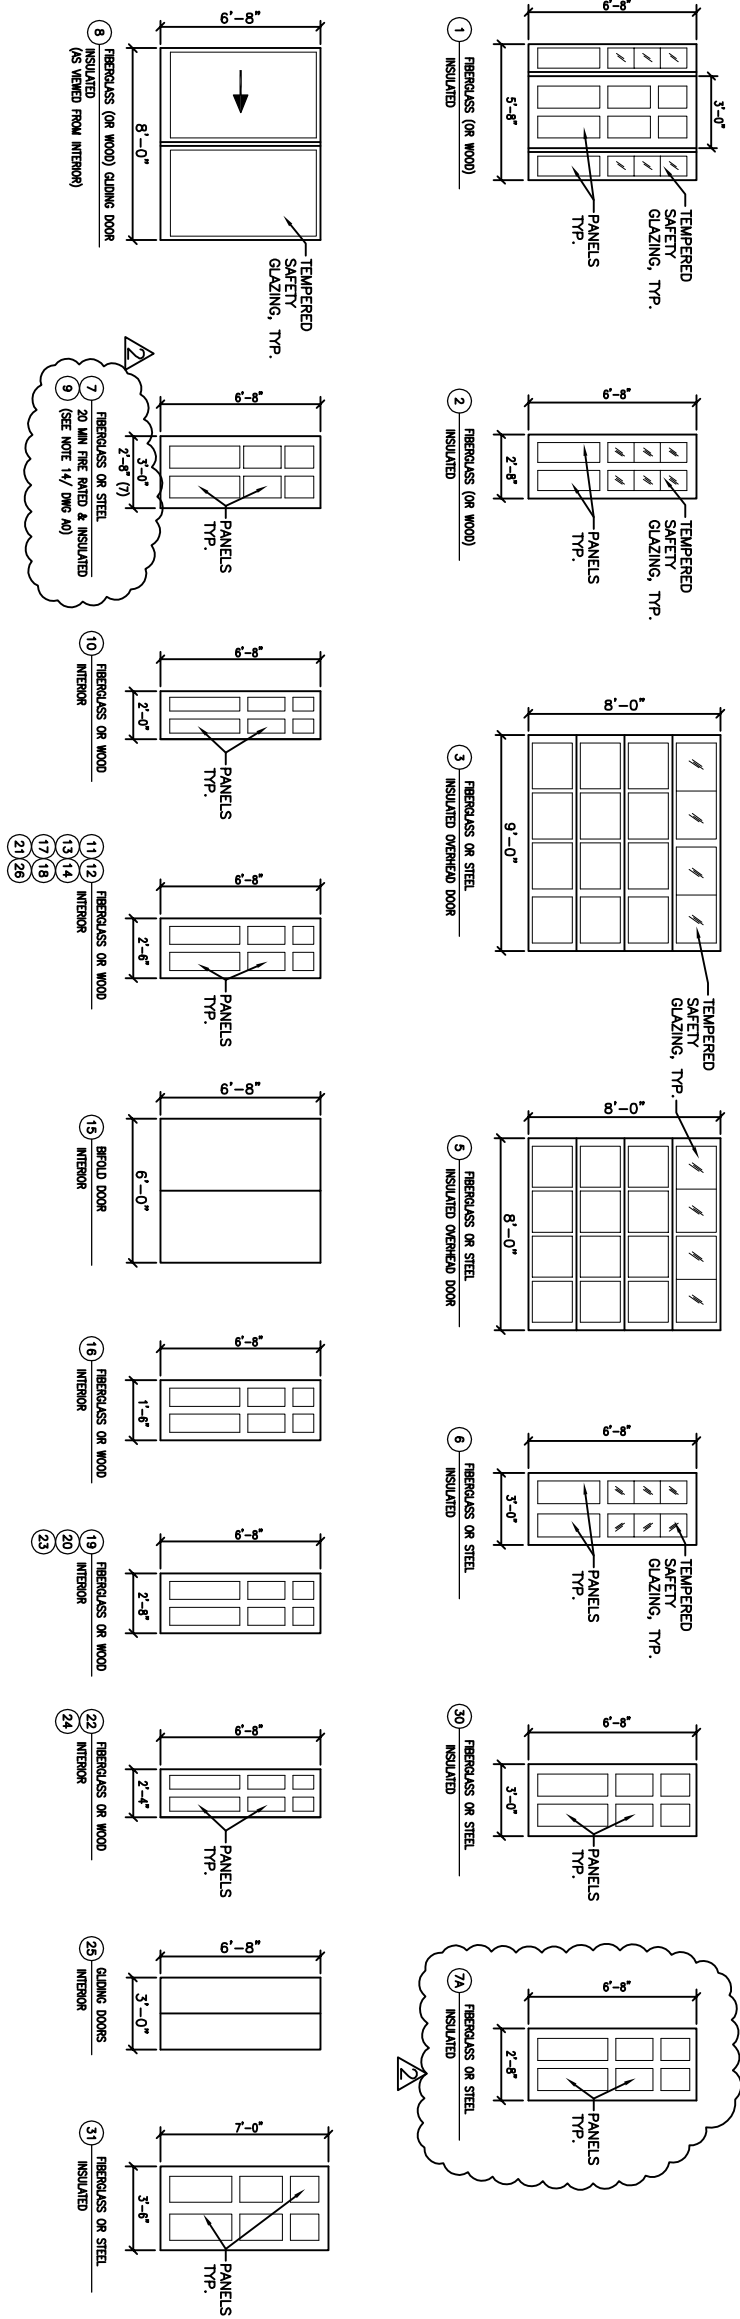

MICHAEL & MARY ANN JIMINO RESIDENCE
 1651 WASHINGTON AVENUE
 PORTLAND, MAINE
 DOOR AND WINDOW SCHEDULES

JOHN H. LEASURE ARCHITECT, INC.
 6 Q STREET
 SOUTH PORTLAND, MAINE 04106



REV.	DATE	STATUS
0	3-28-16	PERMIT SUBMISSION
1	4-15-16	REV 1
2	5-5-16	REV 2

