








KEN SODDY
34 MEADOW LN.
PORTLAND

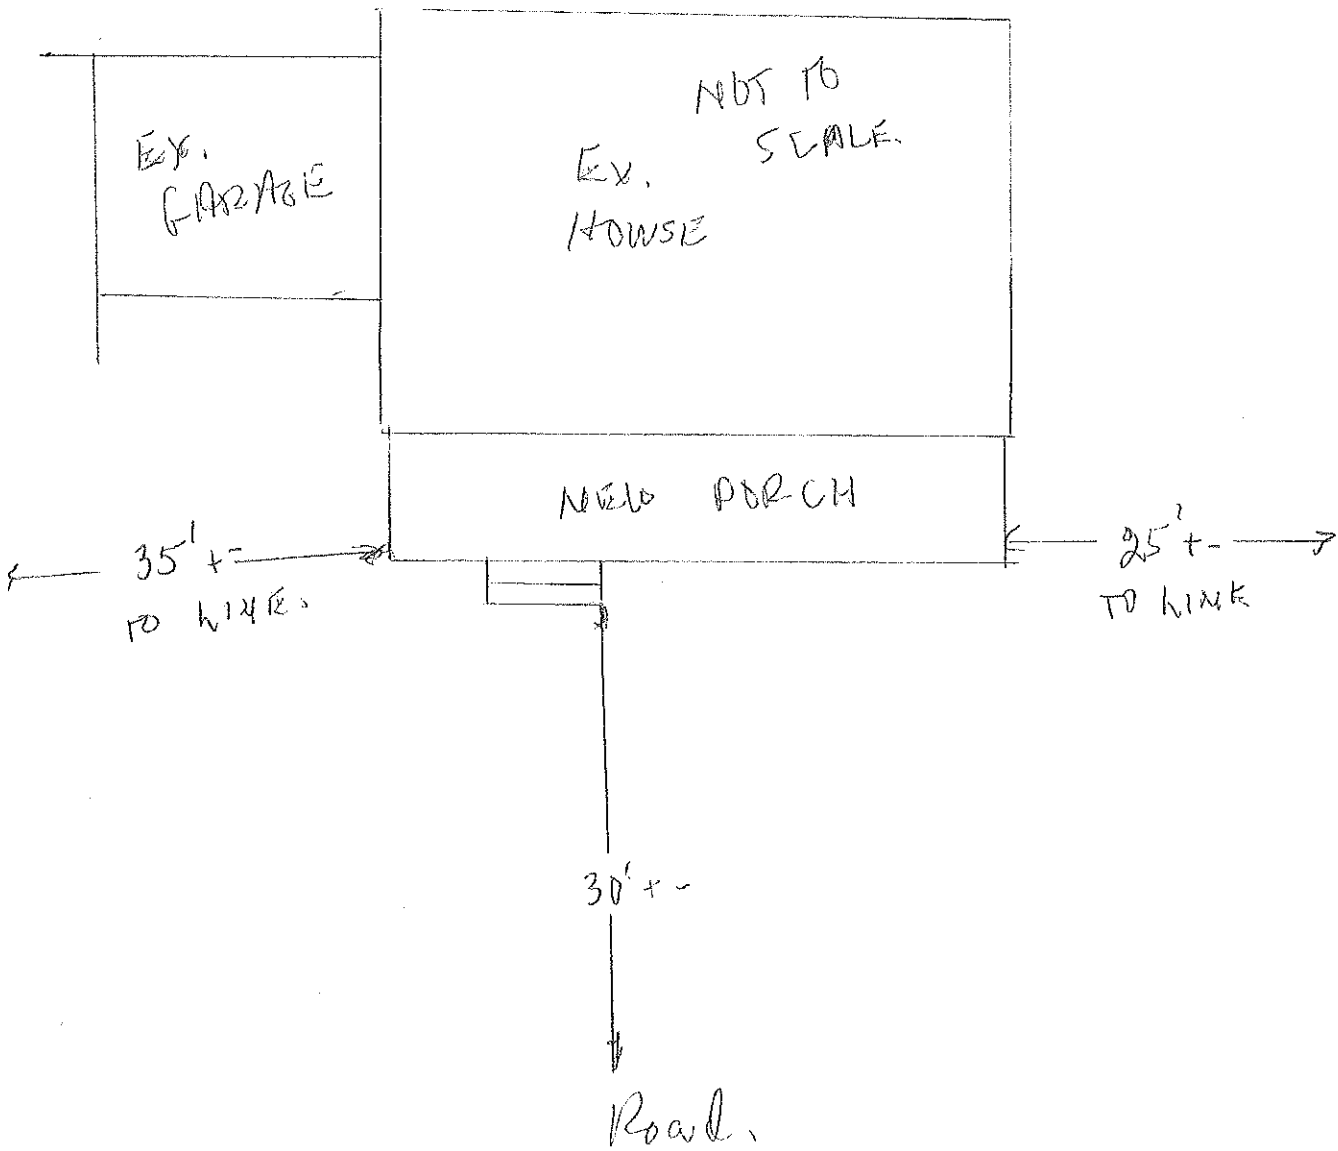

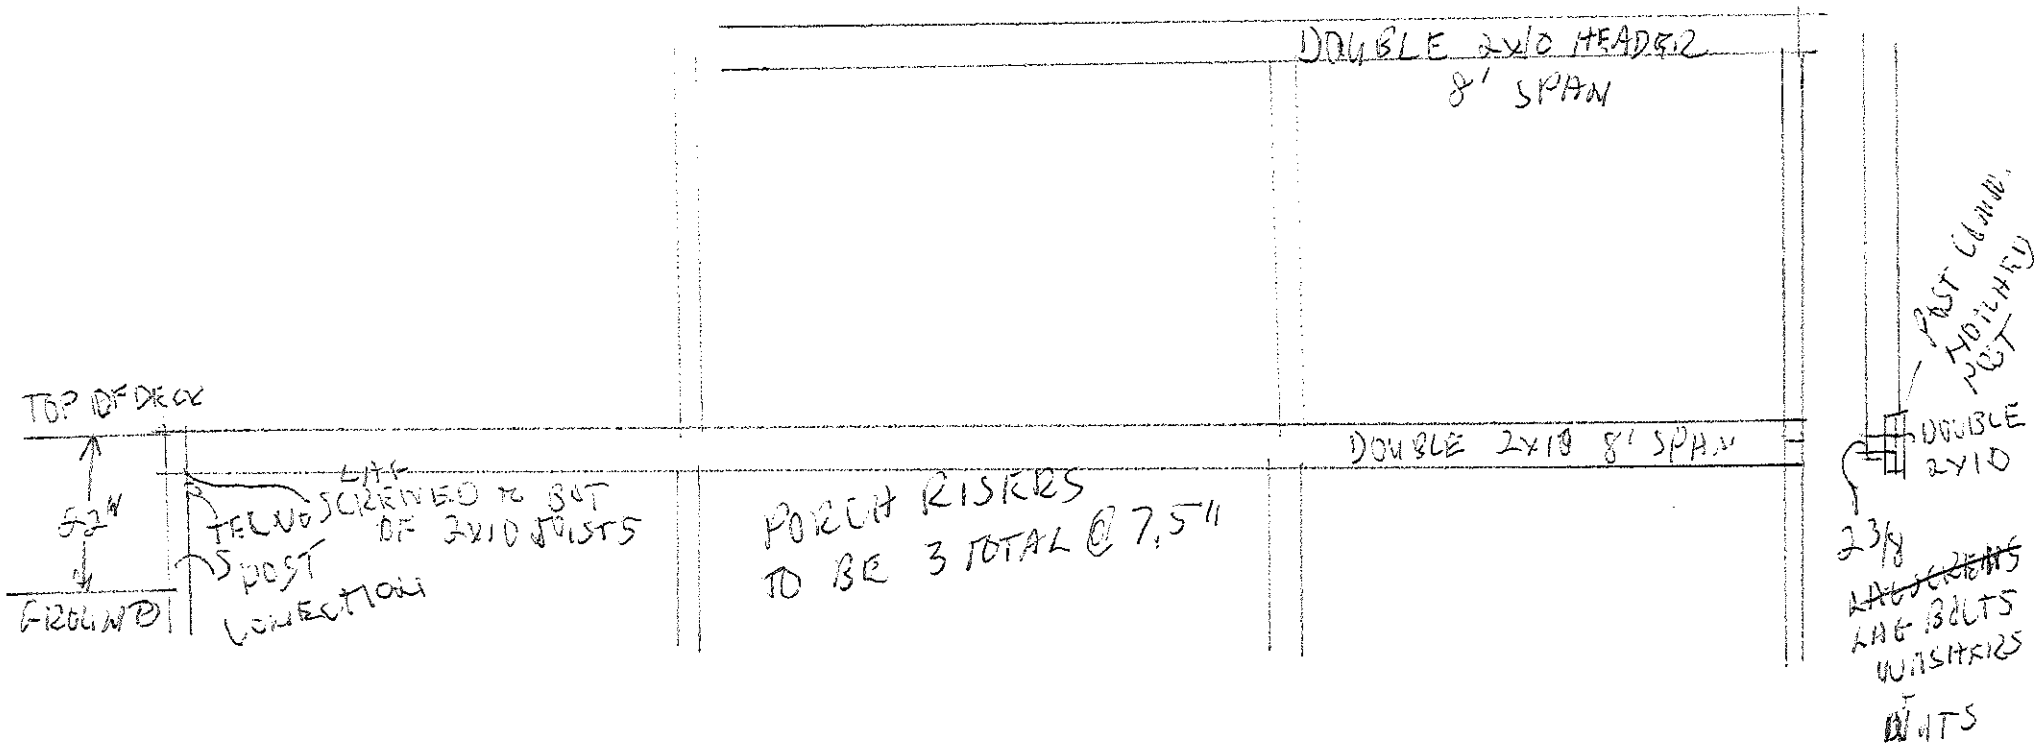

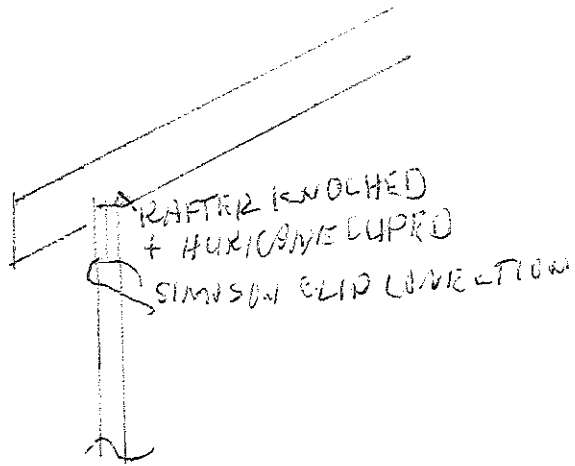

Reviewed for Code Compliance
 Permitting and Inspections Department
 Approved with Conditions
 03/15/2019

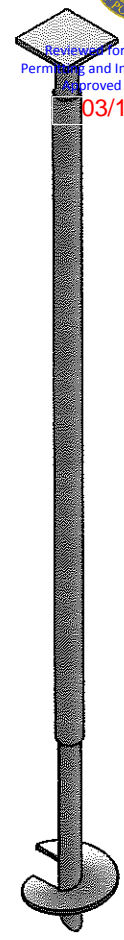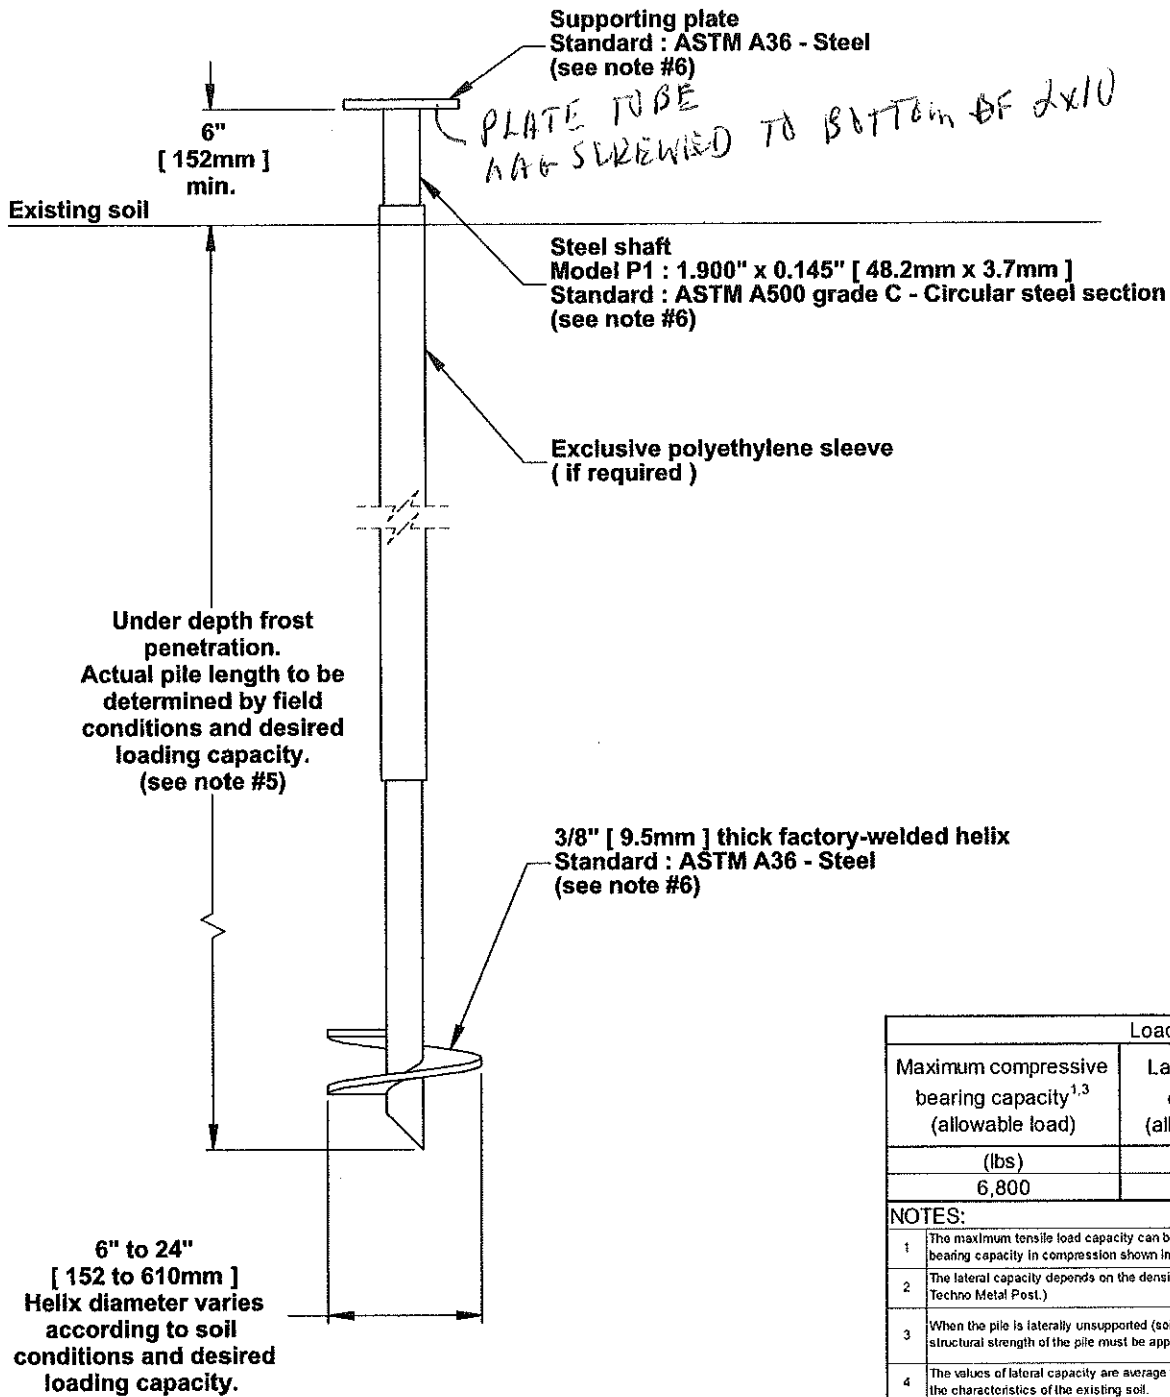

Load Capacity		
Maximum compressive bearing capacity ^{1,3} (allowable load)	Lateral bearing capacity ^{2,4} (allowable load)	Factored bending resistance (ultimate load)
(lbs)	(lbs)	(lbs. ft)
6,800	225	1,010

- NOTES:
- The maximum tensile load capacity can be obtained, conservatively, by halving the values of the bearing capacity in compression shown in the selection table.
 - The lateral capacity depends on the density of soil (to validate consult technical department of Techno Metal Post.)
 - When the pile is laterally unsupported (soil very loose / soft, liquefiable soils, water and air), the structural strength of the pile must be approved by the technical department of Techno Metal Post.
 - The values of lateral capacity are average values and can be modified, more or less, depending on the characteristics of the existing soil.
 - If required, piles may be field welded with extensions to achieve greater loading capacities in poor soil conditions.
 - If required, the helical pile and the supporting plate can be galvanized in compliance with standard ASTM A123