ity of Portland, Maine – Building or Use Permit Application	389 Congress Street, 04101, Tel: (207) 874-8703, FAX: 874-8716
---	--

ocation of Construction:	Owner: Bruce & Mary Hute	:hingon	Phone: (207) 797-3049	Permit Ne 9 9 0 4 1 7
Owner Address: 135 Lester Drive	Lessee/Buyer's Name:	Phone:	BusinessName:	PERMIT ISSUED
Contractor Name: Dave's Pool	Address: 690 Main Street, Westb		5006	Permit Issued: MAY 4 999
Past Use: Single family	Proposed Use:	\$ 3,000,00		
		FIRE DEPT. □ A	Approved INSPECTION: Ay Use Group Typ	Zone: CBL: 384-A-020
Proposed Project Description:		Signature:	Signature	Zoning/Approval:
installing an above ground pool WM Royald 88	3-3653	Action:	CTIVITIES DISTRICT (P.K.) Approved Approved with Conditions: Denied	Special Zone or Reviews: Shoreland Wetland Flood Zone
~		Signature:	Date:	☐ Subdivision
Permit Taken By:	Date Applied For: 04/30/99			☐ Site Plan maj ☐minor ☐mm ☐ Zoning Appeal
 Building permits do not include plumbing, sep Building permits are void if work is not started tion may invalidate a building permit and stop 	within six (6) months of the date of		PERMIT ISSUED TH REQUIREMENTS	☐ Conditional Use ☐ Interpretation ☐ Approved ☐ Denied Historic Preservation Not in District or Landmark ☐ Does Not Require Review ☐ Requires Review
				Action:
I hereby certify that I am the owner of record of the authorized by the owner to make this application as if a permit for work described in the application is areas covered by such permit at any reasonable how	s his authorized agent and I agree to ssued, I certify that the code officia	o conform to all applicable I's authorized representati	e laws of this jurisdiction. In adve shall have the authority to en	dition, Denied
		04/30/99		
SIGNATURE OF APPLICANT	ADDRESS:	DATE:	PHONE:	
RESPONSIBLE PERSON IN CHARGE OF WORK	, TITLE		PHONE:	CEO DISTRICT 2
	mit Desk Green-Assessor's C	Canary-D.P.W. Pink-Pu		

BUILDING PERMIT REPORT
DATE: 3MAY 1999 ADDRESS: 135 Les Ter Drive CBL: 384-A-B29
REASON FOR PERMIT: TO INSTAIL above ground pool
BUILDING OWNER: B. & M. Hutchin 507.
PERMIT APPLICANT: Dave's Pool Contractor 11 /
USE GROUP U BOCA 1996 CONSTRUCTION TYPE A/G. POOL
·

CONDITION(S) OF APPROVAL

This permit is being issued with the understanding that the following conditions are met:

Approved with the following conditions: This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.

Before concrete for foundation is placed, approvals from the Development Review Coordinates and Inspection Services must be obtained.

(A 24 hour notice is required prior to inspection) 3. Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. The thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the

top of the drain is not less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, and shall be covered with not less than 6" of the same material. Section 1813.5.2 Foundations anchors shall be a minimum of 12" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and 4. a maximum 6' o.c. between bolts. (Section 2305.17)

Waterproofing and damp proofing shall be done in accordance with Section 1813.0 of the building code. ð. Precaution must be taken to protect concrete from freezing. Section 1908.0

It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify 7. that the proper setbacks are maintained. 8. Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than 1-hour fire resisting rating. Private garages attached side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of 1/2 inch gypsum board or the equivalent applied to the garage means of 1/2 inch gypsum board or the equivalent applied to the

All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National 9. Mechanical Code/1993). Chapter 12 & NFPA 211 Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building 10.

Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces 11. for the purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", except Use Group R which is 36". In occupancies in Use Group A, B, H-4, I-1, I-2, M and R and public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handrails shall be a minimum of 3e4" but not more than 38". Use Group R-3 shall not be less than 30", but not more than 38".) Handrail grip size shall have a circular cross section with an outside diameter of at least 1 1/4" and not greater than 2". (Sections 1021 & 1022.0) - Handrails shall be on both sides of stairway. (Section 1014.7)

Stair construction in Use Group R-3 & R-4is a minimum of 10" tread and 7 %" maximum rise. All other Use Group minimum 11"

Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits

tread, 7" maximum rise. (Section 1014.0) The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4 14.

Headroom in habitable space is a minimum of 76". (Section 1204.0)

12.

13.

16.

garage side. (Chapter 4, Section 407.0 of the BOCA/1996)

Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door 15. approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum net clear opening width dimension shall be 20 inches (508mm), and a minimum net clear opening of 5.7 sq. ft. (Section 1018.6)

directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1) All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self 17. closer's. (Over 3 stories in height requirements for fire rating is two (2) hours.) (Section 710.0)

SIGNY Went to site to cheek compliance. No Ladder Pertection - will soid Notice to away of the months of the following the Miles of Last of La

Inspection Record

Date

Type

Foundation: _____ Framing: _____ Plumbing: ____ Final: _____ Other: _____

The boiler shall be protected by enclosing with (1)hour fire rated construction including fire doors and ceiling, or by providing automatic 18. extinguishment. (Table 302.1.1)

All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of 19. the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1996), and NFPA 101 Chapter 18 &19. (Smoke detectors shall be installed and maintained at the following locations):

In the immediate vicinity of bedrooms

In all bedrooms In each story within a dwelling unit, including basements

In addition to the required AC primary power source, required smoke detectors in occupancies in Use Groups R-2, R-3 and I-1 shall receive power from a battery when the AC primary power source is interrupted. (Interconnection is required) Section 920.3.2. 20. A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type. (Section 921.0)

The Fire Alarm System shall maintained to NFPA #72 Standard. 21.

Hoffses, Building Inspector

Marge Schmuckal, Zoning Administrator

Et. McDougall, PFD

24.

25.

32.

PSH 12-14-98

22. The Sprinkler System shall maintained to NFPA #13 Standard. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 23.

of the City's Building Code. (The BOCA National Building Code/1996)
Section 25-135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open

any street or sidewalk from the time of November 15 of each year to April 15 of the following year".

The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification

from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection Services. Ventilation shall meet the requirements of Chapter 12 Sections 1210.0 of the City's Building Code. (Crawl spaces & attics). 26. All electrical, plumbing and HVAC permits must be obtained by a Master Licensed holders of their trade. No closing in of walls until

X 27. all electrical (min. 72 hours notice) and plumbing Inspections have been done.

All requirements must be met before a final Certificate of Occupancy is issued. 28.

All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (the BOCA National Building Code/1996). 29.

Ventilation of spaces within a building shall be done in accordance with the City's Mechanical Code (The BOCA National Mechanical 30. Code/1993). (Chapter M-16) Please read and implement the attached Land Use Zoning report requirements. 31.

Boring, cutting and notching shall be done in accordance with Sections 2305.4.4, 2305.5.1 and 2305.5.3 of the City's Building Code.

Glass and glazing shall meet the requirements of Chapter 24 of the building code.

Theuse Lead a Mache of Swinging pool 33. **/** 34.

35. 36.

**On the basis of plans submitted and conditions placed on these plans any deviations shall require a separate approval.



CITY OF PORTLAND

August 6, 1999

Bruce & Mary Hutchison 135 Lester Dr Portland ME 04103

CBL: 384-A-020

Dear Mr Hutchison:

It was recently noted that your swimming pool was not installed in accordance with Section 421.0 of the 1996 BOCA Code as stipulated in your permit issued May 4, 1999.

The following is a list of violation(s) I recognized in reviewing your pool:

No ladder protection 1.

I will be glad to meet with you on site to fully explain these requirements.

taken. Sincerely,

Please note the failure to contact this office within 10 days will result in legal action being

(Joyl Reed

/sap

Code Enforcement Officer

THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE **PERMIT IS ISSUED**

Building or Use Permit Pre-Application Additions/Alterations/Accessory Structures

To Detached Single Family Dwelling

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE**If you or the property owner owes real estate or personal property taxes or user charges on any property within the

ester

Location/Address of Construction:

City, payment arrangements must be made before permits of any kind are accepted.

Tax Assessor's Chart, Block & Lot Number Owner: Telephone#: 201-190-Block# Owner's Address: Cost Of Work: Lessee/Buyer's Name (If Applicable) \$ 2 Proposed Project Description:(Please be as specific as possible) Rec'd By: Contractor's Name, Address & Telephone

Separate permits are required for Internal & External Plumbing, HVAC and Electrical installation. •All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II. •All plumbing must be conducted in compliance with the State of Maine Plumbing Code. •All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III.

•HVAC(Heating, Ventilation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code. You must Include the following with you application: 1) A Copy of Your Deed or Purchase and Sale Agreement

2) A Copy of your Construction Contract, if available 3) A Plot Plan (Sample Attached) If there is expansion to the structure, a complete plot plan (Site Plan) must include:

is expansion to the structure, a complete plot plan (Site Pian) must include.

The shape and dimension of the lot, all existing buildings (if any), the proposed structure and lifetistages from the actual property lines. Structures include decks porches, a bow windows cantilever sections and roof over structures.

ORTLAND NO. 10.5. pools, garages and any other accessory structures.

Scale and required zoning district setbacks 4) Building Plans (Sample Attached) A complete set of construction drawings showing all of the following elements

Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)

Floor Plans & Elevations Window and door schedules

Foundation plans with required drainage and dampproofing Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas equipment. HVAC equipment (air handling) or other types of work that may require special review must be included.


and that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the codes applicable to this permit

Certification I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record

Signature of applicant: Date: " Building Permit Fee: \$25.00 for the 1st \$1000.cost plus \$5.00 per \$1.000.00 construction cost thereafter. O:\INSP\CORRESP\MNUGENT\APADSFD.WPD

2.

Hutchison 135 Center Dr Portland, me 04103

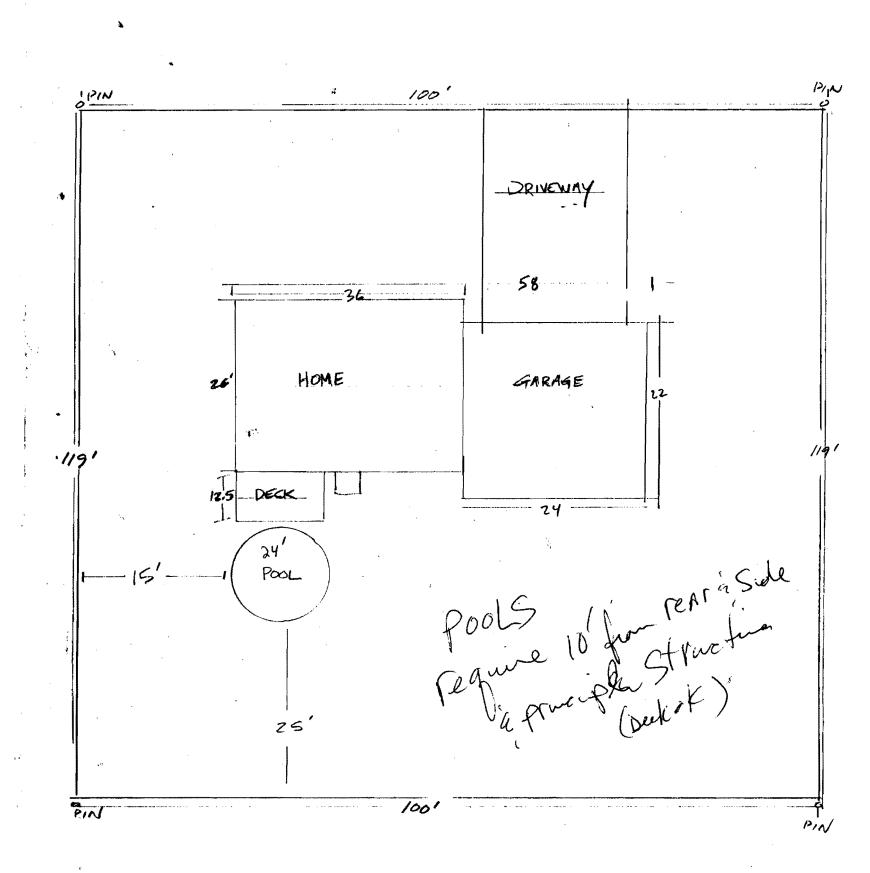



G115-Hot-Dipped Galvanized Alkaline Cleaned

Alkaline Cleaned - Chromic Seal

Enamel painted protective coat
Color Printed Pattern
Crystex®Coat Textured
Weather Sealant

35 Year Limited Warranty First 3 seasons no charge for parts





Swim Play, Inc.

Makers of Fine Above

313 Regina Avenue
Rahway, New Jersey 07065-48
Phone: (732) 574-1500
Fax: (732) 574-1551
www.swimnplay.com
E-mail: info@swimnplay.com

E-mail: info@swimnplay.com

SEBAGO LAKE POOLS

Frost N' Flame
629 Main Street
GORHAM, ME 04038
(207) 856-1000 • (207) 856-7000

