Location of Construction:	Owner:	tion 389 Congress Stree	ne:	Permit Nó:
Owner Address: 108 Crestview Brive 04102	Lessee/Buyer's Name:		378-9046 inessName:	000209
Contractor Name:	Address:	Phone:		Permit Issued:
Past Use:	Proposed Use:	nebunk 04043   985-2		MAR 2 0 2000
Single Family	Same	\$ 11,000.00	PERMIT FEE:	
		FIRE DEPT. □ Approve □ Denied	ed INSPECTION: Use Group: 2-3 Type:	GIY OF PORTLAND
			BOCA99 111	Zone: CBL: 389-C-005
Proposed Project Description:		Signature:	Signature: The Signature	
		Action: Approve	TIES DISTRICT (F.D.)	
Respir Existin	g Deck	Approve	ed with Conditions:	Special Zone or Reviews:
Inclesing Deck	With 14'd 15' 3 Season Sm	Denied		□ □ Wetland *42 × 166
		Signature:	Date:	☐ Flood Zone ☐ Subdivision
Permit Taken By: GD	Date Applied For: GD	March 17,2000		☐ Site Plan maj ☐minor ☐mm □
This permit application does not preclude	tho A - Li (-) f			Zoning Appeal
1 If me me and mor producted		e State and Federal rules.		☐ Variance ☐ Miscellaneous
0.1	•			☐ Conditional Use
<ol> <li>Building permits are void if work is not station may invalidate a building permit and</li> </ol>	arted within six (6) months of the date of	issuance. False informa-		☐ Interpretation
don may invalidate a building perint and	stop an work			☐ Approved☐ Denied
				Historic Preservation
				☐ Not in District or Landmark ☐ Does Not Require Review
			PERMIT ISSUED WITH REQUIREMENT	☐ Requires Review
•			PERMITIONEMENT	S
			WITH REQUIRE.	Action:
Thereby costificated I am the sum of the I	CERTIFICATION			1 🗆 🐧
I hereby certify that I am the owner of record of authorized by the owner to make this application	t the named property, or that the propose	d work is authorized by the owner	of record and that I have be	en
authorized by the owner to make this application if a permit for work described in the application	on as his authorized agent and I agree to	conform to all applicable laws of	f this jurisdiction. In addition	n, Denied
areas covered by such permit at any reasonable	e hour to enforce the provisions of the c	ode(s) applicable to such permit	nave the authority to enter	Date:
		· · · · · · · · · · · · · · · · · · ·		
		March 17,2000		
SIGNATURE OF A DRI LOANT	100000	**************************************		1
SIGNATURE OF APPLICANT	ADDRESS:	DATE:	PHONE:	
SIGNATURE OF APPLICANT RESPONSIBLE PERSON IN CHARGE OF WO		DATE:	PHONE: PHONE:	

#### BUILDING PERMIT REPORT

3 Season Sunra 3 Season Sunra Vindon 's Surroo RMIT FEES: 70.00		USE GROUP: 13-3 CONSTRUCTION TYPE: 59 CONSTRUCTION COST: 1/00.0 PERMIT FEES: 90.0)	PERMIT APPLICANT: CONTRACTOR MADE Windows Surroc	BUILDING OWNER: 13-190 Roggn	REASON FOR PERMIT: Repair dock ENCLOSING dock with 3 Season Su	DATE: SO MARCH 2000 ADDRESS: 108 (resTVIEW DA CBL: 389-C- DOS
--	--	--	--	------------------------------	--	---

The City's Adopted Mechanical Code (The BOCA National Mechanical Code/1993) The City's Adopted Building Code (The BOCA National Building code/1999 with City Amendments)

#### CONDITION(S) OF APPROVAL

This permit is being issued with the understanding that the following conditions are met: 436 787

This permit does not excuse the applicant from meeting applicable State and Federal rules and laws.

Before concrete for foundation is placed, approvals from the Development Review Coordinator and Inspection Services must be obtained. (A 24 hour notice is required prior to inspection) "ALL LOT LINES SHALL BE CLEARLY MARKED BEFORE CALLING."

- shall be protected with an approved filter membrane material. The pipe or tile shall be placed on not less than 2" of gravel or crushed stone, shall be covered with not less than 6" of the same material. Section 1813.5.2 tile or perforated pipe is used, the invert of the pipe or tile shall not be higher than the floor elevation. The top of joints or top of perforations percent material that passes through a No. 4 sieve. The drain shall extend a minimum of 12 inches beyond the outside edge of the footing. Foundation drain shall be placed around the perimeter of a foundation that consists of gravel or crushed stone containing not more than 10 less than 6 inches above the top of the footing. The top of the drain shall be covered with an approved filter membrane material. Where a drain thickness shall be such that the bottom of the drain is not higher than the bottom of the base under the floor, and that the top of the drain is not The and
- shall be covered with not less than 6" of the same material. Section 1813.5.2

  Foundations anchors shall be a minimum of ½" in diameter, 7" into the foundation wall, minimum of 12" from corners of foundation and a maximum 6' O.C. between bolts. Section 2305.17
- maximum 6' O.C. between bolts. <u>Section 2305.17</u>
  Waterproofing and dampproofing shall be done in accordance with <u>Section 1813.0</u> of the building code.

Precaution must be taken to protect concrete from freezing. Section 1908.0

- 705 proper setbacks are maintained. It is strongly recommended that a registered land surveyor check all foundation forms before concrete is placed. This is done to verify that the
- œ Private garages located beneath habitable rooms in occupancies in Use Group R-1, R-2, R-3 or I-1 shall be separated from adjacent interior spaces by fire partitions and floor/ceiling assembly which are constructed with not less than I-hour fire resisting rating. Private garages attach side-by-side to rooms in the above occupancies shall be completely separated from the interior spaces and the attic area by means of ½ inch gypsum board or the equivalent applied to the garage side. (Chapter 4, Section 407.0 of the BOCA/1999)

  All chimneys and vents shall be installed and maintained as per Chapter 12 of the City's Mechanical Code. (The BOCA National Mechanical Private garages attached
- છ Code/1993). Chapter 12 & NFPA 211
- and not greater than 2". (Sections 1021 & 1022.0). Handralls shall be on both sides of stairway. (Section 1014.7) Headroom in habitable space is a minimum of 7'6". (Section 1204.0) shall not be less than 30", except Use Group R which is 36". In occupancies in Use Group A,B.H-4, I-1, I-2, M, R, public garages and open parking structures, open guards shall have balusters or be of solid material such that a sphere with a diameter of 4" cannot pass through any opening. Guards shall not have an ornamental pattern that would provide a ladder effect. (Handralls shall be a minimum of 34" but not more than 38". Use Group R-3 purpose of minimizing the possibility of an accidental fall from the walking surface to the lower level. Minimum height all Use Groups 42", Guardrails & Handrails: A guardrail system is a system of building components located near the open sides of elevated walking surfaces for the Sound transmission control in residential building shall be done in accordance with Chapter 12, Section 1214.0 of the City's Building Code. but not more than 38"). Handrail grip size shall have a circular cross section with an outside diameter of at least 1 4"
- Stair construction in Use Group R-3 & R-4 is a minimum of 10" tread and 7 %" maximum rise, All other Use Group minimum 11" tread,
- The minimum headroom in all parts of a stairway shall not be less than 80 inches. (6'8") 1014.4 7" maximum rise. (Section 1014.0)
- net clear opening width dimension shall be 20 inches (508)mm, and a minimum net clear opening of 5.7 sq. ft. (Section 1010.4) egress or rescue windows from sleeping rooms shall have a minimum net clear opening height dimension of 24 inches (610mm). The minimum Every sleeping room below the fourth story in buildings of Use Groups R and I-1 shall have at least one operable window or exterior door approved for emergency egress or rescue. The units must be operable from the inside without the use of special knowledge or separate tools. Where windows are provided as means of egress or rescue they shall have a sill height not more than 44 inches (1118mm) above the floor. All
- 16. Each apartment shall have access to two (2) separate, remote and approved means of egress. A single exit is acceptable when it exits directly from the apartment to the building exterior with no communications to other apartment units. (Section 1010.1)
- 17 All vertical openings shall be enclosed with construction having a fire rating of at least one (1) hour, including fire doors with self closure's (Over 3 stories in height requirements for fire rating is two (2) hours. (Section 710.0)
- **≈** extinguishment. (Table 302.1.1) The boiler shall be protected by enclosing with (1) hour fire rated construction including fire doors and ceiling, or by providing automatic

- 19 All single and multiple station smoke detectors shall be of an approved type and shall be installed in accordance with the provisions of the City's Building Code Chapter 9, Section 920.3.2 (BOCA National Building Code/1999), and NFPA 101 Chapter 18 & 19. (Smoke detectors shall be installed and maintained at the following locations):
- In the immediate vicinity of bedrooms
- 20.
- In each story within a dwelling unit, including basements
   A portable fire extinguisher shall be located as per NFPA #10. They shall bear the label of an approved agency and be of an approved type.
- The Fire Alarm System shall be installed and maintained to NFPA #72 Standard
- 23. The Sprinkler System shall be installed and maintained to NFPA #13 Standard.
- 21. All exit signs, lights and means of egress lighting shall be done in accordance with Chapter 10 Section & Subsections 1023.0 & 1024.0 of the City's Building Code. (The BOCA National Building Code/1999)
- Section 25 135 of the Municipal Code for the City of Portland states, "No person or utility shall be granted a permit to excavate or open any street or sidewalk from the time of November 15 of each year to April 15 of the following year".

  The builder of a facility to which Section 4594-C of the Maine State Human Rights Act Title 5 MRSA refers, shall obtain a certification from a design professional that the plans commencing construction of the facility, the builder shall submit the certification the Division of Inspection
- attics) Ventilation and access shall meet the requirements of Chapter 12 Sections 1210.0 and 1211.0 of the City's Building Code. (Crawl spaces &
- electrical (min. 72 hours notice) and plumbing inspections have been done.

  All requirements must be met before a final Certificate of Occupancy is issued.

  All building elements shall meet the fastening schedule as per Table 2305.2 of the City's Building Code (The BOCA National Building All electrical, plumbing and HVAC permits must be obtained by Master Licensed holders of their trade. No closing in of walls until all
- Code/1993). (Chapter M-16) Ventilation of spaces within a building shall be done in accordance with the City's Mechanical code (The BOCA National Mechanical
- Please read and implement the attached Land Use Zoning report requirements, at 12 mm 14m D
- Bridging shall comply with Section 2305.16. Boring, cutting and notching shall be done in accordance with Sections 2305.3, 2305.3.1, 2305.4.4 and 2305.5.1 of the City's Building Code.
- All signage, shall be done in accordance with Section 3102.0 signs of the City's Building Code, (The BOCA National Building Code/1999) Glass and glazing shall meet the requirements of Chapter 24 of the building code. (Safety Glazing Section 2406.0)
- ≠ (0) Secon. Symposition of 200 3/12/2 3/5 grad Y 002 6 70 17 06 added 701 Ĩ

Hoffses, Building Inspector Marge Schmuckal, Zoning Administrator ut. McDougall, PFD

\*\*This permit is herewith issued, on the basis of plans submitted and conditions placed on these plans, any deviations shall require a separate approval.

CERTIFICATE OF OCCUPANCY SHALL BE WITHHELD. CONDITIONS HAVE BEEN MET. IF THIS REQUIREMENT IS NOT RECEIVED YOUR SHALL BE SUBMITTED TO THIS OFFICE SHOWING OR EXPLAINING THAT THE WORK IS COMPLETED A REVISED PLAN OR STATEMENT FROM THE PERMIT HOLDER CONDITIONS OF THE APPROVAL SHALL BE COMPLETED. THEREFORE, BEFORE THE \*\*\*THIS PERMIT HAS BEEN ISSUED WITH THE UNDERSTANDING THAT ALL THE

CAD LT. 2000, OR EQUIVILENT. 114.0 OF THE BUILDING CODE) SHALL ALSO BE PRESENTED TO THIS DIVISION ON AUTO \*\*\*\*ALL PLANS THAT REQUIRE A PROFESSIONAL DESIGNER'S SEAL, (AS PER SECTION

\*\*\*\*\*\*CERTIFICATE OF OCCUPANCY FEE \$50.00

# THIS IS NOT A PERMIT/CONSTRUCTION CANNOT COMMENCE UNTIL THE PERMIT IS ISSUED

# Building or Use Permit Pre-Application Additions/Alterations/Accessory Structures

To Detached Single Family Dwelling

In the interest of processing your application in the quickest possible manner, please complete the Information below for a Building or Use Permit.

NOTE\*\*If you or the property owner owes real estate or personal property taxes or user charges on any property within the City, payment arrangements must be made before permits of any kind are accepted.

Location/Address of Construction:

rest-view

	Tax Assessor's Chart, Block & Lot Number	Owner: New York Tray	Telephone#·
	Chart# 389 Block# C Lot# ODS	Brian Regan	878-9046
	,	Buyer's Name (If Applicable)	Cost Of Work: Fee
	106 Crest View Drive		\$1,000.00 \$90,
	Proposed Project Description: (Please be as specific as possible) Repair existing cleek, 6 SONNA tubes and a beam. Use will be enalosing the deck with a 141x 1513 season screen room.	Repair existing cleek, 6 sonna tul	bes and a beam.
	Contractor's Name Address & Talentons	(201) 985-220	
,	Miline Windows & Telephone 71 fortland Rd. Kinnebunk ME MADA2	Brtland Rd. Kinnebunk ME,	MAZ ON
	Senarate permits are required for Int	Senarate normits are required for Internal & External III	

e permis are required for internal & External Plumbing, HVAC and Electrical installation

4

•All construction must be conducted in compliance with the 1996 B.O.C.A. Building Code as amended by Section 6-Art II. •All plumbing must be conducted in compliance with the State of Maine Plumbing Code.

You must Include the following with you application: ·HVAC(Heating, Ventilation and Air Conditioning) installation must comply with the 1993 BOCA Mechanical Code. •All Electrical Installation must comply with the 1996 National Electrical Code as amended by Section 6-Art III.

1) A Copy of Your Deed or Purchase and Sale Agreement of Building Inspection 2) A Copy of your Construction Contract, if available CITY OF PORTLAND, ME

3) A Plot Plan (Sample Attached)

If there is expansion to the structure, a complete plot plan (Site Plan) must include property lines. Structures include decks porches, a bow windows cantilever sections and hold overhangs as well as, she The shape and dimension of the lot, all existing buildings (if any), the proposed structure and

Scale and required zoning district setbacks

## 4) Building Plans (Sample Attached)

A complete set of construction drawings showing all of the following elements of construction:

- Cross Sections w/Framing details (including porches, decks w/ railings, and accessory structures)
- Floor Plans & Elevations
- Window and door schedules
- Foundation plans with required drainage and dampproofing
- equipment, HVAC equipment (air handling) or other types of work that may require special review must be included Electrical and plumbing layout. Mechanical drawings for any specialized equipment such as furnaces, chimneys, gas

#### Certification


representative shall have the authority to enter all areas covered by this permit at any reasonable hour to enforce the provisions of the of this jurisdiction. In addition, if a permit for work described in this application is issued, I certify that the Code Official's authorized that I have been authorized by the owner to make this application as his/her authorized agent. I agree to conform to all applicable laws I hereby certify that I am the Owner of record of the named property, or that the proposed work is authorized by the owner of record and codes applicable to this permit

D.:11: D	Signature of applica	The state of the s	
	nt:		!
9	$\aleph$		
	0/		
	A. HONK Maine was		
	1		
	Attinic		
,	(2)		
	incom 3		
	Z W		
	Da		
	te:		
+	3		
ORGANIZATION DE LA COMPANION D	300		
A CONTRACTOR OF THE PERSONS ASSESSED.	Ŏ		
2000	and the second s		
***************************************			
	100		
1	- 1		

Building Permit Fee: \$30.00 for th $\theta$  1st \$1000 cost plus \$6.00 per \$1,000.00 construction cost thereafter. ONNSPICORRESPMINUGENTIAPADSFD.WPD

	Other:
	Final:
	Plumbing:
	:gnims:A
	Foundation:
Date	${\bf L}_{\bf A}{\bf pe}$
	Inspection Record
\$ 1,8	DE MARCH ZIK CURT MAIN & MINDON & SUNTOON Thore Will be 8-NOW 16' 5000 Table CXSIENY DOCK - ON FOOTING H' below grade - Ban Will be 8-NOW 16' 5000 Table CXSIENY DOCK - ON FOOTING H' below grade - Ban Will be 8-NOW 16' 5000 Table
added to	19/ MARCH 314 CULLA MAIN & WINDON & SUNFOOM Those will be 8- Now 16' 5000 Tubl.
	COMMENTS

Brian Regan 108 Crestview Drive Portland, ME 04/03

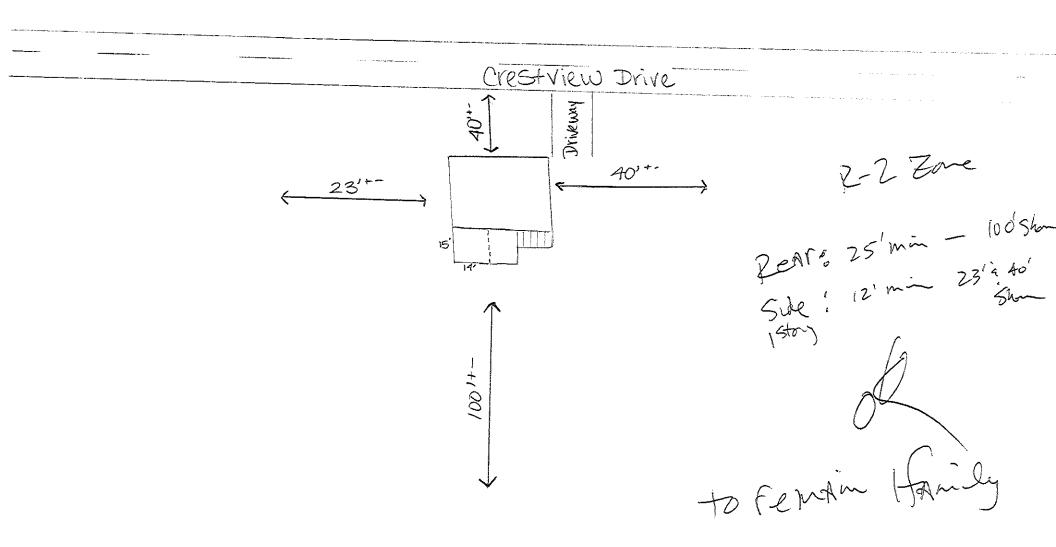

### TABLE 21-1 - ROOF SPAN DESIGN TABLE FOR HONEYCOMB PANELS

# ROOF SPAN DESIGN TABLES (HONEYCOMB PANELS)<sup>(1)</sup> FOR LESSOR OF ULTIMATE LOAD/2.5 OR LOAD AT SPAN/120

				The state of the s							SEE NOTES ON PAGE 2, 1,0	ON SELC	SEE N
					•	•	•	•	•	•	6"HC		T a
									•	-	4.5" HC		18
											3*HC+H	3,	18
											3. HC		18
					٠	•	•	-					
								-	• •	•	6 FC	4	17
											15. HO	+	<b>3</b>
											3 50	4	17
											34 150	$\perp$	1
				•	•	-	•	٠	•	•	e, HC	+	
						•	•	•	•	•	a.o. HC	$\downarrow$	
											3.HC + H	$\downarrow$	ō
											3" HC	Ļ	
				•	•	•	•	•	•	-	G.	+	ä
					•	-	•	•	-	•	4.5 HC	$\frac{1}{1}$	
								•	•	-	D TO THE	╀	7 0
										•	3 0 70	+	
	•										or a	+	
	•	•	-	•	•	-	-	-				1	
				•	•	-	•		•   .	•	6" HC	4	<u> </u>
						•	-	• •	•	-	4.5° HC	4	14
								•	•	•	3'HC+H		
								•	•	•	3, HC	Ť	
•	-	•	•	•	-	-	-					4	
			٠	•			• •	•	•	-	6" HC	_	
					•	-	· ·	•	•	•	4.5°HC	13	
							• •	•	•	•	3"HC + H		
								$\cdot  $	•	-	3: H.	4	
•	•	•	•	•	•	٠	-					_	
		٠			•		. .	•	•	•	6.HC	2	
					•		. -	•	•	-	4.5" HC	72	
						-	. -	. .	•	•	3.HC+H	2	
									•	•	3" HC	72	
•	•	•	•	-	•	-	-		-			-	
	•	•	•	•	-	•	-	٠   .	•	•	0, HC	=	
		•	•	-	•	•		• •	•	•	4.5" HC	$\dashv$	
				-	•	-		٠.	•].	•	3*HC+H	=	-
									.	-	3" HC	4	
•   •	•	•	-	•	-		-	•	-				
•	•	٠	•	•	•	-	-			-	0" HC	5	1
•	•	•	•	•	•	٠	•	•	-	•	46'HO	0	1
		•	•	-	•	•		-		.   .	3. HC + H	0	T
•	•										21	1	1
•			. -	•	•	•	•	•	•	•	6"HC	\ <u></u>	
•	•				•	•	•	•	•	•	4.5" HC	9	Τ
	•	•	-	-	. .	•	•	•	•	•	3" HC + H	8	Γ
					•	•	•	•	•	•	3°HC	0	
•	•	•	•		•	-							Ì
•	•	•	-	•			•   •	•	•	-	0" HC	8	
•	•	•	•	•			. .	• •	•	•	4.5" HC	8	
•	•	٠	•	-	•	•	. -	• •	•	-	3" HC + H	8	
								•	•	•	3,140	8	
(psf)	(psI)	(psi)	fied)	(10.4)			A STATE OF THE PARTY OF THE PAR				The state of the s		_
8	55	(psf)	3 3	<u> </u>	(eg)	(Fg G)	(psf)	(psl)	(ps/)	(psi)		3	
ATTACAMENT THE PARTY OF THE PAR	ELS	(H/C) PAN	NEYCOMB	OS FOR HO	OOF LOAI	30 BLE LIVE H	25	20	<b>5</b>	<del>-</del>	CONFIG.	SPAN	
				The state of the s	House the second		ALIONA	Militaria de la facilità della facilità de la facilità de la facilità della facil	Samuel and Control of the Control of	P(0)HCmSmmxymy/Dimper	PANEL	ANEL	- Contract
				W. 24 C 1 St. 1									İ

E NOTES ON PAGE 2, 1.0



CRADE BOTTOU OF FOOTING TO REST ON UNDESTURBED SOIL BELOW FROST LINE SEE NOTES ON PAGE 4.0.2 RAPAD TRANSON TB"IF MAY CONC. FOOTING-SLOW, DOOR 16' MAX FOR 6' PANEL & 6' SUPPORT BEAM
15' MAX FOR 4.5' PANEL & 4.5' SUPPORT BEAM
14' MAX FOR 3' PANEL & 3' SUPPORT BEAM <u>:-</u> ST WAX WOOD FLOOR Size ADJ. RODY ANGLY 3/4" EXTERIOR PLYWOOD SLIDING DOOR ON SILL SECTION WITH DOOR FLOOR FXFANDER - FIXED TO DECK WITH NO. 1477-3" HEX SCREWS HGURE 40-1 -A-FRAME ROOM CROSS SECTION AND SBUY 5858 376 C PANELS
C PANELS
C PANELS
C PANELS
C PANELS A-FRAME ROOM FLOOR PLAN Donbhu A-FRAME ROOM SUPPORT BEAU HONTICOUS OF FOUNDATION PARTIES 6161W2.912.9 SUPPORT BEAU HEW CHIEL (2) 2x12
HEW ALUN. SLIDING DOOR 6 New 1 ENHTL & RIDGE BEAU CONCRETE FLOOR PANELS WITH H-STIFFENERS WIELS RAPID TRANSON SUDAG DOOR ON SEL SECTION MIN DOOR FLOAR EXPANDER FIXED TO CONCEPTE WAL ANCHORS & MIN 1/4" IF 1/4" IN 12" O" O.C. APPROX. CRUOT. BOTTOM OF FOOTING TO REST TEWPERED CLASS SUDING ALUM, DOOR Ç. HVM JSROW

Betterliving

gabla t. chri & cashla 2 styl