


Model #: FO-824

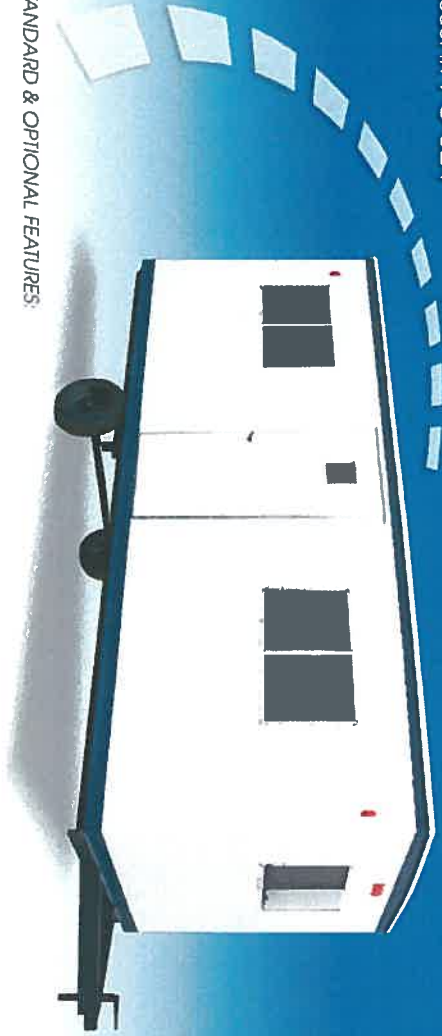

STANDARD & OPTIONAL FEATURES:

Standard furniture package includes (1) large plan table; (1) wall-mounted print rack; full-width built-in desk - across front end wall - with two-drawer file cabinet and knee wells for two work stations.

This rugged field office can be custom ordered to meet your specific job requirements. Popular options include custom interior configurations, exterior siding styles and trim colors, and plumbing such as half-baths, wash basins and showers.

FO SERIES field offices are available in widths of 8, 10, 12, 14 and 24 feet / Overall lengths ranging from 20' to 64'.



8 x 24 ft.

SPECIFICATIONS:

FRAME:

Outrigger Frame, Non-detachable Hitch/Single Axle/12 Ply Tires

FLOOR:

R-7 Unfaced Insulation, 2x4 Floor Joists/ 5/8" Plywood Decking T&G
12"x12"x1/8" Vinyl Composition Tile

WALLS:

2x3 @ 16" O/C Exterior Studs 7'-0" High
1 1/2" - 5" Open Office Area
R-7 Unfaced Insulation
5/32" Pre-finished Wood Grain Paneling
0.19" Aluminum Siding

ROOF / CEILING:

Tapered 2x4 Rafter @ 16" O/C, 30 psf LL
R-11 Unfaced Insulation
1/2" Pre-finished Gypsum Ceiling
30 Gauge Galvanized Steel Roofing

EXTERIOR DOOR:

3 1/2" x80" Aluminum M/H Type
14"x14" Life/Keyed Knob Set/Stay Chain

WINDOWS:

46" or 30" x 27" Horizontal Slider, Mill Frame

ELECTRICAL:

120/240 Volt, 1 Phase Panel
#14 AWG Romex / Fluorescent Strip Ceiling Lights

PLUMBING: Optional

HEATING & AIR CONDITIONING:
Base Board Heat and thru-wall Air Conditioning

SPECIALTIES:

Standard Furniture Package
BUILDING SIZE:
824 Model (8'-0" x 20'-0" Box)

"The Value Leader in High-quality Mobile Workspace!"

Mark Line Industries

Corporate Offices
51687 County Road 133
Bristol, IN 46507

Contact Our Nearest Location... Toll Free!

Bristol, IN **888.627.5563**

Ephrata, PA **866.585.6597**

Roxboro, NC **866.433.1244**

Website: marklineindustries.com



Mark Line Industries
Building Green

© 2007-2009 Mark Line Industries. All rights reserved

* Specifications Subject to Change Without Notice