




WINDOW HEAD @ DRIVE THRU 3" = 1'-0"





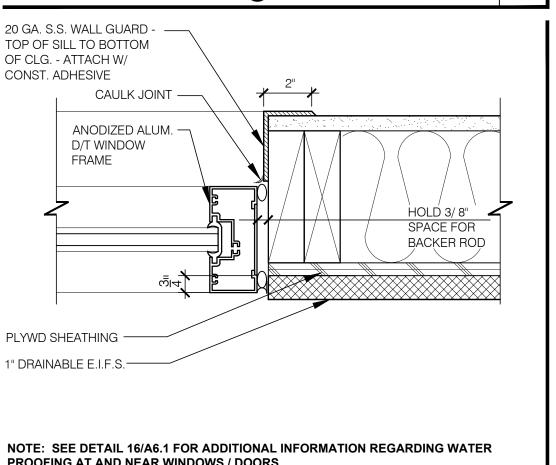

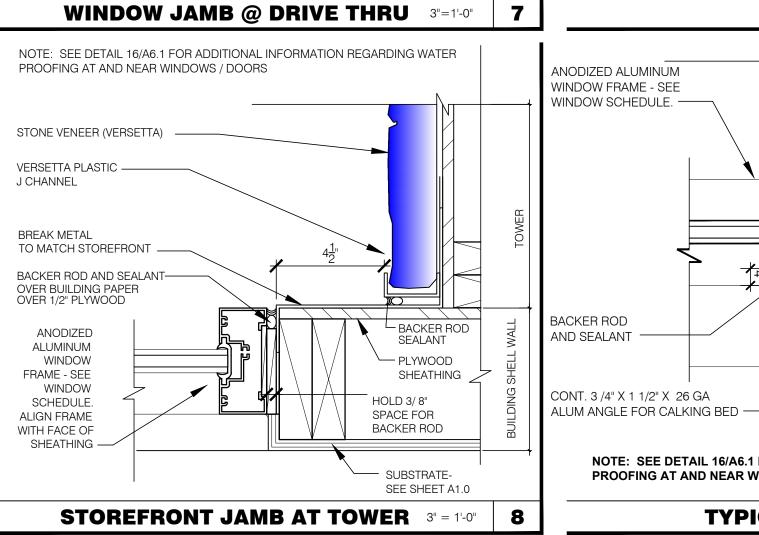

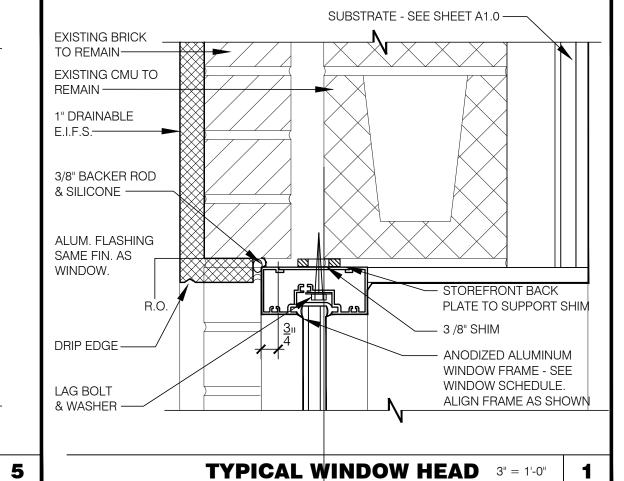

NOTE: SEE DETAIL 16/A6.1 FOR ADDITIONAL INFORMATION REGARDING WATER

TYPICAL WINDOW SILL 3"=1'-0" 2

NOT USED

 $\langle \mathbb{V} \times \times \times \rangle$

E.I.F.S.

TYPICAL WINDOW JAMB 3"=1'-0"

- 1" DRAINABLE

PROOFING AT AND NEAR WINDOWS / DOORS

- SILICONE SEALANT

LAG BOLT & WASHER

OVER LAG BOLT

-3/8" PLASTIC SHIM


- SOLID SURFACE SILL

ANODIZED ALUMINUM WINDOW FRAME - SEE WINDOW SCHEDULE. ALIGN

ANODIZED ALUM.


1" DRAINABLE

E.I.F.S.

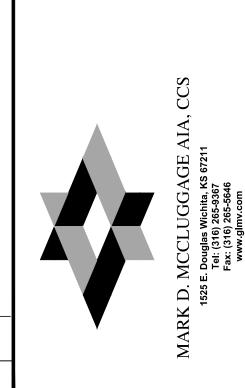



15034.000

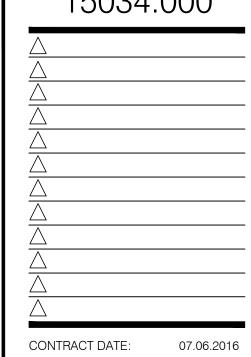

BUILDING TYPE: CONVERSION PLAN VERSION: FEBRUARY 2015 SITE NUMBER: XXX-XXX STORE NUMBER:

TACO BELL

1363 WASHINGTON AVE.





NOTE: SEE DETAIL 16/A6.1 FOR ADDITIONAL INFORMATION REGARDING WATER PROOFING AT AND NEAR WINDOWS / DOORS

3