



Precast Concrete Curb (PCC) Set In Existing Pavement 12/11 N.T.S.

SEE NOTE 9.

0.9"

LD\_502


000

(Plan View)

.<del>|</del>-000

ŸP**∤**—o o o

N.T.S. Source: VHB LD\_420 Source: VHB LD\_405 TRUNCATED DOMES

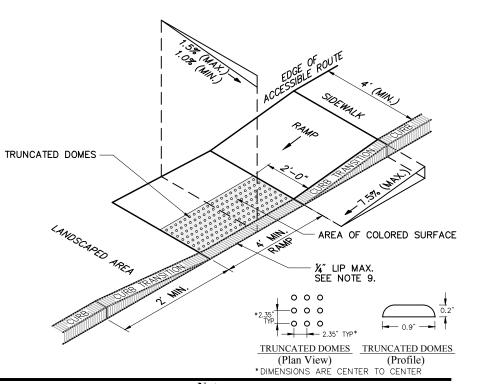

TRUNCATED DOMES -AREA OF COLORED SURFACE <u>,</u>+-000 2.35" TYP\* 0.9" TRUNCATED DOMES TRUNCATED DOMES (Plan View) (Profile)
\*DIMENSIONS ARE CENTER TO CENTER

I. THE MAXIMUM ALLOWABLE SIDEWALK AND CURB RAMP CROSS SLOPES SHALL BE 1.5 (1% MIN.).

2. THE MAXIMUM ALLOWABLE SLOPE OF ACCESSIBLE ROUTE EXCLUDING CURB RAMPS SHALL BE 5%.

3. THE MAXIMUM ALLOWABLE SLOPE OF ACCESSIBLE ROUTE AT CURB RAMPS SHALL BE 7.5%.

4. A MINIMUM OF 3 FEET CLEAR SHALL BE MAINTAINED AT ANY PERMANENT OBSTACLE IN

ACCESSIBLE ROUTE (I.E., HYDRANTS, UTILITY POLES, TREE WELLS, SIGNS, ETC.).

6. RAMP, CURB AND ADJACENT PAVEMENTS SHALL BE GRADED TO PREVENT PONDING.

5. CURB TREATMENT VARIES, SEE PLANS FOR CURB TYPE.

7. TYPICAL SIDEWALK SECTION FOR RAMP SECTION CONSTRUCTION.

Vertical Granite Curb (VGC) Set In Existing Pavement 12/11

Source: VHB

LD\_403

N.T.S.

TRUNCATED DOMES TRUNCATED DOMES TRUNCATED DOMES TRUNCATED DOMES \*DIMENSIONS ARE CENTER TO CENTER 1. THE MAXIMUM ALLOWABLE SIDEWALK AND CURB RAMP CROSS SLOPES SHALL BE 1.5 (1% MIN.). 1. THE MAXIMUM ALLOWABLE SIDEWALK AND CURB RAMP CROSS SLOPES SHALL BE 1.5 (1% MIN.).

AREA OF COLORED SURFACE

N.T.S.

LD\_501

3. THE MAXIMUM ALLOWABLE SLOPE OF ACCESSIBLE ROUTE AT CURB RAMPS SHALL BE 7.5%. 4. A MINIMUM OF 3 FEET CLEAR SHALL BE MAINTAINED AT ANY PERMANENT OBSTACLE IN ACCESSIBLE ROUTE (I.E., HYDRANTS, UTILITY POLES, TREE WELLS, SIGNS, ETC.).

5. CURB TREATMENT VARIES, SEE PLANS FOR CURB TYPE. 6. RAMP, CURB, AND ADJACENT PAVING SHALL BE GRADED TO PREVENT PONDING.

7. SEE TYPICAL SIDEWALK SECTION FOR RAMP CONSTRUCTION.

Accessible Curb Ramp (ACR) Type 'C-D'

8. WHERE ACCESSIBLE ROUTES ARE LESS THAN 5' IN WIDTH (EXCLUDING CURBING) A 5'  $\times$  5' PASSING AREA SHALL BE PROVIDED AT INTERVALS NOT TO EXCEED 200 FEET. 9. ELIMINATE CURBING AT RAMP WHERE IT ABUTS ROADWAY, EXCEPT WHERE VERTICAL CURBING IS INDICATED ON THE DRAWINGS TO BE INSTALLED AND SET FLUSH.

Source: VHB

2. THE MAXIMUM ALLOWABLE SLOPE OF ACCESSIBLE ROUTE EXCLUDING CURB RAMPS SHALL BE 5%.

10. DETECTABLE WARNINGS SHALL CONTRAST VISUALLY WITH ADJOINING SURFACES. 11. DETECTABLE WARNINGS SHALL B INSTALLED PERPENDICULAR TO ACCESSIBLE ROUTE. 12. CONTRACTOR TO SUBMIT R.F.I. FOR THIS TYPE OF ACCESSIBLE CURB RAMP FOR APEX

	RNINGS SHALL CONTRAST VISUA RNINGS SHALL BE INSTALLED PE		
Accessible C	Curb Ramp (ACR)	Type 'G-D'	11/10
N.T.S.	Source:	VHB	LD_506

- CURBLINE

- CURBLINE

1. THE MAXIMUM ALLOWABLE SIDEWALK AND CURB RAMP CROSS SLOPES SHALL BE 1.5 (1% MIN.).

3. THE MAXIMUM ALLOWABLE SLOPE OF ACCESSIBLE ROUTE AT CURB RAMPS SHALL BE 7.5%.

4. A MINIMUM OF 3 FEET CLEAR SHALL BE MAINTAINED AT ANY PERMANENT OBSTACLE IN

8. WHERE ACCESSIBLE ROUTES ARE LESS THAN 5' IN WIDTH (EXCLUDING CURBING) A 5'  $\times$  5' PASSING AREA SHALL BE PROVIDED AT INTERVALS NOT TO EXCEED 200 FEET.

9. ELIMINATE CURBING AT RAMP WHERE IT ABUTS ROADWAY, EXCEPT WHERE VERTICAL CURBING IS INDICATED ON THE DRAWINGS TO BE INSTALLED AND SET FLUSH.

6. RAMP, CURB, AND ADJACENT PAVEMENTS SHALL BE GRADED TO PREVENT PONDING.

5. CURB TREATMENT VARIES, SEE PLANS FOR CURB TYPE.

7. TYPICAL SIDEWALK SECTION FOR RAMP SECTION CONSTRUCTION.

2. THE MAXIMUM ALLOWABLE SLOPE OF ACCESSIBLE ROUTE EXCLUDING CURB RAMPS SHALL BE 5%.

8. WHERE ACCESSIBLE ROUTES ARE LESS THAN 5' IN WIDTH (EXCLUDING CURBING) A 5'  $\times$  5' PASSING AREA SHALL BE PROVIDED AT INTERVALS NOT TO EXCEED 200 FEET. 9. ELIMINATE CURBING (OTHER THAN VERTICAL CURBING, WHICH SHALL BE SET FLUSH) WHERE IT

- CAP STEEL PIPE POST

TYPICAL SIGN

10. DETECTABLE WARNINGS SHALL CONTRAST VISUALLY WITH ADJOINING SURFACES. 11. DETECTABLE WARNINGS SHALL BE INSTALLED PERPENDICULAR TO THE ACCESSIBLE ROUTE.

TI. DETECTAB	LE WARNINGS SHALL BE INSTALLED PERFENDICULAR TO TH	TE ACCESSIBLE ROOTE.
Accessib	ole Curb Ramp (ACR) Type 'M-D'	11/10
N.T.S.	Source: VHB	LD_512

Jan. 4, 2016



DAVID FENSTERMACHER No. 11913 YCENSO.

Drawing Number

Project Number

52387.04

(PAINTED BLUE) --- ACCESS AISLE 4" BLUE LINES 24" ON CENTER (PAINTED BLUE) - SEE DETAIL o (MIN.) 5' (MIN.) Detail (PAINTED WHITE) ACCESSIBLE PARKING

- AREA OF COLORED SURFACE

0.9" —

2.35" TYP\*

\*DIMENSIONS ARE CENTER TO CENTER

(Plan View)

2. THE MAXIMUM ALLOWABLE SLOPE OF ACCESSIBLE ROUTE EXCLUDING CURB RAMPS SHALL BE 5%.

3. THE MAXIMUM ALLOWABLE SLOPE OF ACCESSIBLE ROUTE AT CURB RAMPS SHALL BE 7.5%.

4. A MINIMUM OF 3 FEET CLEAR SHALL BE MAINTAINED AT ANY PERMANENT OBSTACLE IN

8. WHERE ACCESSIBLE ROUTES ARE LESS THAN 5' IN WIDTH (EXCLUDING CURBING) A 5'  $\times$  5' PASSING AREA SHALL BE PROVIDED AT INTERVALS NOT TO EXCEED 200 FEET.

11. DETECTABLE WARNINGS SHALL BE INSTALLED PERPENDICULAR TO THE ACCESSIBLE ROUTE.

12. CONTRACTOR TO SUBMIT R.F.I. FOR THIS TYPE OF ACCESSIBLE CURB RAMP FOR APEX ROADWAY CROSSINGS.

9. ELIMINATE CURBING AT RAMP WHERE IT ABUTS ROADWAY, EXCEPT WHERE VERTICAL CURBING IS

ACCESSIBLE ROUTE (I.E., HYDRANTS, UTILITY POLES, TREE WELLS, SIGNS, ETC.).

6. RAMP, CURB AND ADJACENT PAVEMENTS SHALL BE GRADED TO PREVENT PONDING.

10. DETECTABLE WARNINGS SHALL CONTRAST VISUALLY WITH ADJOINING SURFACES.

5. CURB TREATMENT VARIES, SEE PLANS FOR CURB TYPE.

7. SEE TYPICAL SIDEWALK SECTION FOR RAMP CONSTRUCTION.

INDICATED ON THE DRAWINGS TO BE INSTALLED AND SET FLUSH.


Accessible Curb Ramp (ACR) - Type 'B-D'

N.T.S.

LANDSCAPE AREA (TYP.)

TRUNCATED DOMES —

- 1. ALL DIMENSIONS TO EDGES OF 4" PAVEMENT STRIPING.
- 2. 8' STALL WIDTH REFERS TO 8' CLEAR BETWEEN INSIDE EDGES OF PAVEMENT MARKINGS.
- 3. ALL SLOPES THROUGHOUT THE ACCESSIBLE PARKING AND AISLE AREAS SHALL NOT EXCEED 1.5%.
- **Accessible Parking Space**

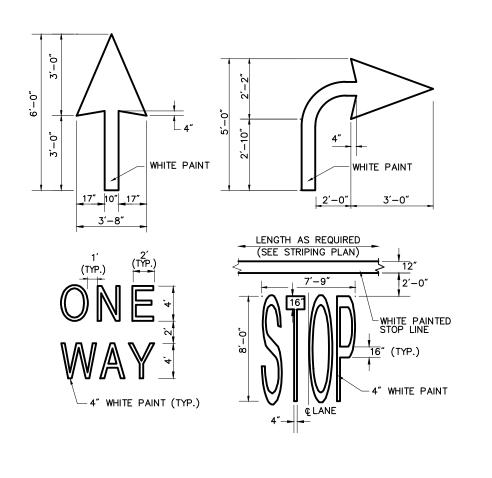

1. PAVEMENT MARKINGS TO BE INSTALLED FOR ON SITE WORK IN LOCATIONS SHOWN.

<b>Painted Pavem</b>	ent Markings - On Site	
N.T.S.	Source: VHB	LD.

Crosswalk N.T.S. Source: VHB LD\_553

2' (MAX.)

8' (TYP.)

1. TWELVE INCH (12") LINES SHALL BE APPLIED IN ONE APPLICATION, NO COMBINATION OF LINES (TWO - 6

LONGITUDINAL CROSSWALK LINES TO BE PARALLEL TO CURBLINE.

ALL LONGITUDINAL CROSSWALK LINES TO BE THE SAME LENGTH AND PROPERLY ALIGNED.

4. CROSS WALK SIDESLOPE SHALL NOT EXCEED 1.5%.

INCH LINES) WILL BE ACCEPTED.

2½" DIA. STEEL POST (PAINT COLOR SELECTED BY ARCHITECT) - BOLLARD (SEE DETAIL) FINISH GRADE
SURFACE TREATMENT VARIES

\* THIS DIMENSION SHALL BE A MINIMUM OF 5' FOR ACCESSIBLE SIGNAGE. \*\* THIS DIMENSION SHALL BE A A MAXIMUM OF 8' FOR ACCESSIBLE SIGNAGE.

**Proposed Taco Bell** 1363 Washington Avenue Portland, Maine No. Revision Date Appvd.

Permitting Not Approved for Construction

6/08 D\_554 LD\_552 Source: VHB

**Bollard Mounted Sign** N.T.S. LD\_703 Source: VHB