

Strong-Drive® SDWS TIMBER Screw



The Simpson Strong-Tie® Strong-Drive® SDWS **TIMBER** screw is specifically designed for structural wood-to-wood applications, including ledger, and is also ideal for a wide variety of projects where a high-strength attachment is needed. This 0.220" diameter fastener requires less torque to install than comparable fasteners, making it easier to drive, and the corrosion-resistant coating makes it suitable for many interior or exterior applications.

Features:

Large washer head provides maximum bearing area (0.75" head dia.)



Double-barrier coating provides corrosion resistance equivalent to hot-dip galvanization, making it suitable for certain exterior and preservative-treated wood applications, as described in the evaluation report.

Bold thread design provides superior holding power

Under-head nibs offer greater control when seating the head

Patented 4CUT™ tip ensures fast starts, reduces installation torque and eliminates the need for pre-drilling in most applications



Screws to Attach Ledger

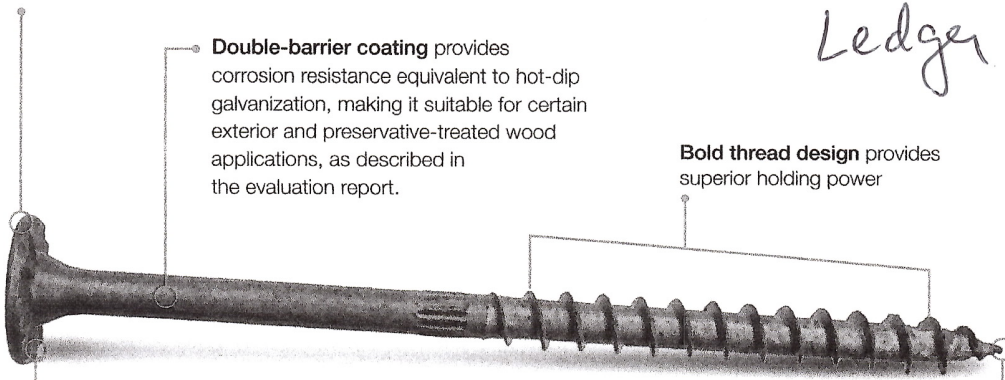

Codes/Standards: IAPMO-UES ER-192, State of Florida FL13975

U.S. Patents 5,897,280; 7,101,133

Size identification on all SDWS screw heads

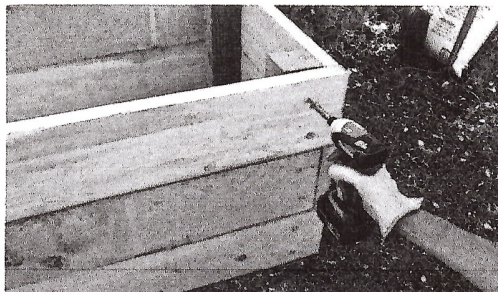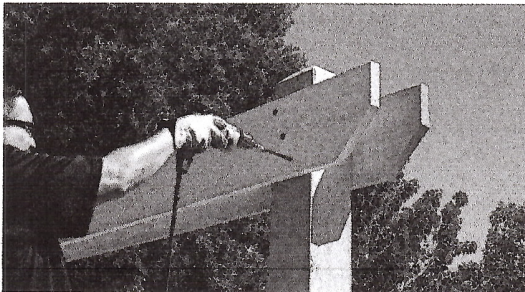

14-034133-1 42074 03/15/14 01/14/14 01/14/14 01/14/14