

MAINE CODES
 1993 BOCA NATIONAL BUILDING CODE WITH AMENDMENTS
 1993 BOCA NATIONAL PLUMBING CODE
 1993 CABO MODEL ENERGY CODE
 1999 NATIONAL ELECTRIC CODE
 1997 NFPA 31 (MECHANICAL) - EFFECTIVE 4/1/01
 1994 NFPA 101 (LIFE SAFETY CODE)

R.A. OR P.E. APPROVAL STAMP

SITE LOCATION
 PORTLAND
 MAINE



Date: 09/13/2003
 App. by: S.B.
 NO SCALE

Plan: COVER
 Page: 1

JOCELYNE DERASPE
 C-00254


ADVANCED QUALITY CUSTOM HOMES

NOTE: THIS COVER SHEET AND APPROVAL DOES NOT INCLUDE SITE CONSTRUCTION

USE GROUP : R3
 CONSTRUCTION TYPE : SB
 FLOOR AREA : 803 SQ. FT.
 BASEMENT FLOOR : 803 SQ. FT.
 FIRST FLOOR : 803 SQ. FT.
 SECOND FLOOR : 803 SQ. FT.

VOLUME OF ENCLOSED SPACE : 19 272 CU. FT.
 STORES ABOVE FOUNDATION : 2 STORES
 BUILDING HEIGHT ABOVE FOUNDATION : 26'-1 3/4"
 DESIGN OCCUPANCY LOAD PER FLOOR : 4 FOR FIRST FLOOR AND 4 FOR SECOND FLOOR (1 x 200 S.Q.)
 FIRE ALARM SYSTEM : SMOKE DETECTORS
 FIRE SUPPRESSION SYSTEM : N/A
 OTHER : N/A
 DESIGN LIVE LOAD PSF : 25
 WALL : NON SLEEPING 40
 FLOOR : SLEEPING 30
 ROOF : 52.5psf. (SNOW LOAD 60psf. AND WIND LOAD 90mph.)
 CORRIDOR : N/A
 STAIRS : 40
 BALCONIES : N/A
 PORCH : N/A

TYPE OF HEATING SYSTEM : CENTRAL BY OTHER (GAS, OIL, OR ELECT.)
 VENTING SYSTEMS : RANGE HOOD AND BATH FAN TO BE EXHAUSTED TO EXTERIOR
 EXTERIOR ENVELOPE THERMAL PERFORMANCE WALL :
 FLOOR : SEE MECHCHECK
 FLOOR CANTILEVER : SEE MECHCHECK
 ROOF AND CEILING : SEE MECHCHECK
 DOORS : SEE MECHCHECK
 THERMOS WINDOW : SEE MECHCHECK
 FOUNDATION : ON SITE
 BY CLIENT :
 NOTE: THE BUILDING SHALL BE SET BACK GREATER THAN 5' FOR A NON-RATED EXTERIOR WALL AND THE BUILDING SHALL NOT BE LOCATED WITHIN THE FIRE LIMITS.
 LABEL LOCATION DATA PLATE + STATE LABEL + PFS LABELS + WARRANTY SEALS : FIRST FLOOR #1
 UNDER KITCHEN SINK

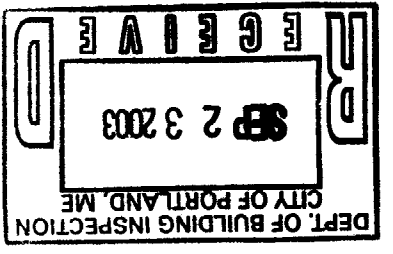

NEW

PAGE	TITLE	DRAWING DATE	REVISION DATE
1	COVER PAGE	SEPTEMBER 2003	N/A
2	FOUNDATION	SEPTEMBER 2003	
3	FRONT ELEVATION	SEPTEMBER 2003	
4	RIGHT ELEVATION	SEPTEMBER 2003	
5	REAR ELEVATION	SEPTEMBER 2003	
6	LEFT ELEVATION	SEPTEMBER 2003	
7	FIRST FLOOR PLAN	SEPTEMBER 2003	
8	SECOND FLOOR PLAN	SEPTEMBER 2003	
9	FIRST FLOOR FRAMING	SEPTEMBER 2003	
10	SECOND FLOOR FRAMING	SEPTEMBER 2003	
11	WINDOWS-DOORS SCHEDULE AND UNTEL DETAILS	SEPTEMBER 2003	
12	CROSS SECTION	SEPTEMBER 2003	
13	CROSS SECTION TYPICAL	SEPTEMBER 2003	
14A TO 14F	BEAM EACH FLOOR + LVL CALCUL	SEPTEMBER 2003	
15A TO 15J	TRUSS DETAILS	SEPTEMBER 2003	
16A, 16B	PLUMBING EACH FLOOR	SEPTEMBER 2003	
17	PLUMBING PROFILE	SEPTEMBER 2003	
18A, 18B, 18C	ELECTRICAL EACH FLOOR	SEPTEMBER 2003	
18	ELECTRICAL (PANEL BOX)	SEPTEMBER 2003	

DRAWING INDEX


THIRD PARTY INSPECTION AGENCY MAINE

P.F.S. CORPORATION
 401, Market Street
 Bloomsburg, Pennsylvania
 USA 17815

Les Habitacions techniques Ltée
 Technical Habitacion Ltd
 255, rue du Parc, Ville St-Joseph de Beauce
 EXP. : JUNE 30, 2004

STATE APPROVAL STAMP

- ASPHALT SHINGLES
- ALUMINUM FASCIA
- VENTILATED SOFFIT
- VINYL SIDING
- MOLDINGS

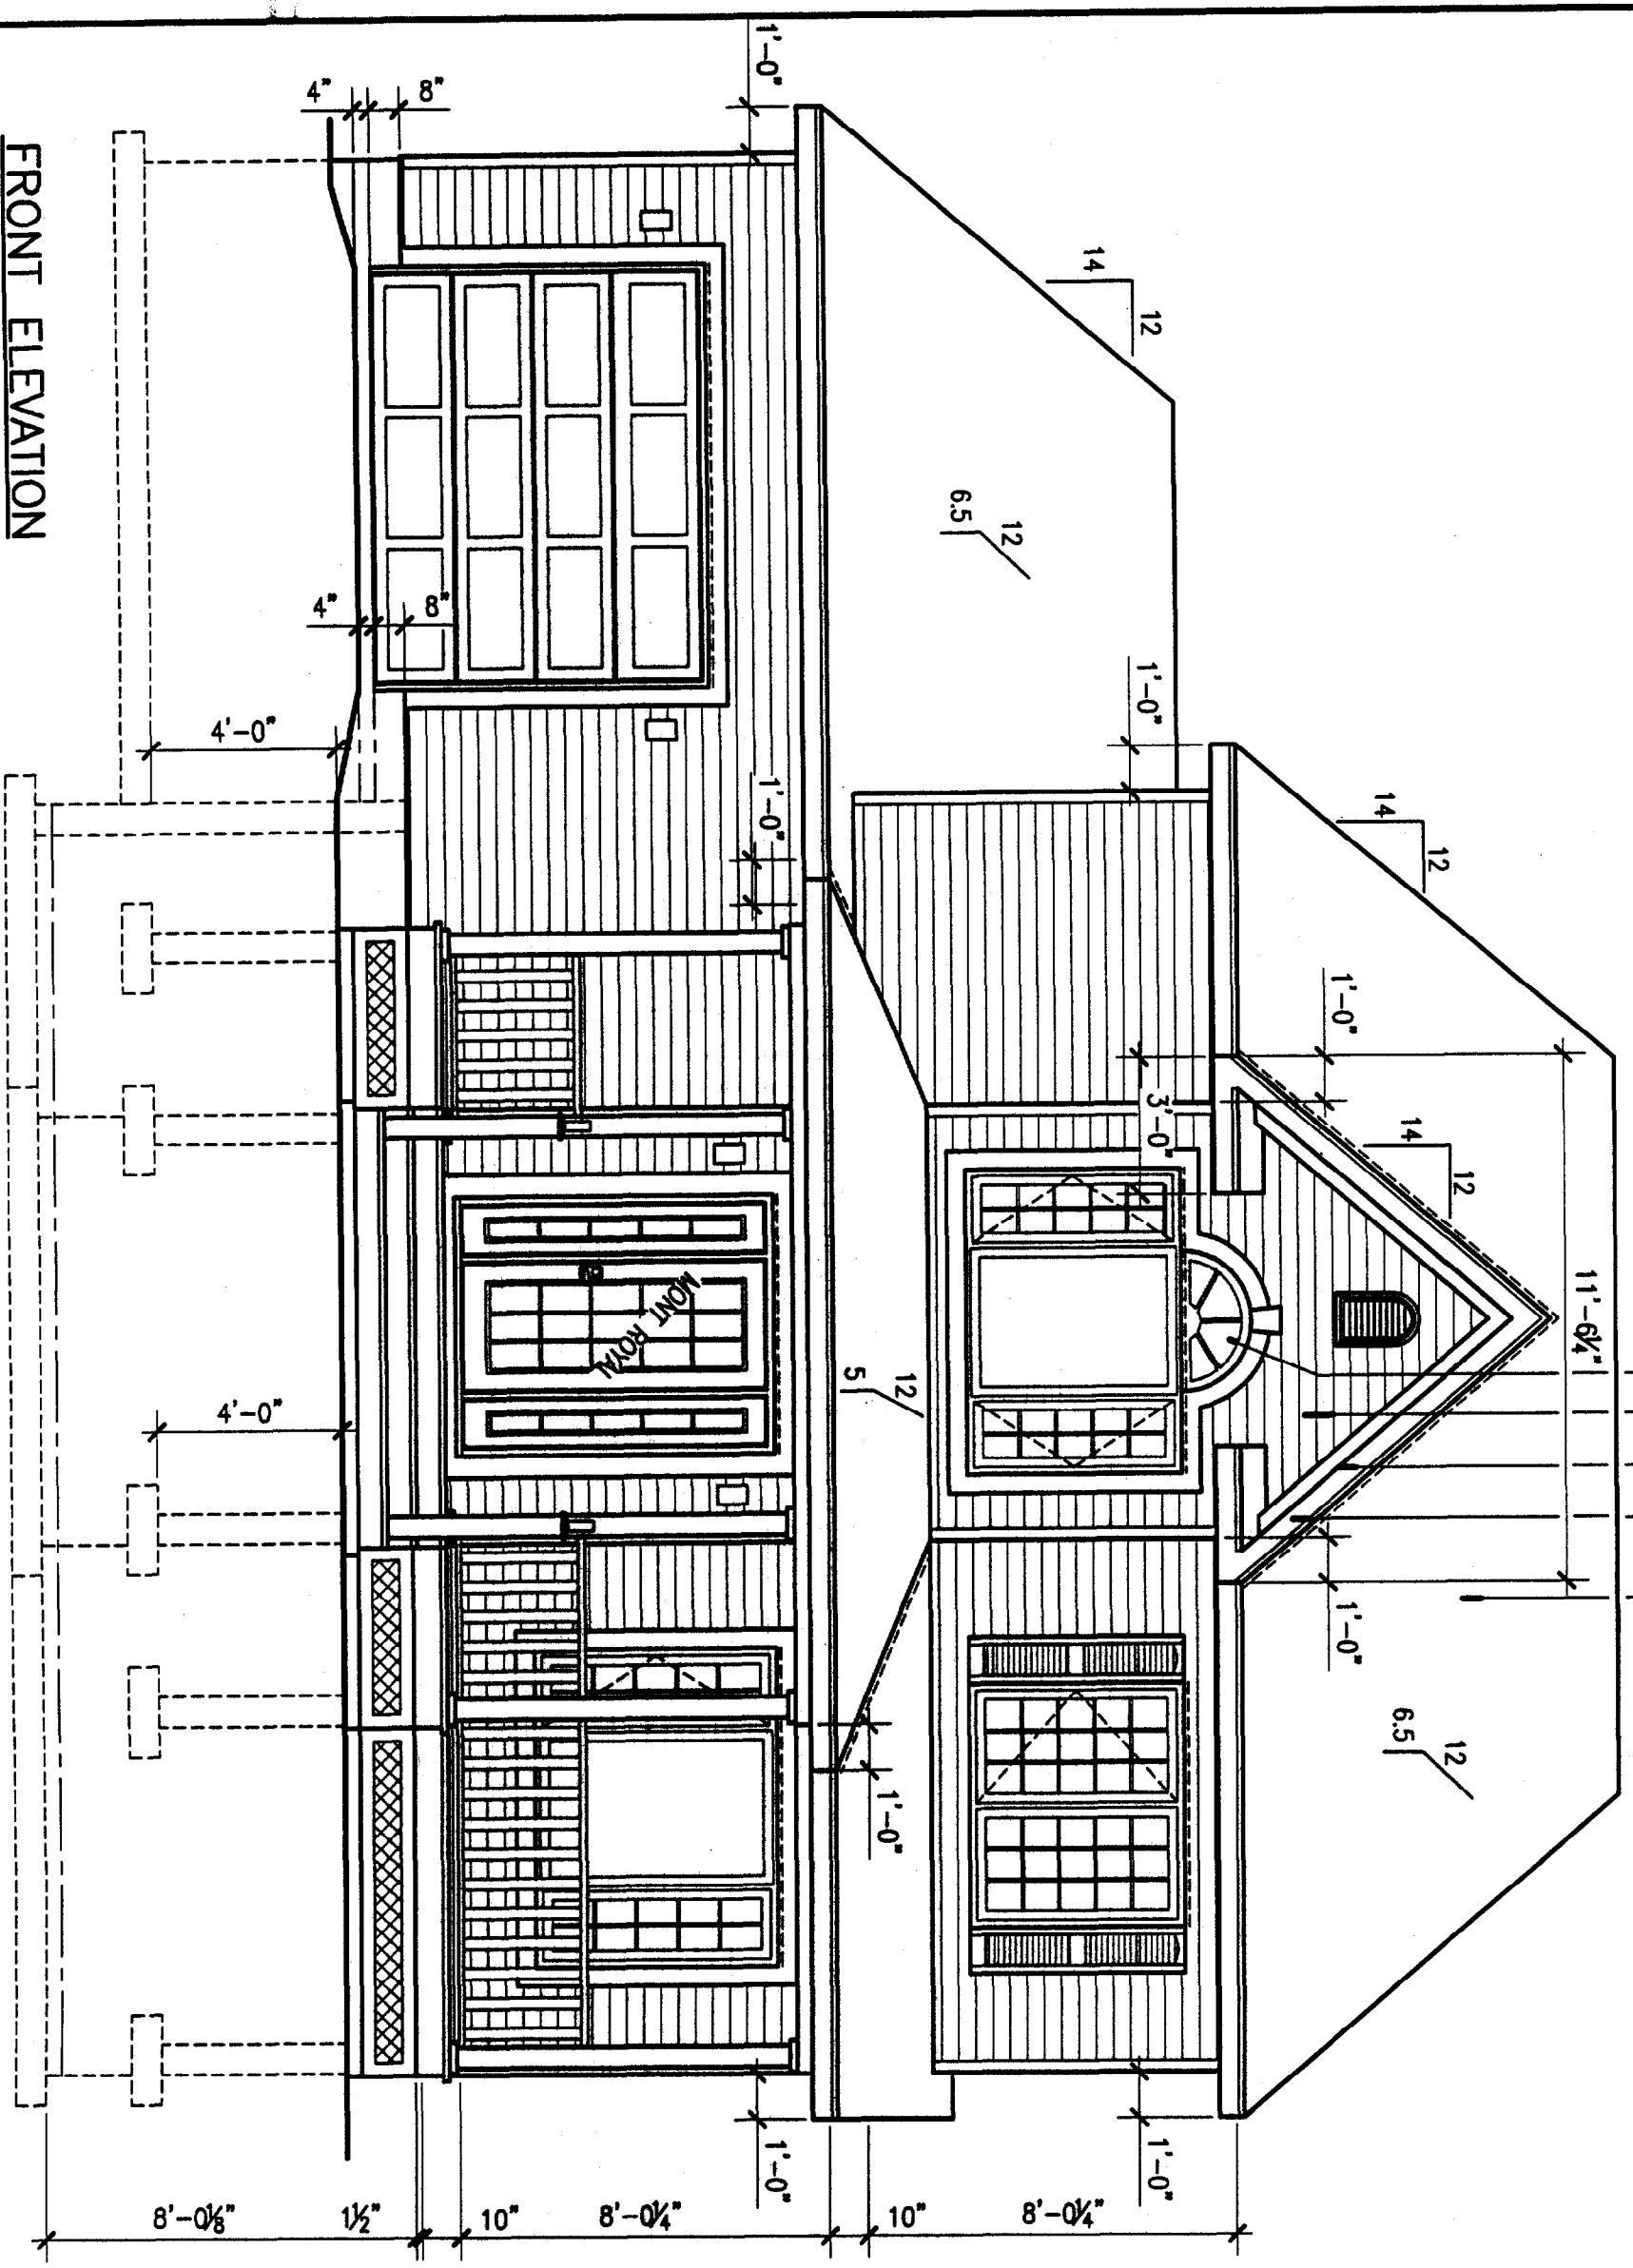

FRONT ELEVATION

NOTICE

THE CONTRACTOR SHOULD CAREFULLY VERIFY THE MEASUREMENTS AND DETAILS OF THE PLAN AND ADVISE "LES HABITATIONS TECHNIQUES LITE" OF ALL ERRORS AND LACK OF DETAILS BEFORE THE PRODUCTION OF HOUSES.

ALL REPRODUCTION IN TOTAL OR PARTIAL OF THESE PLANS IS STRICTLY PROHIBITED UNLESS A WRITTEN PERMISSION OF "LES HABITATIONS TECHNIQUES LITE".

ONLY "LES HABITATIONS TECHNIQUES LITE" HAS THE RIGHTS TO USE THESE PLANS FOR THE CONSTRUCTION OF HOUSES.

REVISION: 08/28/2003
 REVISION: 07/11/2003
 REVISION: 07/11/2003

HABITEC 2000

ADVANCED QUALITY CUSTOM HOMES


JOCELYNE DERAFPE C-00254

Echelle: 1/4"=1'-0"	Dessiné par: C.L.	App. par:
Date: 06/26/2003	Plan: FRONT ELEVATION	Page: 3

NOTICE

THE CONTRACTOR SHOULD CAREFULLY VERIFY THE MEASUREMENTS AND DETAILS OF THE PLAN AND ADVISE LES HABITATIONS TECHNIQUES LITE OF ALL ERRORS AND LACK OF DETAILS BEFORE THE PRODUCTION OF HOUSES.
 ALL REPRODUCTION IN TOTAL OR PARTIAL OF THESE PLANS IS STRICTLY PROHIBITED UNLESS A WRITTEN PERMISSION OF LES HABITATIONS TECHNIQUES LITE.
 ONLY LES HABITATIONS TECHNIQUES LITE HAS THE RIGHTS TO USE THESE PLANS FOR THE CONSTRUCTION OF HOUSES.

- ASPHALT SHINGLES
- ALUMINUM FASCIA
- VENTILATED SOFFIT
- VINYL SIDING

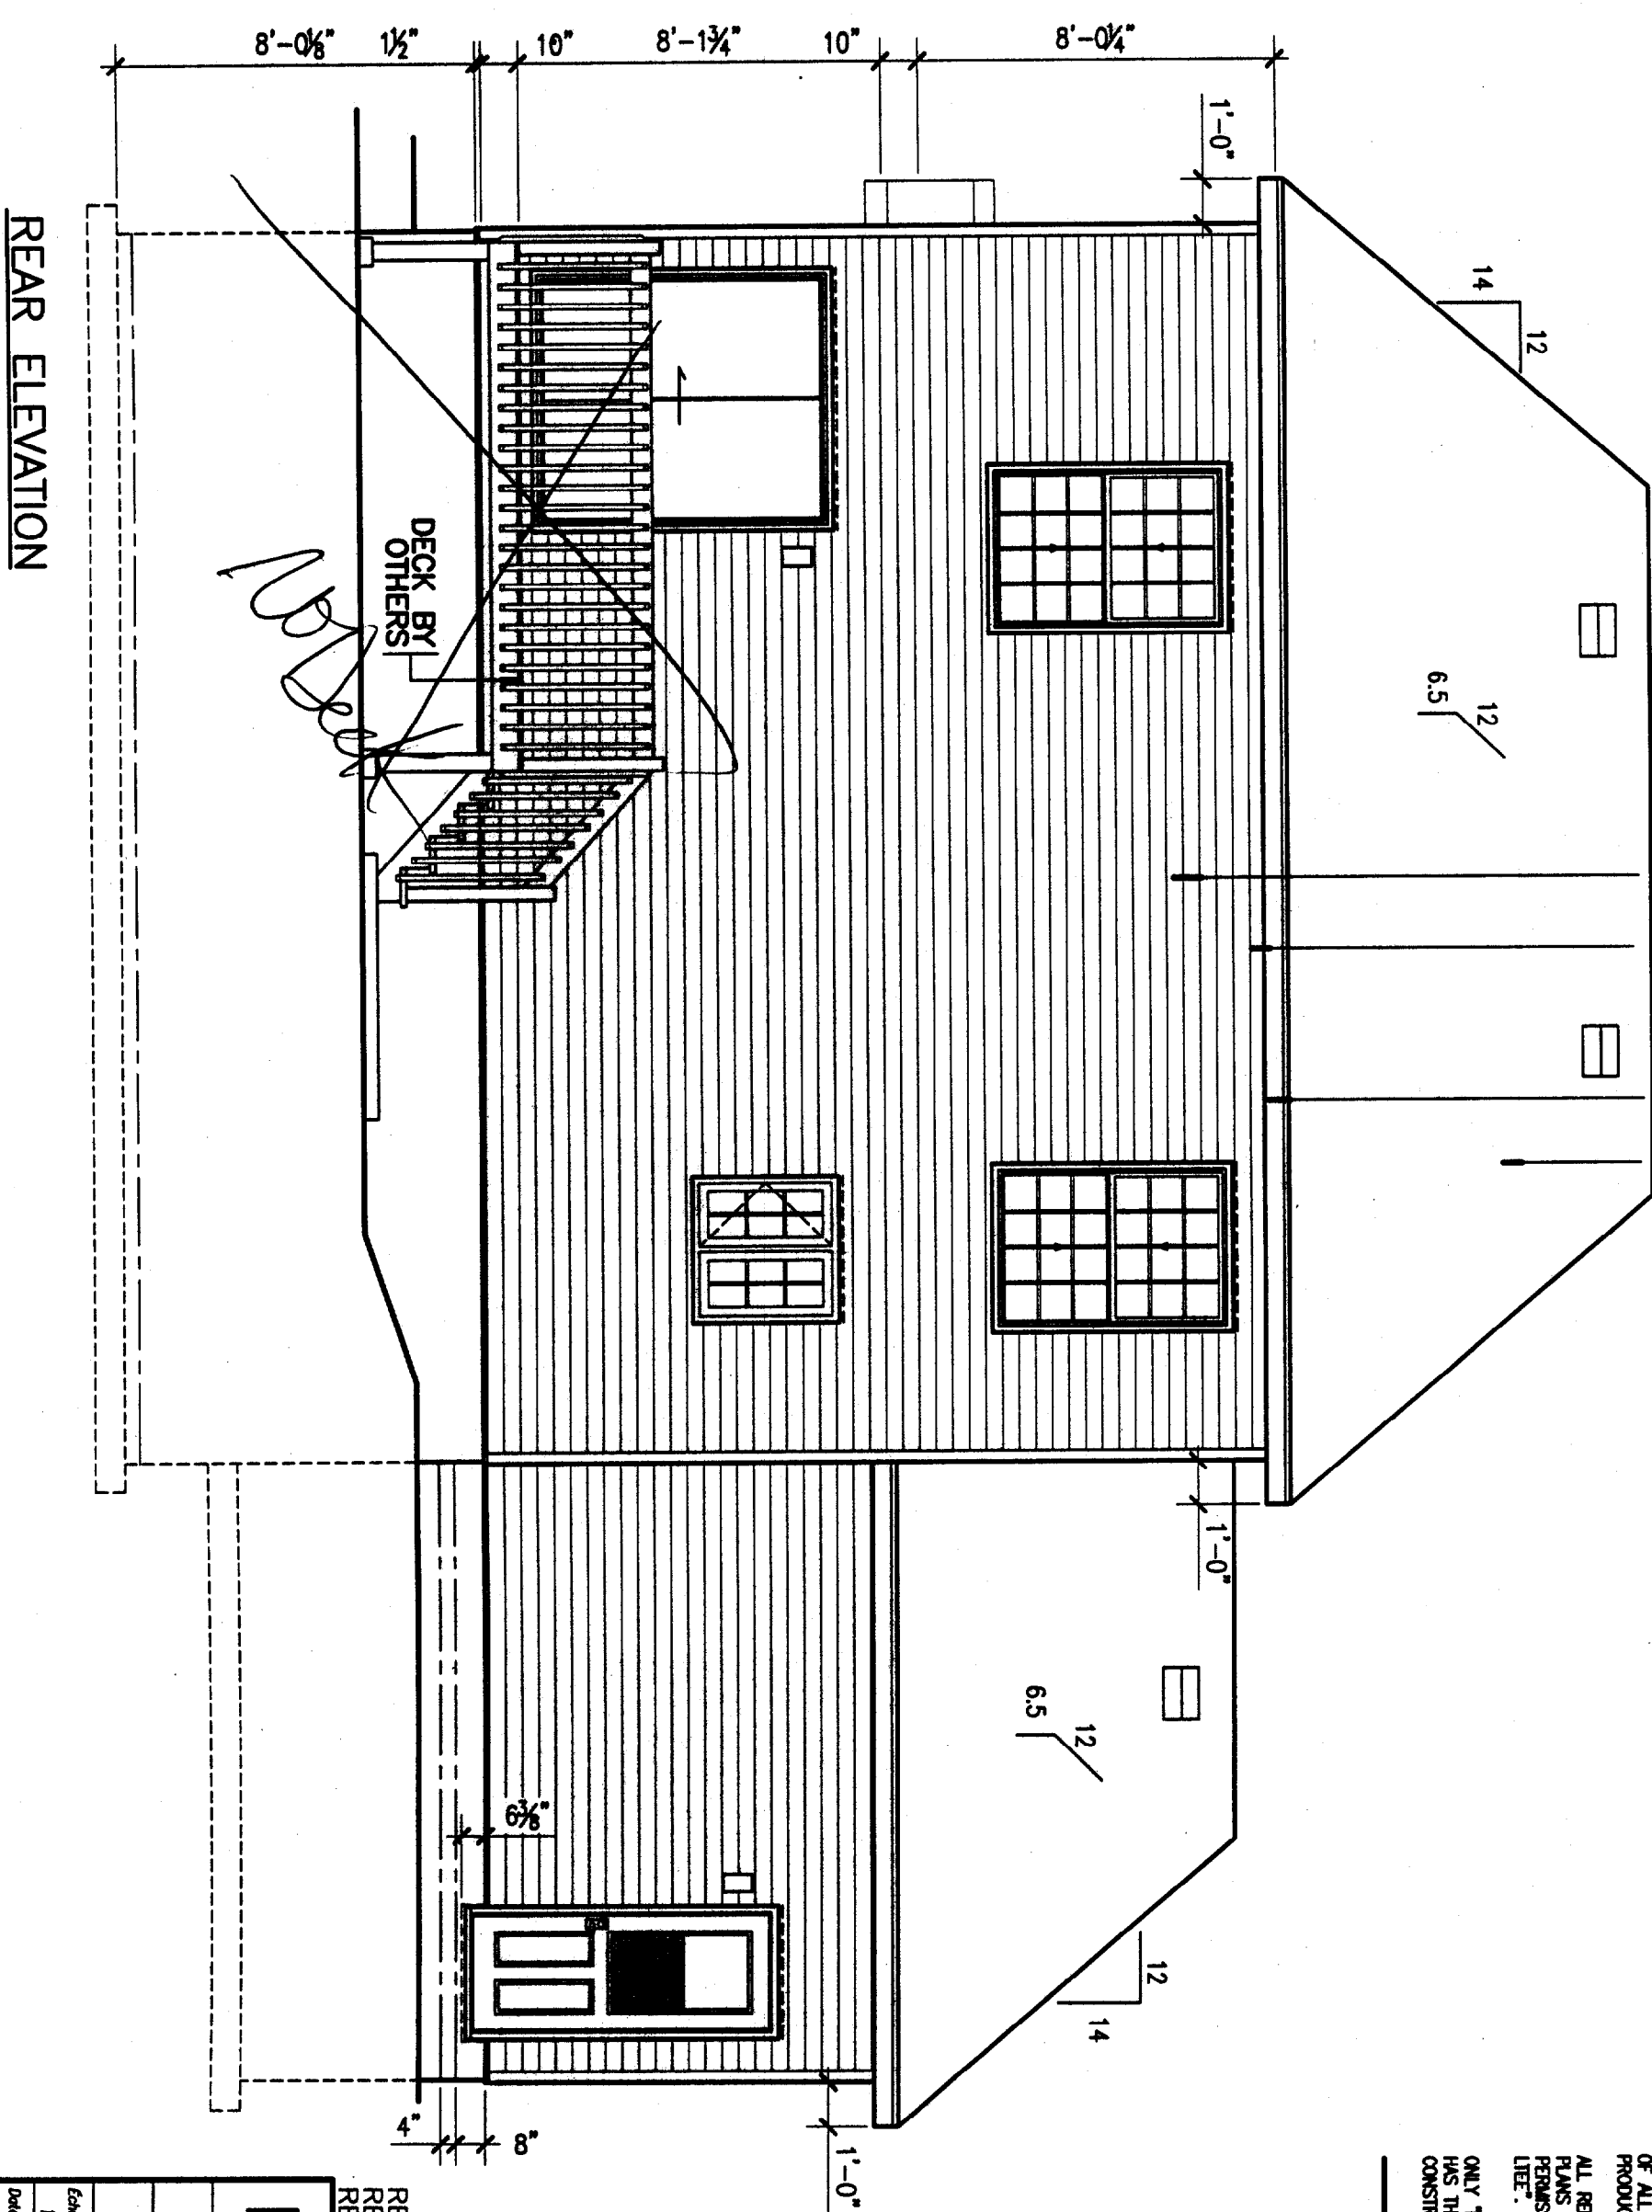

REAR ELEVATION

HABITEC 2000

ADVANCED QUALITY CUSTOM HOMES

JOCELYNE DERASPE

C- 00254

Scale: 1/4"=1'-0"


Drawn by: G.L.

Date: 06/26/2003

Plan: REAR ELEVATION




Page: 5

REVISION: 08/18/2003
 REVISION: 07/11/2003
 REVISION: 07/01/2003

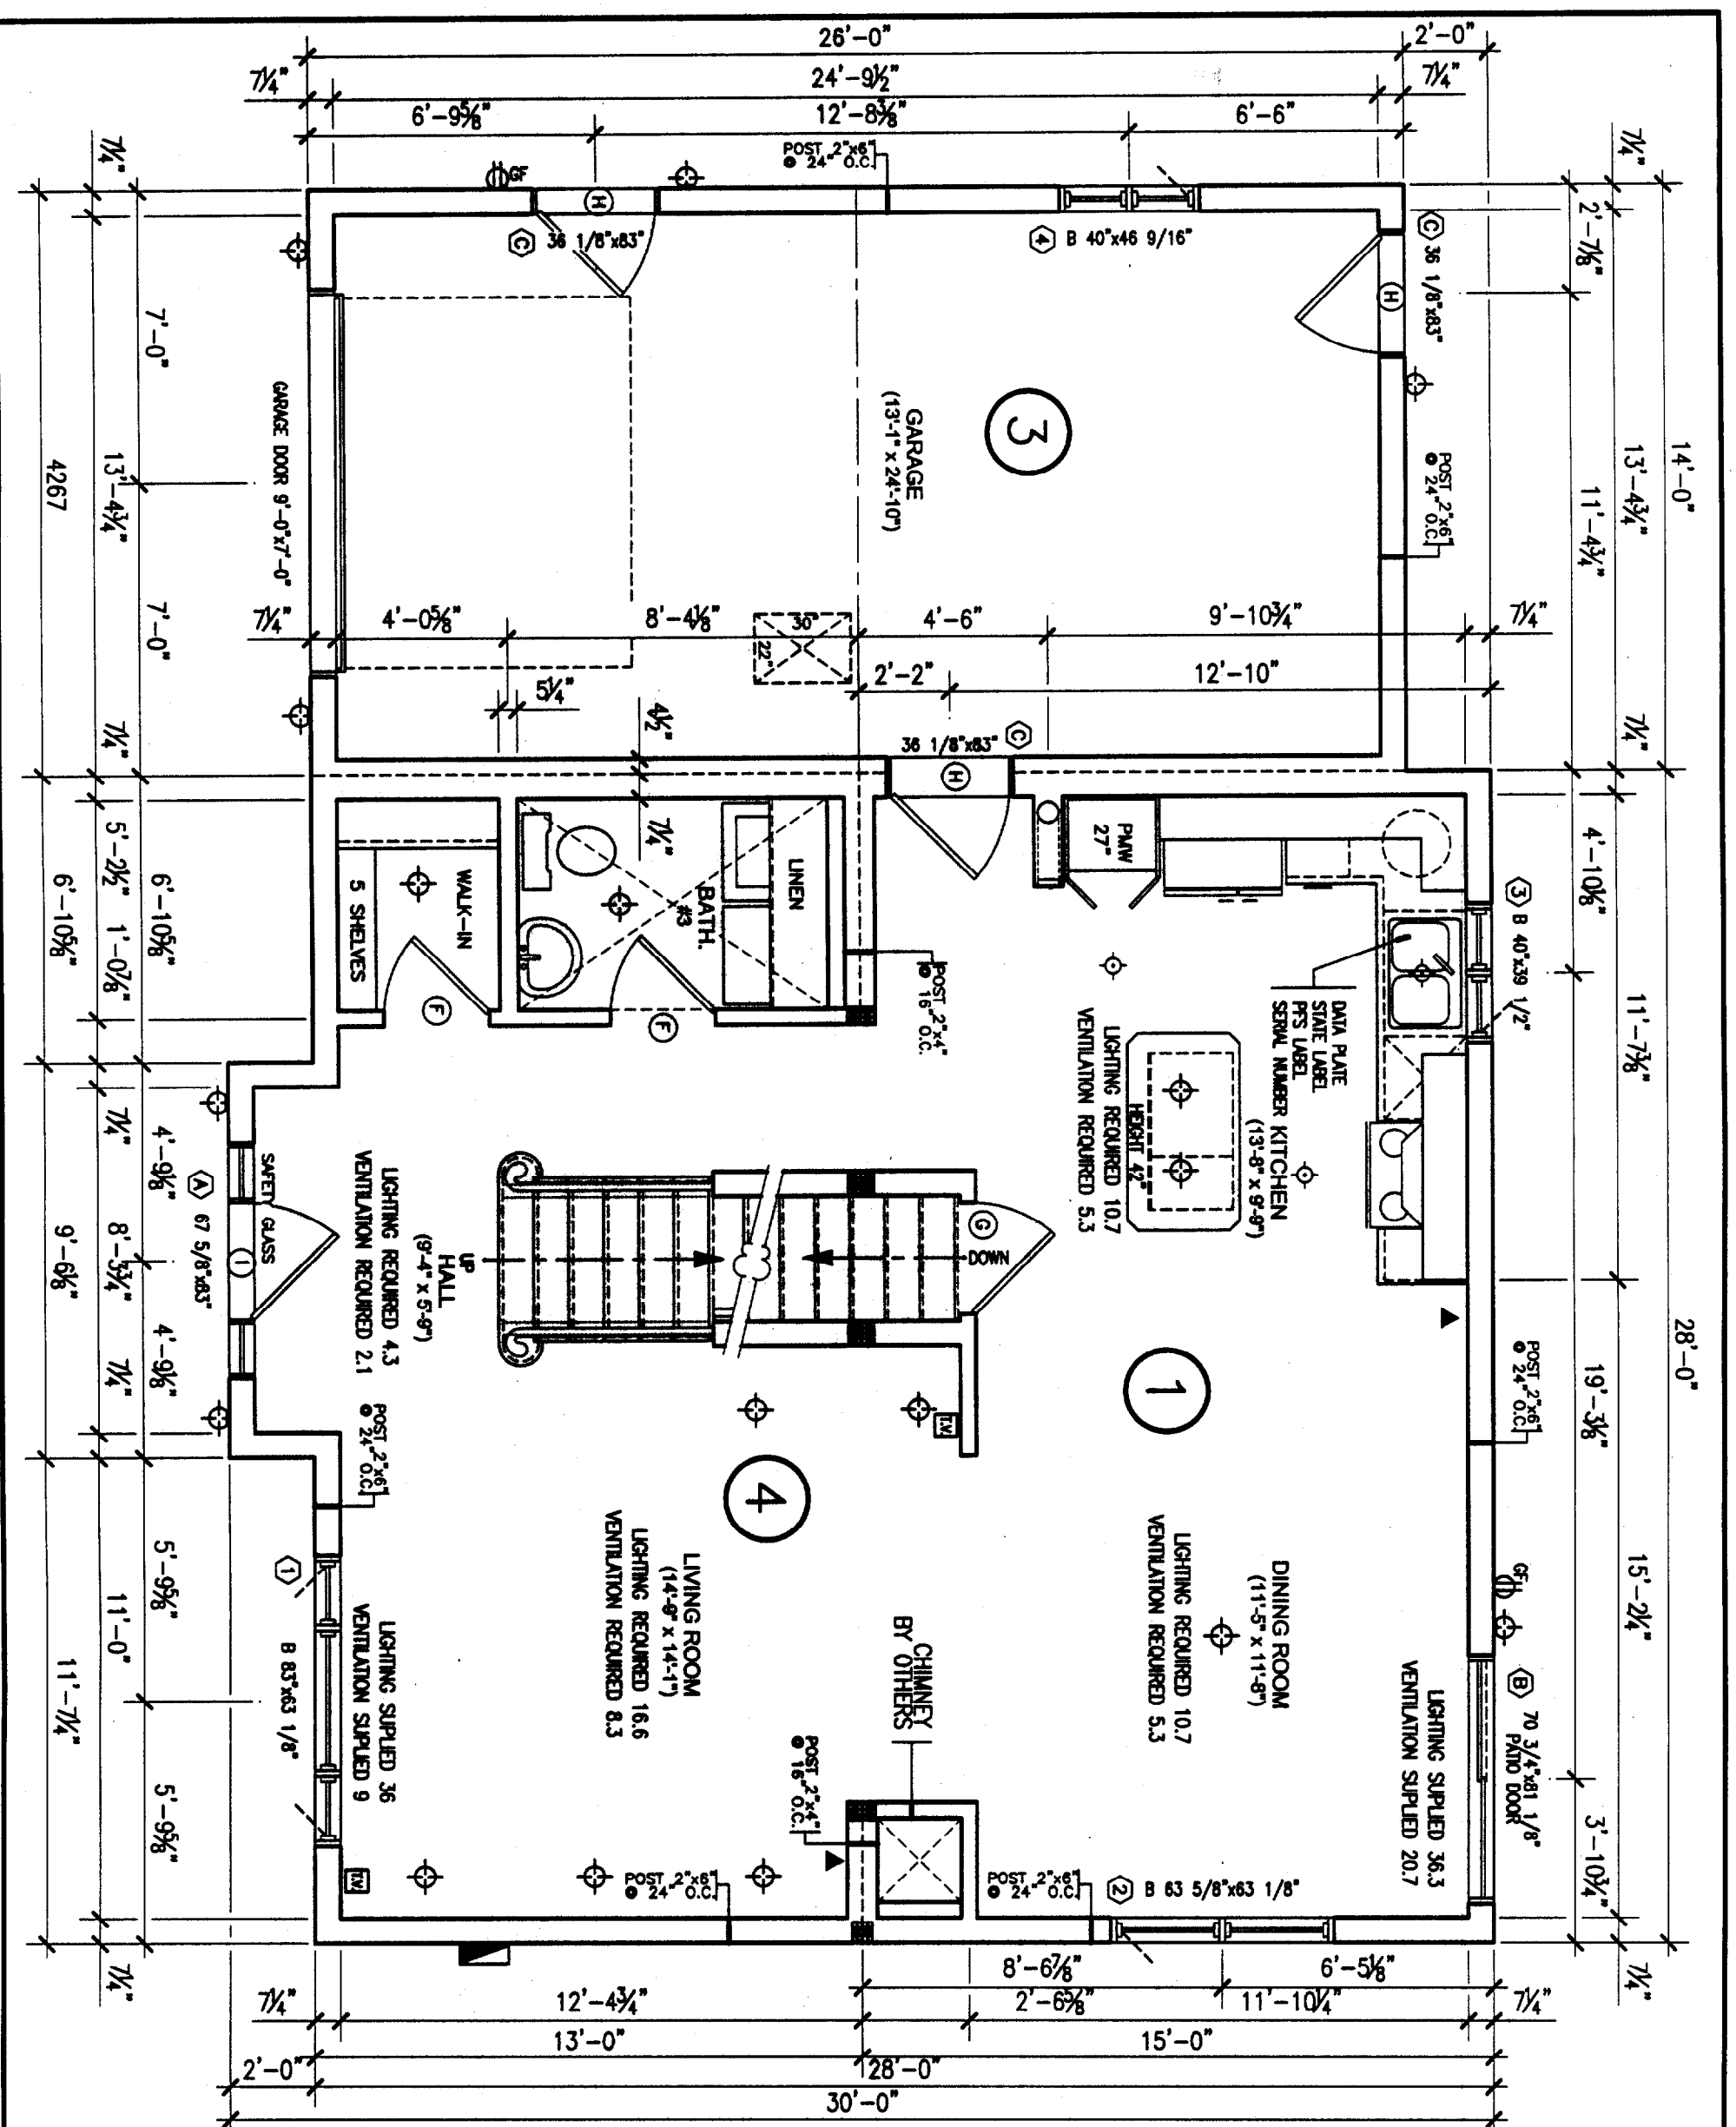

SYMBOLS

- BATHUB FAUCETS ACCESS
- - VENT PIPE
- ⊙ - AIR INLET
- ⊠ - ACCESS TO ATTIC - 22"x30"

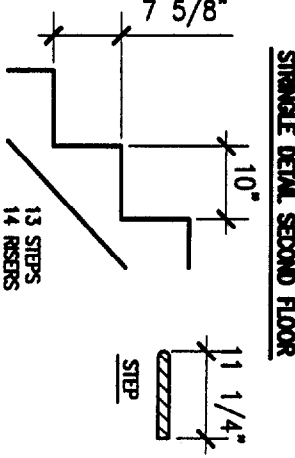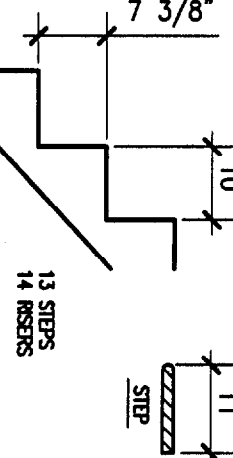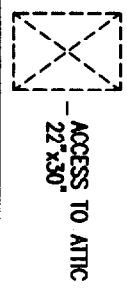

DOORS SCHEDULE

- (A) - 406mm. (16")
- (B) - 457mm. (18")
- (C) - 508mm. (20")
- (D) - 610mm. (24")
- (E) - 711mm. (28")
- (F) - 762mm. (30")
- (G) - 813mm. (32")
- (H) - 864mm. (34")
- (I) - 915mm. (36")
- (J) - 1219mm. (48")
- (K) - 1524mm. (60")
- (L) - 1829mm. (72")

FOR THE STATE OF MAINE, FOR BASEMENT HEIGHTS FROM 7'-3" TO 8'-0", BASEMENT STAIRS ARE A COMPONENT OF THIS DESIGN WITH A MAXIMUM RISER HEIGHT OF 8 1/4". A MINIMUM TREAD DEPTH OF 9" AND A 1" NOSING WILL BE PROVIDED ON ALL TREADS WITH TREAD WIDTH LESS THAN 10"

REVISION: 08/18/2003
 REVISION: 07/11/2003
 REVISION: 07/01/2003


HEBITEC 2000

ADVANCED QUALITY CUSTOM HOMES

JOCELYNE DERGISE

C-00254

Scale:	1/4"=1'-0"	Drawn per:	C.L.	App. per:	
Date:	06/25/2003	Print:	FIRST FLOOR	Page:	7

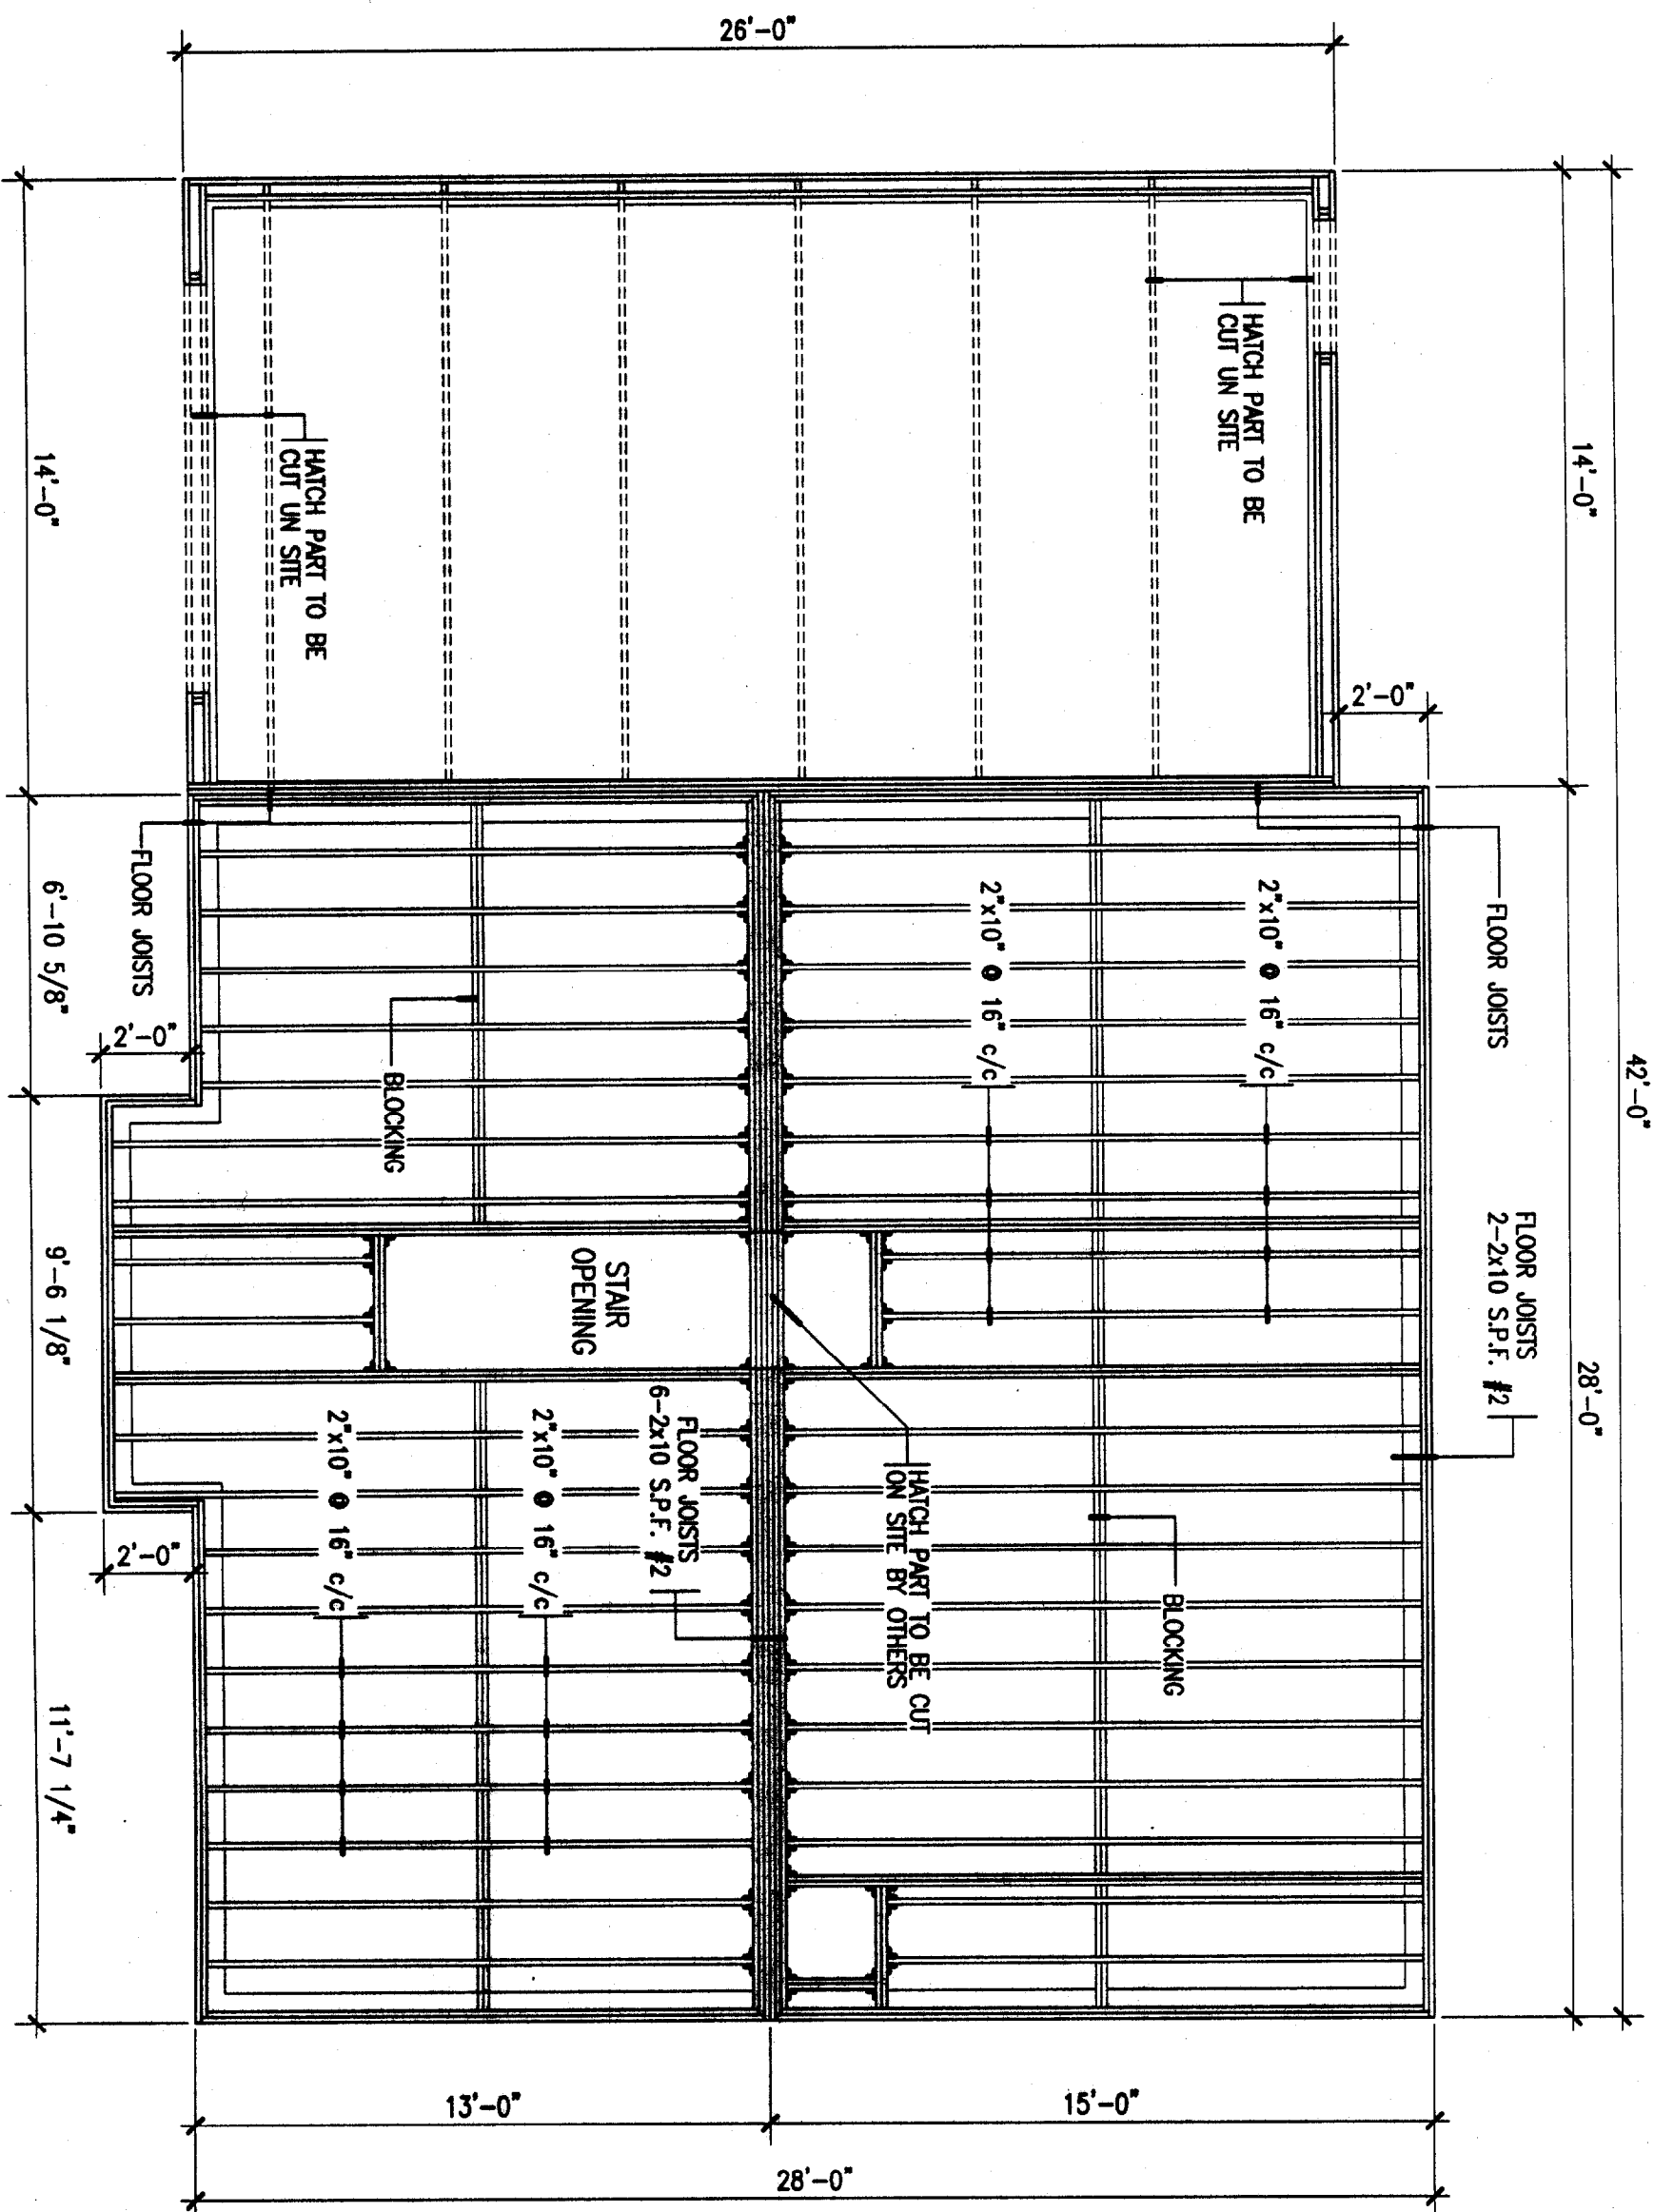

FLOOR FRAMING PLAN
FIRST FLOOR

• JOIST HANGER


HABITEC 2000	
ADVANCED QUALITY CUSTOM HOMES	
JOCELYNE DERASPE	C- 00254
Scale: 1/4"=1'-0"	Drawn per: G.L.
Date: 06/25/2003	Proj: FRAMING
	Page: 9

OUTSIDE FRAME MEASUREMENTS	GLASS SIZE	SCREEN SIZE	OPENING (TO GO OUT) WIDTH X HT	PRODUCT
67 5/8" x 83"	23" x 65"	23" x 8"	36" x 81"	STEEL FLOOR
70 3/4" x 81 1/8"	30 1/4" x 72 7/8"	30 7/8" x 75"	29 1/4" x 76 7/8"	PATIO DOOR
36 1/8" x 83"	23" x 37"	23" x 19"	34" x 81"	STEEL DOOR

DOORS SCHEDULE

OUTSIDE FRAME MEASUREMENTS	GLASS SIZE	SCREEN SIZE	OPENING (TO GO OUT) WIDTH X HT	PRODUCT
83" x 63 1/8"	26.0 SQ. FT.	6.0 SQ. FT.	3.95 SQ. FT.	CASEMENT
63 5/8" x 63 1/8"	10.0 SQ. FT.	10.75 SQ. FT.	8.65 SQ. FT.	CASEMENT *
40" x 39 1/2"	3.13 SQ. FT.	3.5 SQ. FT.	2.33 SQ. FT.	CASEMENT
40" x 46 9/16"	3.88 SQ. FT.	4.38 SQ. FT.	2.87 SQ. FT.	CASEMENT
79 7/8" x 56 1/16"	21.38 SQ. FT.	5.63 SQ. FT.	3.68 SQ. FT.	CASEMENT
63 5/8" x 56 1/16"	8.63 SQ. FT.	9.25 SQ. FT.	7.47 SQ. FT.	CASEMENT *
46 1/4" x 64 15/16"	16.0 SQ. FT.	16.5 SQ. FT.	6.8 SQ. FT.	DOUBLE HUNG *

WINDOWS SCHEDULE

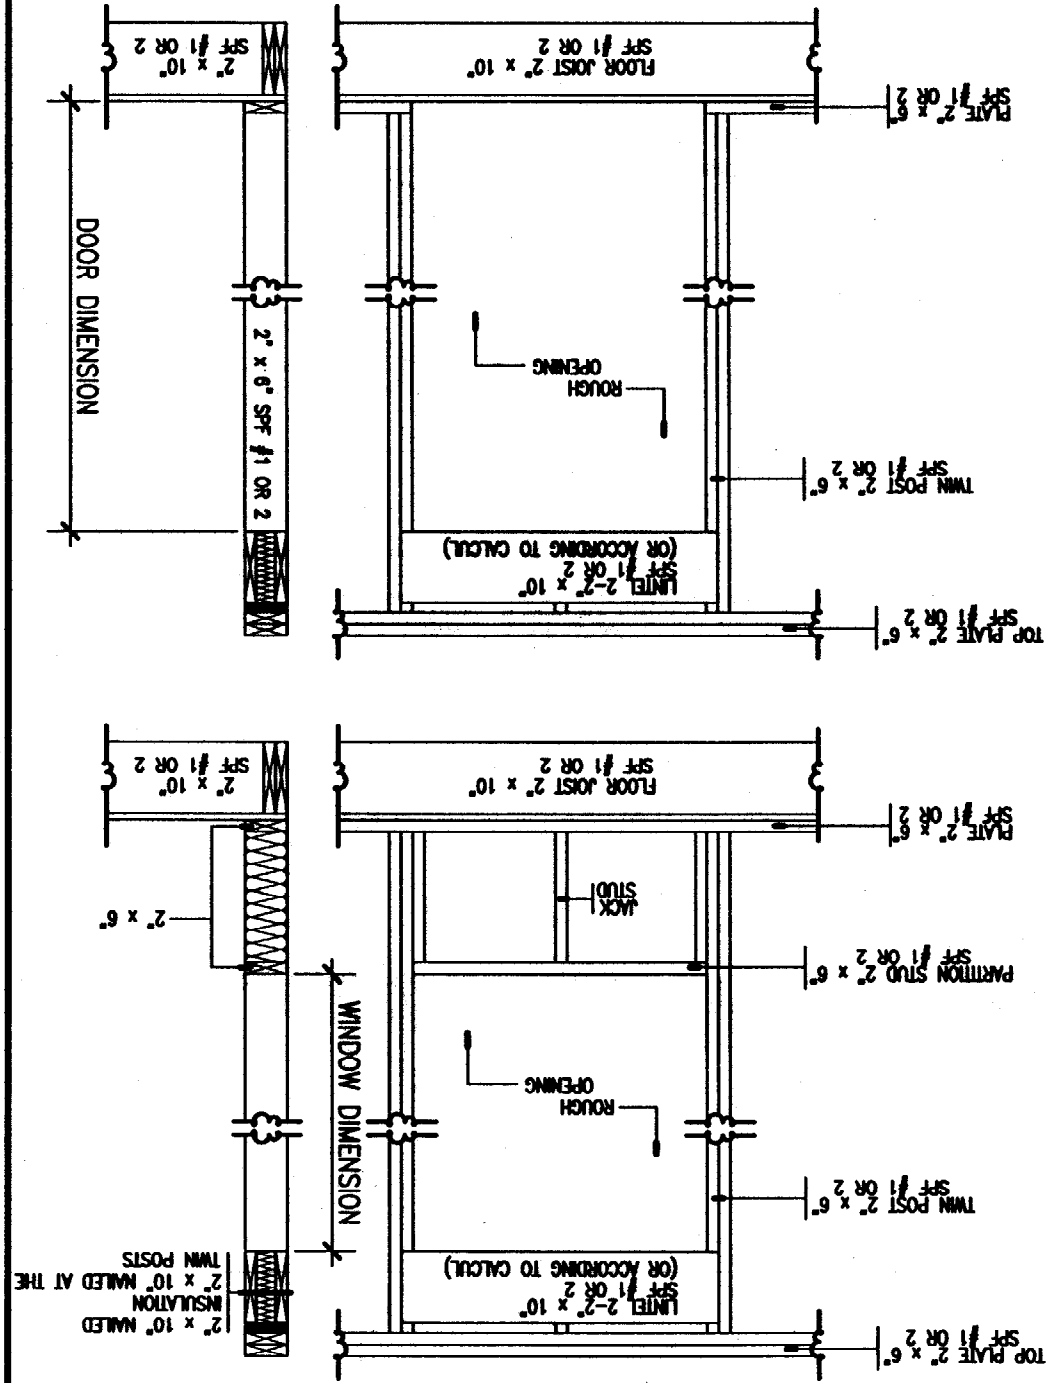



LINTEL DETAILS

REV.	REVISION	DATE	PAR
REV.	REVISION	JAN. 97	S.B.
REV.	REVISION	MARCH 99	S.B.

DATE:	09/13/2003
SCALE:	1:12.5
DR. BY:	S.B.
APP. BY:	N.C.
PROJECT:	JOCELYNE DERASPE
NO.:	C-00254
FIG. NO.:	13
CROSS SECT.:	TYPICAL

HABITEC 2000
 ADVANCED QUALITY CUSTOM HOMES
 JOCELYNE DERASPE
 C-00254

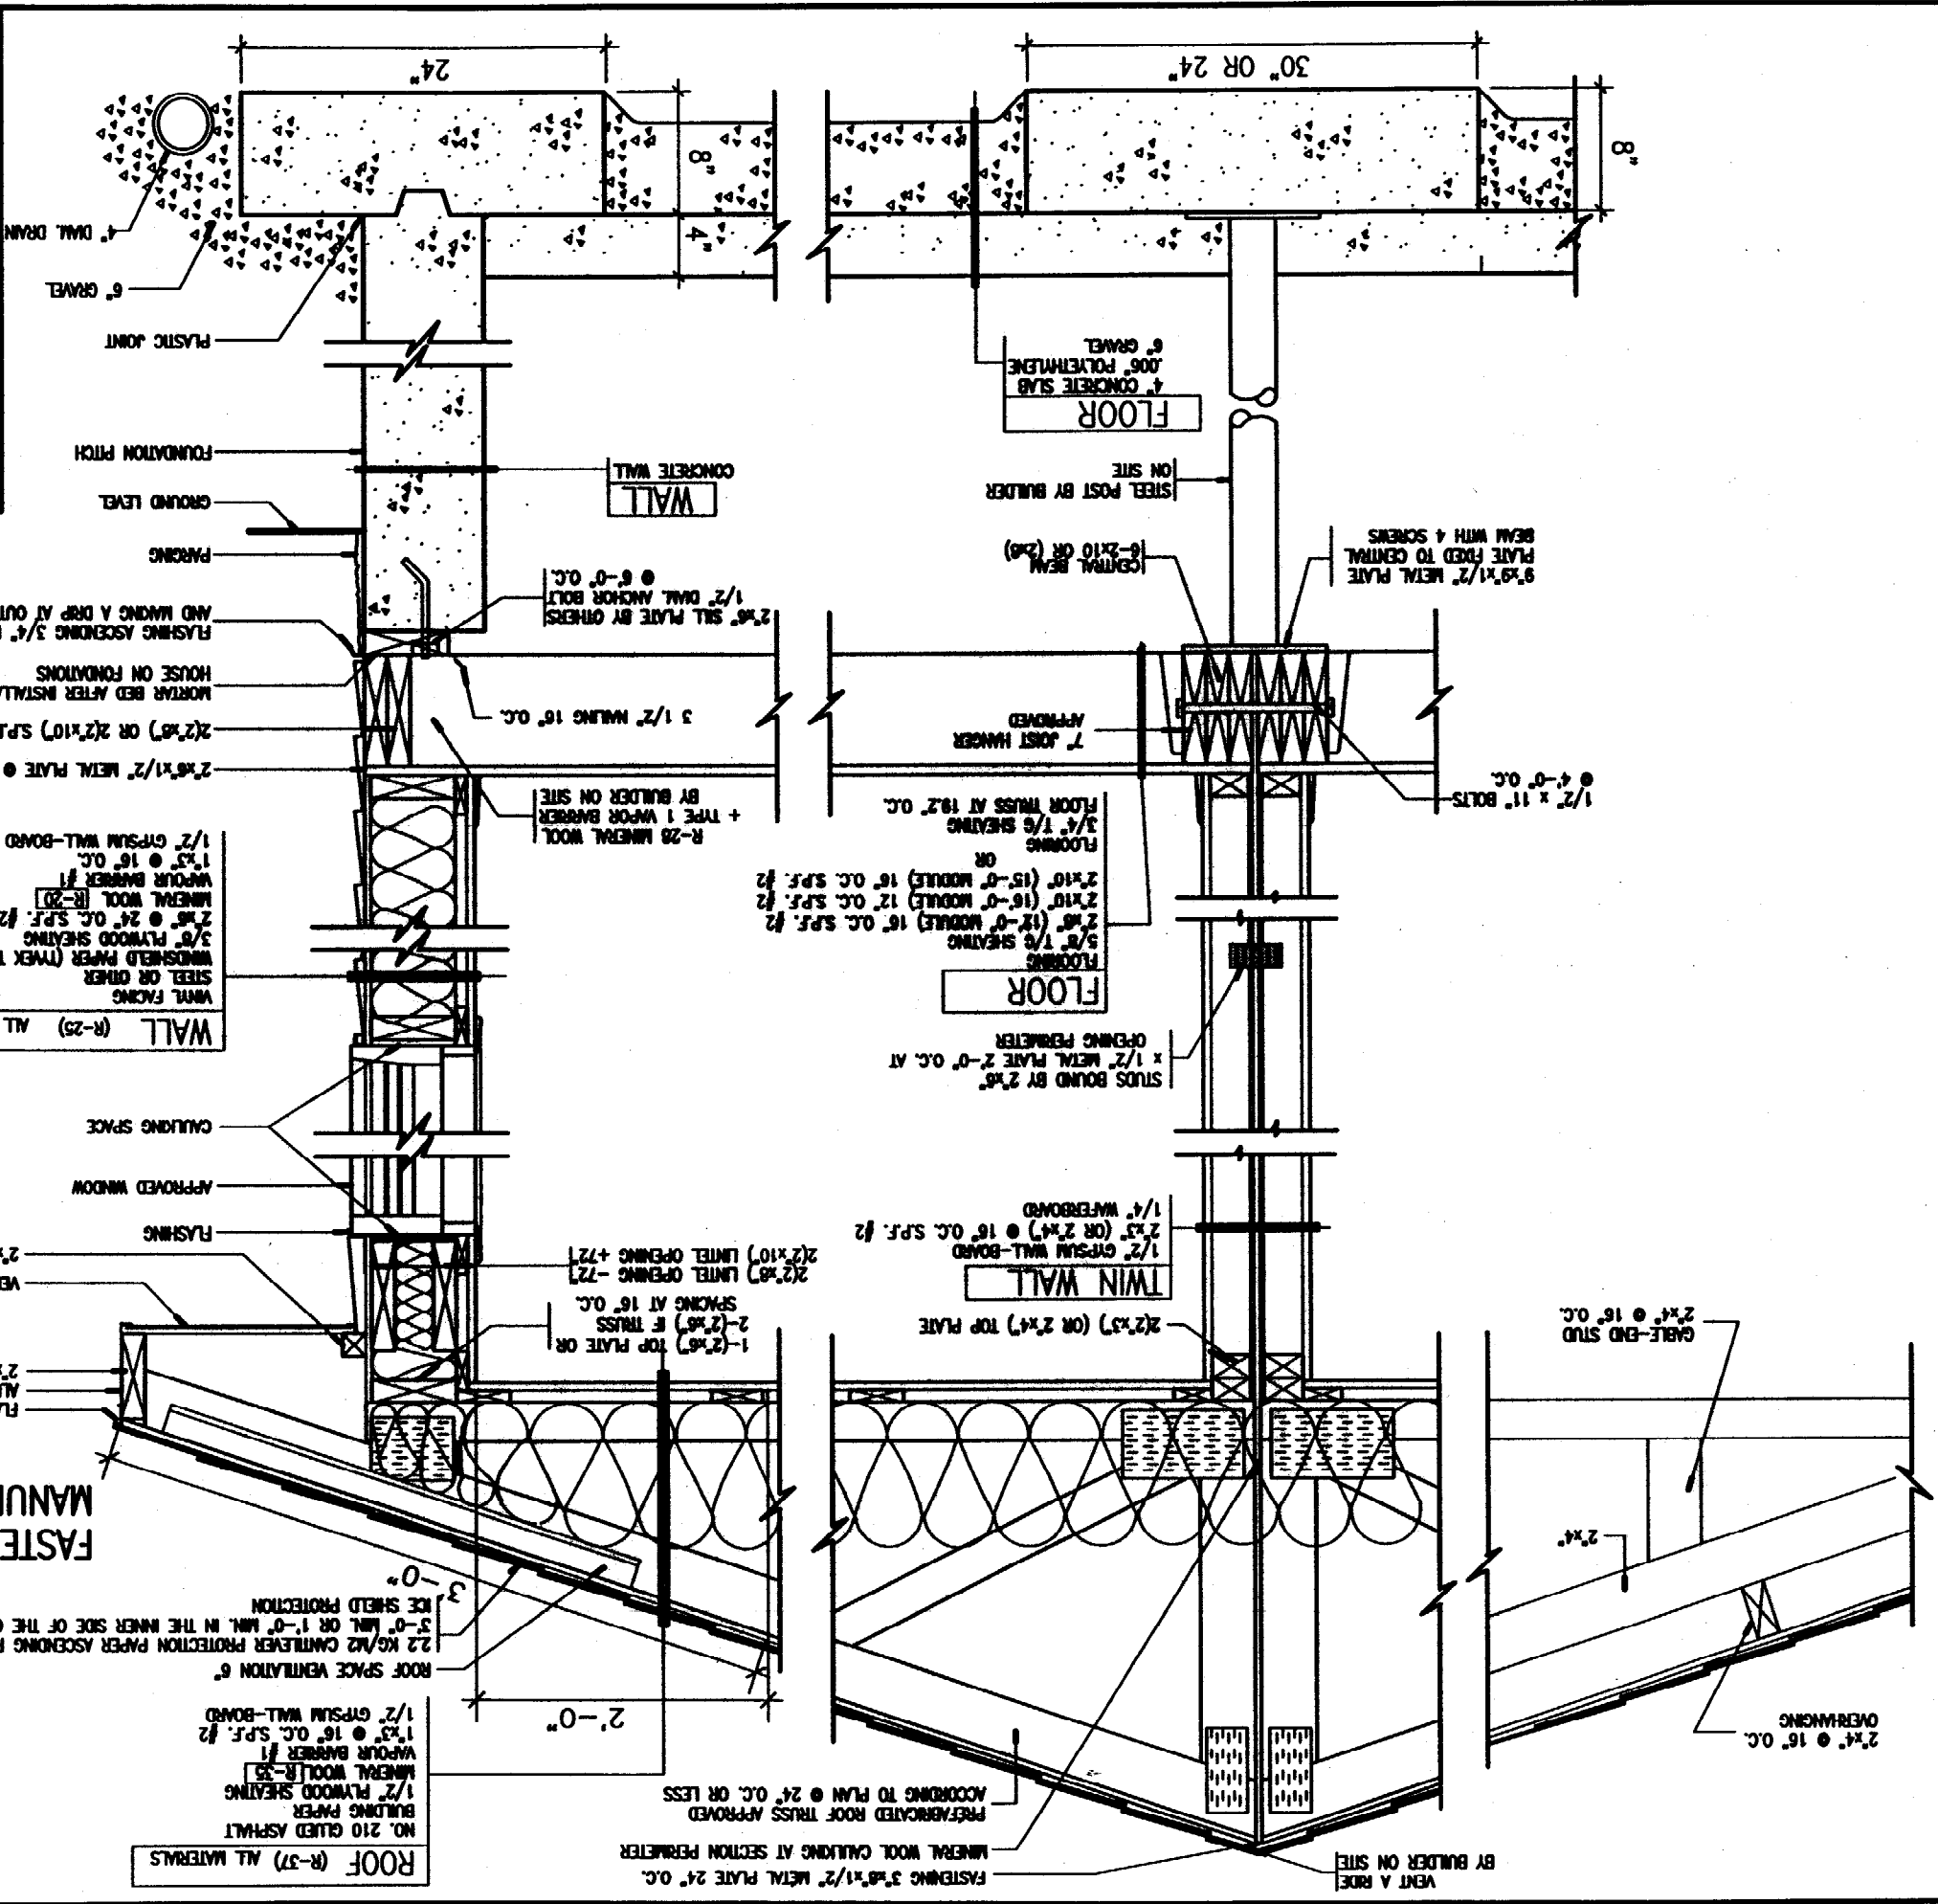

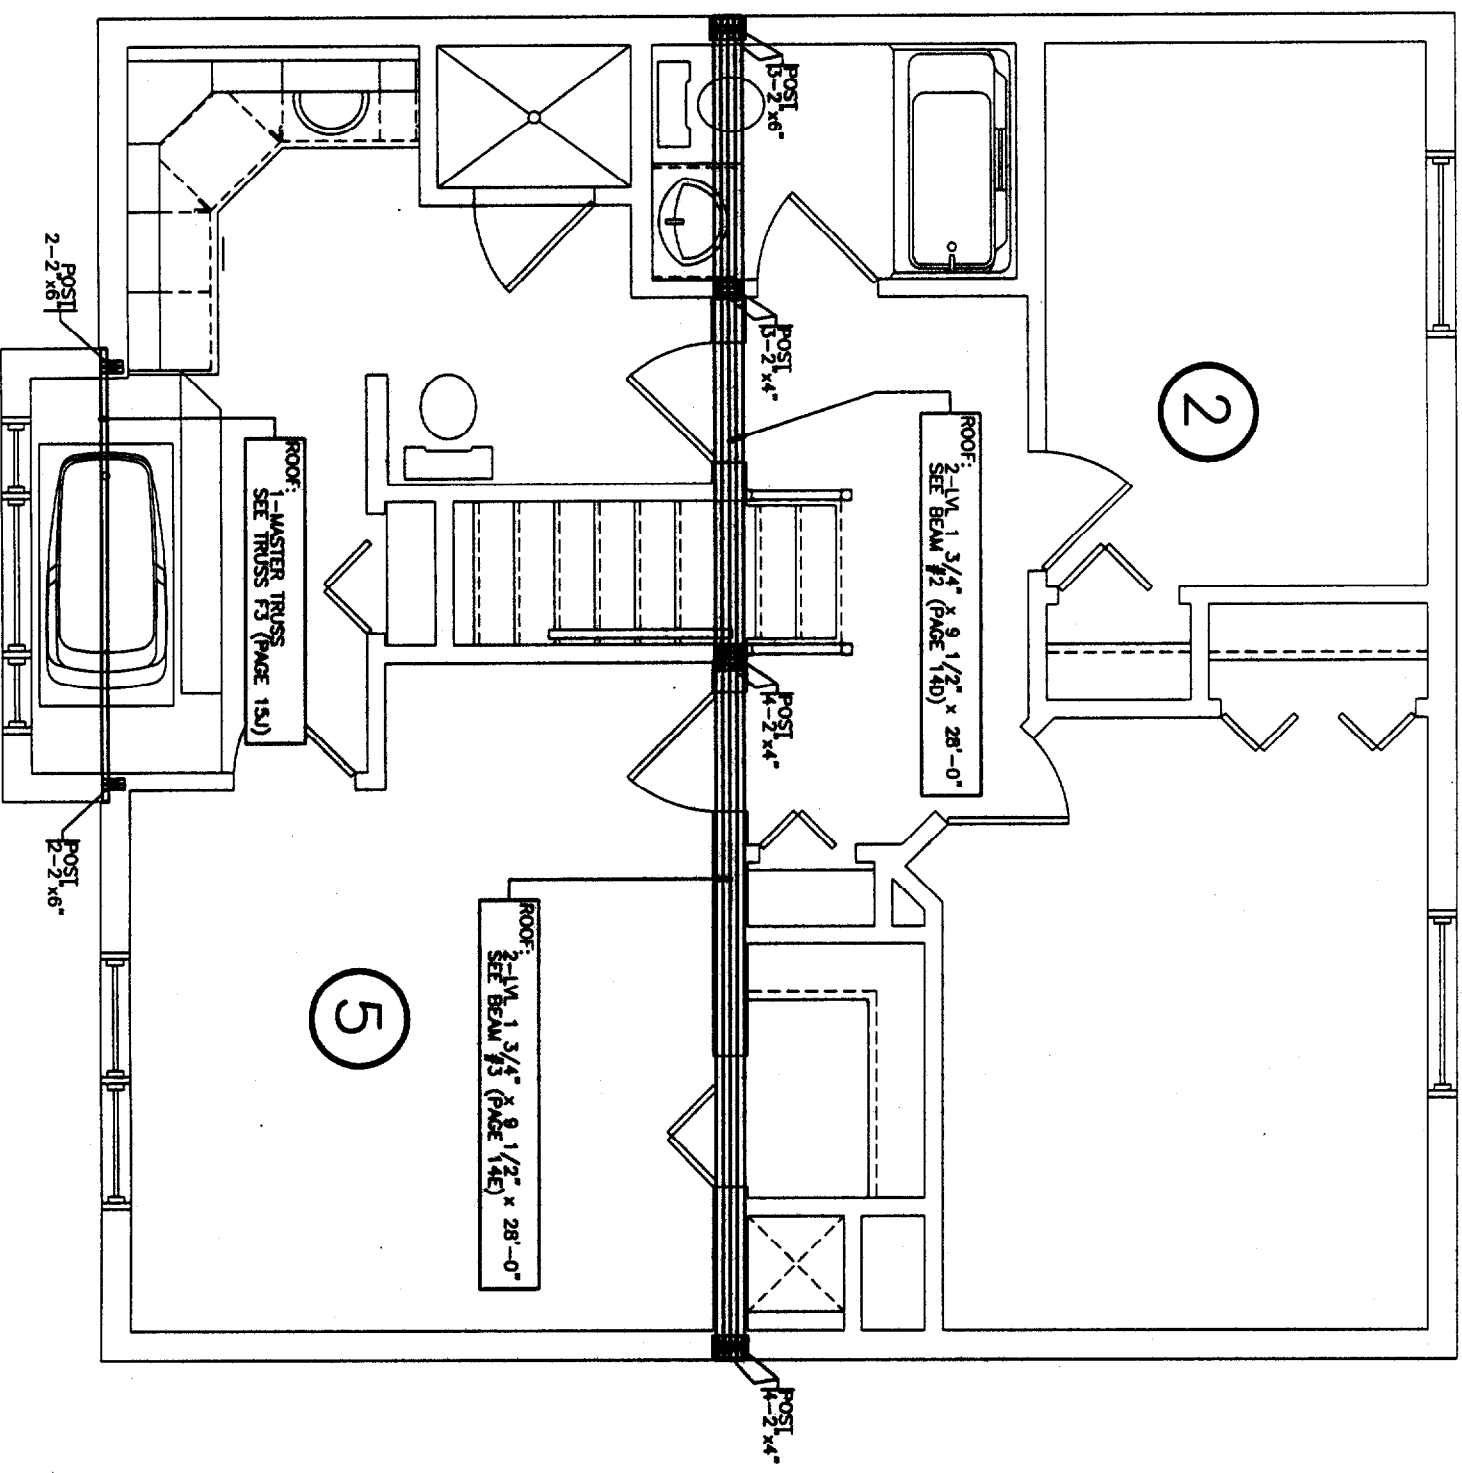

HABITEC 2000®

ADVANCED QUALITY CUSTOM HOMES

JOCELYNE DERASPE C- 00254

Echelle: 1/4"=1'-0"	Dessiné par: S.B.	App. par:
Date: 09/13/2003	Plan: BEAM SECOND FL.	Page: 14B

GOODLAM	COMPANY Goodlam Division Tel. 1-800-361-6503 Fax 1-450-635-3728 Sep. 9, 2003 10:37:12	PROJECT <div style="border: 1px solid black; width: 20px; height: 20px; text-align: center; margin: 0 auto;">20</div> 03-2073a.wvb
----------------	---	---

Design Check Calculation Sheet

LOADS: (lbs, psf, or plf)

Load	Type	Distribution	Magnitude		Location [ft]		Pattern Load?
			Start	End	Start	End	
1	Dead	Partial UDL	127	127.00	0.00	5.00	No
2	Snow	Partial UDL	391	391.00	0.00	5.00	No
3	Dead	Partial UDL	117	117.00	5.00	23.00	No
4	Snow	Partial UDL	363	363.00	5.00	23.00	No
5	Dead	Partial UDL	127	127.00	23.00	25.00	No
6	Snow	Partial UDL	391	391.00	23.00	25.00	No
7	Dead	Point	347		25.00		No
8	Snow	Point	1073		25.00		No

MAXIMUM REACTIONS (lbs) and BEARING LENGTHS (in) :

Reaction Type	At 0'	At 5'-3/4"	At 13'-5/4"	At 28'
Dead	388	518	1974	707
Live	1119	1487	5712	2026
Total	1507	2006	7687	2732
Bearing Length	1.0	1.0	2.4	1.0

WELDWOOD LVL, 1 3/4" Wide, 2.0E, 1-3/4x9-1/2", 2-Plys

Self Weight of 8.77 plf automatically included in loads;

Load combinations: ASCE 7-05;

SECTION vs. DESIGN CODE NDS-1997: (lbs, lbs-ft, or in)

Criterion	Analysis Value	Design Value	Analysis/Design
Shear	V _{Ed} = 4057	V _r = 7265	V/V _r = 0.56
Bending(+)	M = 9733	M _r = 16109	M/M _r = 0.60
Bending(-)	M = 10470	M _r = 16109	M/M _r = 0.65
Live Defl'n	0.45 = L/384	0.49 = L/360	0.94
Total Defl'n	0.69 = L/253	0.97 = L/180	0.71

ADDITIONAL DATA:

FACTORS:	F	CD	CM	Ct	CL	CF	CV	CEu	Cr	LCI
Fb'+	3100	1.15	1.00	1.00	1.000	1.03	1.000	1.00	1.00	2
Fb'--	3100	1.15	1.00	1.00	1.000	1.03	1.000	1.00	1.00	2
Fv'	285	1.15	1.00	1.00						2
Fcp'	900		1.00	1.00						-
E'	2.0 million		1.00	1.00						2


Bending(+): LCI 2 = D+S, M = 9733 lbs-ft
 Bending(-): LCI 2 = D+S, M = 10470 lbs-ft
 Shear : LCI 2 = D+S, V = 4444, V_{Ed} = 4057 lbs
 Deflection: LCI 2 = D+S EI = 500.14e06 lb-in²/ply
 Total Deflection = 1.50(Dead Load Deflection) + Live Load Deflection.
 (D=dead L=live S=snow W=wind I=impact C=construction CL=concentrated)
 (All LCI's are listed in the Analysis output)

DESIGN NOTES:

- Please verify that the default deflection limits are appropriate for your application.
- BEAMS require restraint against lateral displacement and rotation at points of bearing
- SCL-BEAMS: Structural Composite Lumber design has assumed: - dry service conditions - full lateral support - no preservative or fire-retardant treatment
- no notches - single member use (no load sharing) - the specified dead load is no greater than 1/2 the specified live load
- BUILT-UP SCL-BEAMS: contact manufacturer's LVL user guide for connection details

BEAM #2
 REFER TO PAGE 14B

HABITEC 2000	Date: 09/13/2003 Part: LM Page: 14D
Date: 09/13/2003 Part: CALCUL	ADVANCED QUALITY CUSTOM HOMES JOCELYNE DERASSE

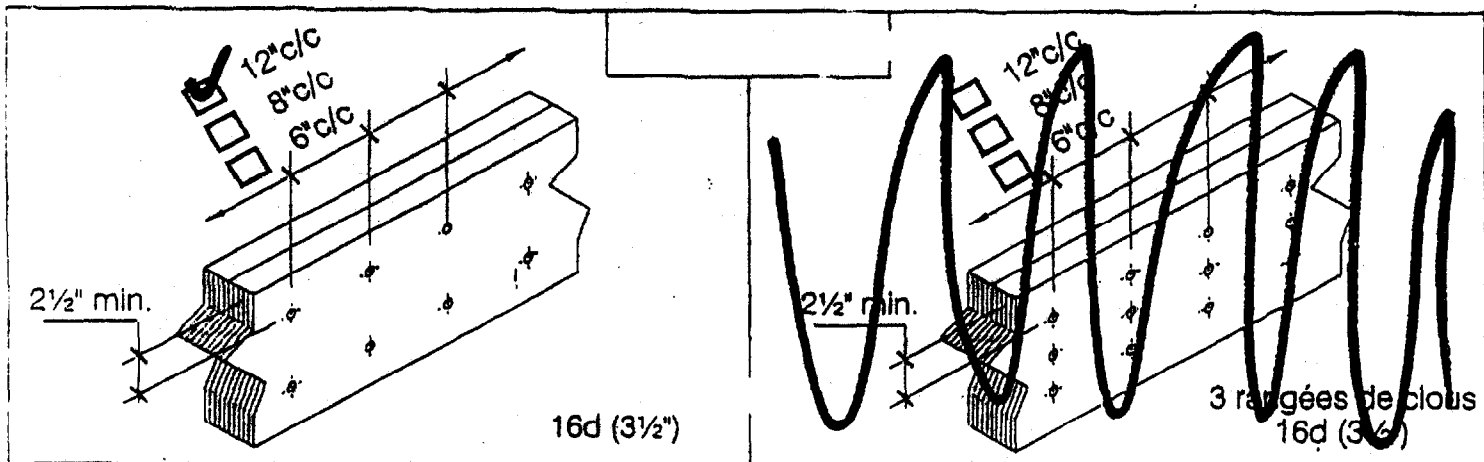



COMPANY
Goodlam Division
Tel. 1-800-361-6503
Fax 1-450-635-3728

PROJECT

Sep. 15, 2003 08:16:54

SECOND FLOOR BEAM.wwb

Design Check Calculation Sheet

LOADS: (lbs, psf, or plf)

Load	Type	Distribution	Magnitude		Location [ft]		Pattern Load?
			Start	End	Start	End	
1	Live	Full UDL	300				Yes
2	Dead	Full UDL	113				No

MAXIMUM REACTIONS (lbs) and BEARING LENGTHS (in) :

	0'	5'-9"	9'-9"	13'-3"	24'-9"	28'
Dead	255	760		1203	1161	
Live	735	2090	1346	3316	3112	471
Uplift			1602			1001
Total	991	2850	1276	4519	4273	326
Bearing Length	1.0	1.8	1.0	2.9	2.7	1.0

WELDWOOD LVL, 1 3/4" Wide, 2.0E, 1-3/4x9-1/4", 1-ply

Load combinations: ASCE 7-95;

SECTION vs. DESIGN CODE NDS-1997: (lbs, lbs-ft, or in)

Criterion	Analysis Value	Design Value	Analysis/Design
Shear	V @d = 2078	Vr = 3076	V/Vr = 0.68
Bending(+)	M = 2970	Mr = 6640	M/Mr = 0.45
Bending(-)	M = 4032	Mr = 6640	M/Mr = 0.61
Live Defl'n	0.17 = L/826	0.29 = L/480	0.58
Total Defl'n	0.26 = L/537	0.58 = L/240	0.45

ADDITIONAL DATA:

FACTORS:	F	CD	CM	Ct	CL	CF	CV	Cfu	Cr	LC#
Fb'+=	3100	1.00	1.00	1.00	1.000	1.03	1.000	1.00	1.00	12
Fb'--	3100	1.00	1.00	1.00	1.000	1.03	1.000	1.00	1.00	15
Fv'	285	1.00	1.00	1.00			(CH = 1.000)			15
Fcp'	900		1.00	1.00						-
E'	2.0 million	1.00	1.00							12

Bending(+): LC#12 = D+L (pattern: LL), M = 2970 lbs-ft
 Bending(-): LC#15 = D+L (pattern: LLL), M = 4032 lbs-ft
 Shear : LC#15 = D+L (pattern: LLL), V = 2396, V@d = 2078 lbs
 Deflection: LC#12 = D+L (pattern: LL) EI= 230.84e06 lb-in²
 Total Deflection = 1.50(Dead Load Deflection) + Live Load Deflection.
 (D=dead L=live S=snow W=wind I=impact C=construction CLd=concentrated)
 (All LC's are listed in the Analysis output)
 (Load Pattern: s=S/2, X=L+S or L+C, _=no pattern load in this span)


DESIGN NOTES:

- Please verify that the default deflection limits are appropriate for your application.
- BEAMS require restraint against lateral displacement and rotation at points of bearing
- SCL-BEAMS: Structural Composite Lumber design has assumed: - dry service conditions - full lateral support - no preservative or fire-retardant treatment
- no notches - single member use (no load sharing) - the specified dead load is no greater than 1/2 the specified live load
- BUILT-UP SCL-BEAMS: contact manufacturer's LVL user guide for connection details

REFER TO PAGE 10
BEAM # 4

Scale:	NONE		ADVANCED QUALITY CUSTOM HOMES JOCELYNE DERASPE
Dr. by:	S.B.		
App. by:			
Date:	09/13/2003	Plan: LM CALCUL	Page 14F C-00254

Job	Truss	Truss Type	Qty	Ply	03-2073 Habitec #C-00254	U1035711
03-2073	A1	MONO TRUSS	1	1	(optional)	
Structures St-Joseph Ltee, St-Joseph, Bce, Qc, Serge Vigneault 4.201 SR1 e Nov 16 2000 MITek Industries, Inc. Wed Sep 10 09:47:23 2003 Page 1						

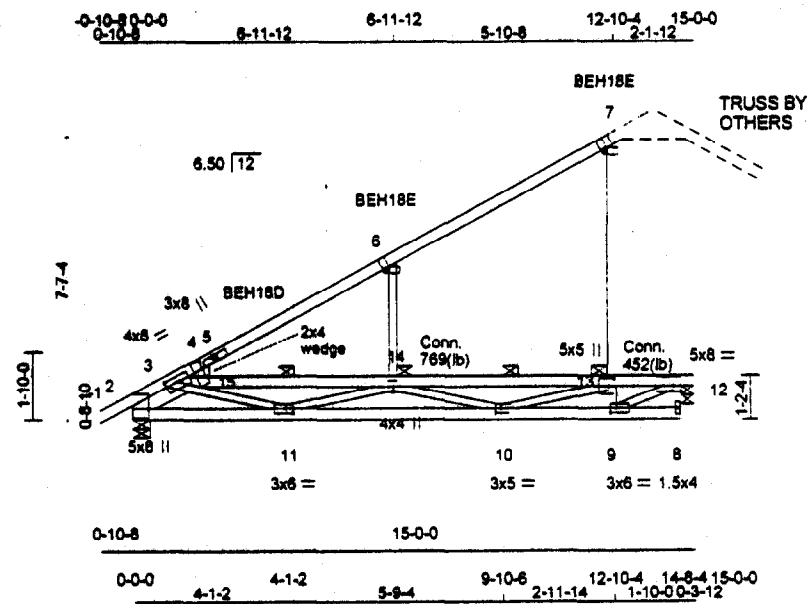

Scale = 1:58.1

Plate Offsets (X,Y):	[2:0-0-3,0-3-0], [3:0-4-0,0-1-12], [4:0-4-8,0-3-0], [5:0-0-11,0-0-10], [6:0-0-11,0-1-2], [7:0-0-11,0-1-2], [9:0-2-0,0-1-8], [10:0-1-12,0-1-8], [11:0-2-4,0-1-8], [12:0-2-8,0-2-0], [13:0-1-12,0-2-8]
----------------------	--


LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in (loc)	l/defl	PLATES	GRIP
TCLL 42.0	Plates Increase	1.15	TC 0.94	Vert(LL)	-0.28 10-11	>670	MII20	197/144
TCDL 7.0	Lumber Increase	1.15	BC 0.68	Vert(TL)	-0.36 10-11	>480	MII18	141/138
BCLL 0.0	Rep Stress Incr	NO	WB 0.67	Horz(TL)	-0.00 12	n/a		
BCDL 10.0	Code	BOCA/ANSI95	(Matrix)	1st LC LL Min l/defl	= 360		Weight: 75 lb	

LUMBER	BRACING
TOP CHORD 2 X 4 SPF No.2	TOP CHORD Sheathed or 5-5-7 oc purlins, except end verticals. [P]
BOT CHORD 2 X 4 SPF 2100F 1.8E	BOT CHORD Rigid ceiling directly applied or 5-2-15 oc bracing.
WEBS 2 X 3 SPF No.2 "Except"	WEBS 1 Row at midpt 3-14, 13-14
3-12 2 X 4 SPF 2100F 1.8E, 7-13 2 X 4 SPF No.2	1 Row at joint 13, 14
SLIDER Left 2 X 5 SPF 1650F 1.5E 1-8-8	

REACTIONS (lb/size) 12=854/0-3-12, 2=964/0-5-8
 Max Horz 2=468(load case 5)
 Max Uplift 12=368(load case 5), 2=285(load case 5)
 Max Grav 12=927(load case 2), 2=1128(load case 2)

FORCES (lb) - First Load Case Only
 TOP CHORD 1-2=7, 2-3=-1295, 3-4=-93, 4-5=-93, 5-6=141, 6-7=87, 8-12=30
 BOT CHORD 2-11=1025, 10-11=3884, 9-10=1616, 8-9=41
 WEBS 9-13=-812, 9-12=1774, 3-15=-2639, 14-15=-2638, 13-14=-2678, 12-13=-1616, 6-14=-632, 7-13=-452, 3-11=1689, 11-14=-1298, 10-14=-1048, 10-13=1317, 4-15=-114

- NOTES**
- This truss has been designed for the wind loads generated by 90 mph winds at 28 ft above ground level, using 5.0 psf top chord dead load and 5.0 psf bottom chord dead load, 0 mi from hurricane coastline, on an occupancy category I, condition I enclosed building, of dimensions 28 ft by 30 ft with exposure D ASCE 7-03 per BOCA/ANSI95. If end verticals exist, the left is exposed and the right is not exposed. If cantilevers exist, they are exposed to wind. If porches exist, they are not exposed to wind. The lumber DOL increase is 1.33, and the plate grip increase is 1.33
 - Design load is based on 42.0 psf specified roof snow load.
 - Unbalanced snow loads have been considered for this design.
 - All plates are MII20 plates unless otherwise indicated.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas with a clearance greater than 3-6-0 between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 368 lb uplift at joint 12 and 285 lb uplift at joint 2.
 - This truss has been designed with ANSI/TPI 1-1995 criteria.

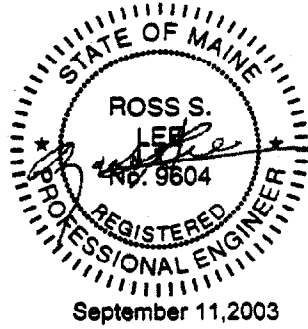

Continued on page 2

MITEK CANADA, INC. GENERAL SPECIFICATIONS (U.S.A.) DATED APRIL 1, 1997 FORM AN INTEGRAL PART OF THIS DESIGN.	MII	MITek Canada, Inc. 100 Industrial Rd., P.O. Box 1329 Bradford, Ontario, L3Z 2B7	LOADING AND DIMENSIONS SPECIFIED BY FABRICATOR. SUBJECT TO VERIFICATION BY AUTHORITIES IN JURISDICTION.
--	------------	---	---

Job	Truss	Truss Type	Qty	Ply	03-2073 Habitec #C-00254	U1035711
03-2073	A1	MONO TRUSS	1	1	(optional)	
Structures St-Joseph Ltee, St-Joseph, Bce, Qc, Serge Vigneault 4.201 SR1 e Nov 16 2000 MITek Industries, Inc. Wed Sep 10 09:47:23 2003 Page 2						

- NOTES**
- Load case(s) 1, 2, 3 has been modified. Building designer must review loads to verify that they are correct for the intended use of this truss.
 - Special hanger(s) or connection(s) required to support concentrated load(s). Design for unspecified connection(s) is delegated to the building designer.

- LOAD CASE(S)**
- Snow: Lumber Increase=1.15, Plate Increase=1.15
 Uniform Loads (plf)
 Vert: 1-7=-98.0, 2-9=-20.0
 Concentrated Loads (lb)
 Vert: 7=-212.0
 - Unbal.Snow-Left: Lumber Increase=1.15, Plate Increase=1.15
 Uniform Loads (plf)
 Vert: 1-7=-119.0, 2-9=-20.0
 Concentrated Loads (lb)
 Vert: 7=-161.0
 - Unbal.Snow-Right: Lumber Increase=1.00, Plate Increase=1.00
 Uniform Loads (plf)
 Vert: 1-7=-14.0, 2-9=-20.0
 Concentrated Loads (lb)
 Vert: 7=-149.0
 - Wind Left: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (plf)
 Vert: 1-2=65.6, 2-7=25.4, 2-9=-10.0
 Horz: 1-2=-75.8, 2-7=-35.4, 8-12=15.5
 - Wind Right: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (plf)
 Vert: 1-2=94.4, 2-7=54.2, 2-9=-10.0
 Horz: 1-2=-104.4, 2-7=-64.2, 8-12=15.5
 - 1st Wind Parallel: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (plf)
 Vert: 1-2=94.4, 2-7=54.2, 2-9=-10.0
 Horz: 1-2=-104.4, 2-7=-64.2, 8-12=15.5

Scale: NONE

Dr. by: S.B.

App. by:

Date: 09/13/2003

Plot: TRUSS DETAILS

Page: 15B

HABITEC 2000

ADVANCED QUALITY CUSTOM HOMES

JOCELINE DERISPE

C-00254

Job	Truss	Truss Type	Qty	Ply	03-2073 Habitec #C-00254	U1035713
03-2073	D1	ROOF TRUSS	1	1	(optional)	

Structures St-Joseph Ltee, St-Joseph, Bce, Qc, Serge Vigneault 4.201 SR1 s Nov 16 2000 MiTek Industries, Inc. Wed Sep 10 10:30:06 2003 Page 1

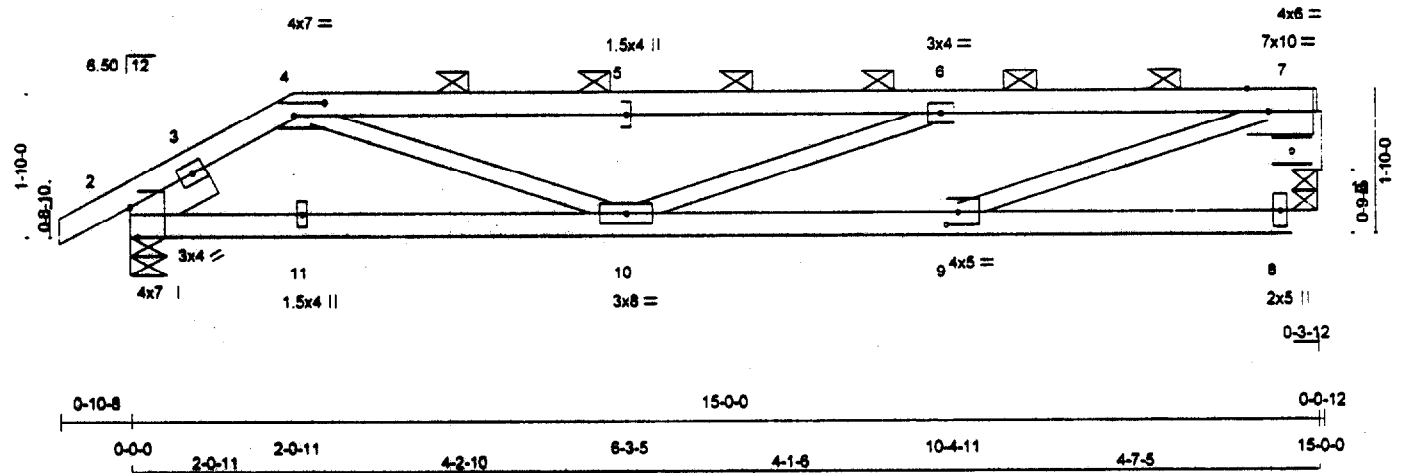



Plate Offsets (X,Y): [2:0-1-3 Edge], [4:0-4-12,0-2-0], [7:0-3-4 Edge], [9:0-1-12,0-2-0]									
LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in (loc)	I/def	PLATES	GRIP	
TCLL 52.5	Plates Increase	1.15	TC 0.52	Vert(LL)	-0.14	9-10	>999	MII20	187/144
TCDL 7.0	Lumber Increase	1.15	BC 0.62	Vert(TL)	-0.19	9-10	>908		
BCLL 0.0	Rep Stress Incr	YES	WB 0.68	Horz(TL)	0.01	12	n/a		
BCDL 10.0	Code	BOCA/ANSI95	(Matrix)	1st LC LL Min I/def	= 360			Weight: 53 lb	

LUMBER	BRACING
TOP CHORD 2 X 4 SPF No.2	TOP CHORD Sheathed or 4-1-8 oc purlins, except end verticals, and 2-0-0 oc purlins (3-5-13 max.); 4-7.
BOT CHORD 2 X 4 SPF No.2	BOT CHORD Rigid ceiling directly applied or 7-5-0 oc bracing.
WEBS 2 X 3 SPF No.2 "Except"	
7-8 2 X 4 SPF No.2	
OTHERS 2 X 4 SPF 2100F 1.8E	
SLIDER Left 2 X 5 SPF 1650F 1.5E 1-1-6	

REACTIONS (lb/size) 2=1118/0-3-8, 12=1027/0-3-12
 Max Horz 2=62(load case 3)
 Max Uplift 2=-463(load case 3), 12=-327(load case 3)

FORCES (lb) - First Load Case Only
 TOP CHORD 1-2=8, 2-3=-1514, 3-4=-1455, 4-5=-2418, 5-6=-2417, 6-7=-1996, 8-12=67, 7-12=-926
 BOT CHORD 2-11=1199, 10-11=1200, 9-10=1996, 8-9=129
 WEBS 4-11=16, 4-10=1295, 5-10=-516, 6-10=450, 6-9=-817, 7-9=1984

- NOTES**
- This truss has been designed for the wind loads generated by 90 mph winds at 28 ft above ground level, using 5.0 psf top chord dead load and 5.0 psf bottom chord dead load, 0 mi from hurricane coastline, on an occupancy category I, condition I enclosed building, of dimensions 28 ft by 30 ft with exposure D ASCE 7-93 per BOCA/ANSI95. If end verticals exist, the left is exposed and the right is not exposed. If cantilevers exist, they are exposed to wind. If porches exist, they are not exposed to wind. The lumber DOL increase is 1.33, and the plate grip increase is 1.33.
 - Design load is based on 52.5 psf specified roof snow load.
 - Provide adequate drainage to prevent water ponding.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas with a clearance greater than 3-6-0 between the bottom chord and any other members.
 - Bearing at joint(s) 12 considers parallel to grain value using ANSI/TPI 1-1995 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 403 lb uplift at joint 2 and 327 lb uplift at joint 12.
 - This truss has been designed with ANSI/TPI 1-1995 criteria.
 - Design assumes 4x2 (flat orientation) purlins at oc spacing indicated, fastened to truss TC w/ 2-10d nails.

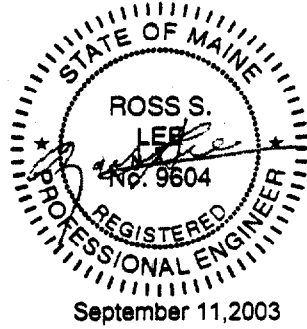

Continued on page 2

MITEK CANADA, INC. GENERAL SPECIFICATIONS (U.S.A.) DATED APRIL 1, 1997 FORM AN INTEGRAL PART OF THIS DESIGN.		MITek Canada, Inc. 100 Industrial Rd., P.O. Box 1329 Bradford, Ontario, L3Z 2B7		LOADING AND DIMENSIONS SPECIFIED BY FABRICATOR, SUBJECT TO VERIFICATION BY AUTHORITIES IN JURISDICTION.
---	--	--	--	---

Job	Truss	Truss Type	Qty	Ply	03-2073 Habitec #C-00254	U1035713
03-2073	D1	ROOF TRUSS	1	1	(optional)	

Structures St-Joseph Ltee, St-Joseph, Bce, Qc, Serge Vigneault 4.201 SR1 s Nov 16 2000 MiTek Industries, Inc. Wed Sep 10 10:30:06 2003 Page 2

- LOAD CASE(S)**
- Snow: Lumber Increase=1.15, Plate Increase=1.15
 Uniform Loads (plf)
 Vert: 1-4=-119.0, 4-7=-119.0, 7-12=-14.0, 2-8=-20.0
 - Wind Left: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (plf)
 Vert: 1-2=65.6, 2-4=25.4, 4-7=54.2, 7-12=-25.5, 2-8=-10.0
 Horz: 1-2=-75.6, 2-4=-35.4, 7-8=15.5
 Drag: 4-5=-0.2
 - Wind Right: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (plf)
 Vert: 1-2=94.4, 2-4=54.2, 4-7=54.2, 7-12=-25.5, 2-8=-10.0
 Horz: 1-2=-104.4, 2-4=-64.2, 7-8=15.5
 Drag: 4-5=-0.2
 - 1st Wind Parallel: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (plf)
 Vert: 1-2=94.4, 2-4=54.2, 4-7=54.2, 7-12=-25.5, 2-8=-10.0
 Horz: 1-2=-104.4, 2-4=-64.2, 7-8=15.5
 Drag: 4-5=-0.2

Scale: NONE

Dr. By: S.B.

App. By:

Date: 09/13/2003

Plan: TRUSS DETAILS

Page: 15D

HABITEC 2000

ADVANCED QUALITY CUSTOM HOMES

JOCYLINE DERASPE

C-00254

Job	Truss	Truss Type	Qty	Ply	03-2073 Habitec #C-00254	U1035715
03-2073	E1	ROOF TRUSS	2	1	(optional)	

Structures St-Joseph Ltee, St-Joseph, Bce, Qc, Serge Vigneault 4.201 SR1 s Nov 16 2000 MiTek Industries, Inc. Wed Sep 10 10:55:28 2003 Page 1

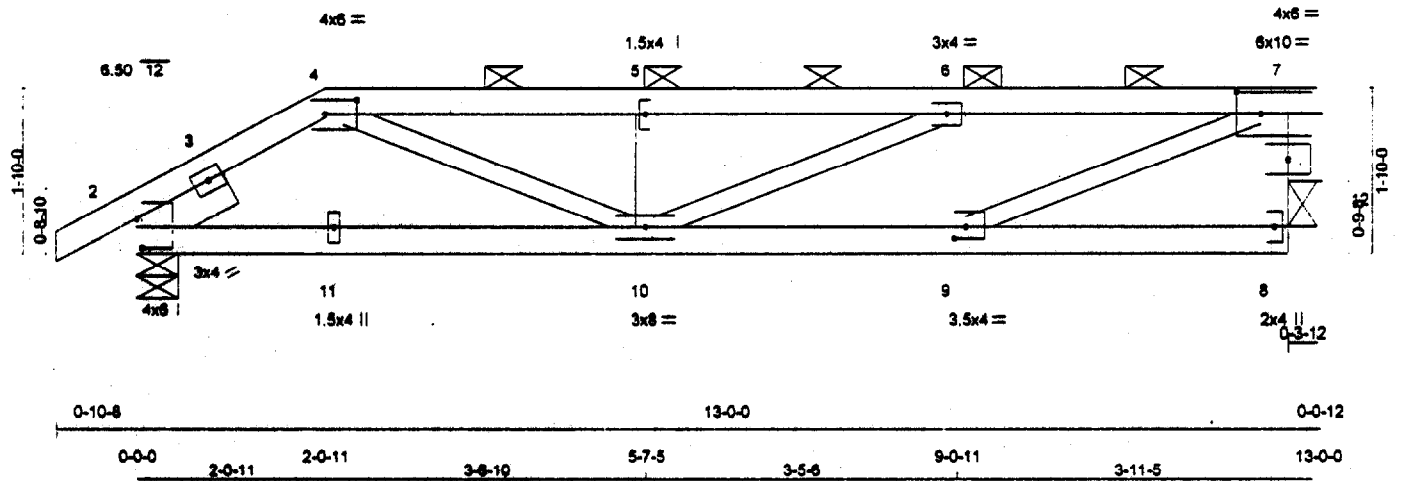



Plate Offsets (X,Y): [2:0-0-11,0-3-14], [4:0-4-4,0-2-0], [7:0-3-4,0-3-0], [9:0-1-8,0-1-8]


LOADING (psf)	SPACING	2-0-0	CSI	DEFL	in (loc)	l/def	PLATES	GRIP	
TCLL 52.5	Plates Increase	1.15	TC 0.39	Vert(LL)	-0.08	9-10	>999	MII20	197/144
TCDL 7.0	Lumber Increase	1.15	BC 0.45	Vert(TL)	-0.11	9-10	>999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.51	Horz(TL)	0.01	12	n/a		
BCDL 10.0	Code	BOCA/ANSI95	(Matrix)	1st LC LL Min l/def	=	360		Weight: 47 lb	

LUMBER	BRACING
TOP CHORD 2 X 4 SPF No.2	TOP CHORD Sheathed or 4-9-11 oc purlins, except end verticals, and 2-0-0 oc purlins (4-2-2 max.): 4-7.
BOT CHORD 2 X 4 SPF No.2	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 8-8-11 oc bracing: 9-10.
WEBS 2 X 3 SPF No.2 *Except* 7-8 2 X 4 SPF No.2	
OTHERS 2 X 4 SPF 2100F 1.8E	
SLIDER Left 2 X 5 SPF 1850F 1.5E 1-1-8	

REACTIONS (lb/size) 2=979/0-5-8, 12=888/0-3-12
 Max Horz 2=82(load case 3)
 Max UpR2=358(load case 3), 12=283(load case 5)

FORCES (lb) - First Load Case Only
 TOP CHORD 1-2=8, 2-3=1268, 3-4=1202, 4-5=1804, 5-6=1804, 6-7=1453, 8-12=57, 7-12=806
 BOT CHORD 2-11=982, 10-11=983, 9-10=1453, 8-9=83
 WEBS 4-11=15, 4-10=893, 5-10=438, 6-10=384, 6-9=539, 7-9=1489

- NOTES
- This truss has been designed for the wind loads generated by 90 mph winds at 28 ft above ground level, using 5.0 psf top chord dead load and 5.0 psf bottom chord dead load, 0 mi from hurricane oceanline, on an occupancy category I, condition I enclosed building, of dimensions 28 ft by 30 ft with exposure D ASCE 7-93 per BOCA/ANSI95. If end verticals exist, the left is exposed and the right is not exposed. If cantilevers exist, they are exposed to wind. If porches exist, they are not exposed to wind. The lumber DOL increase is 1.33, and the plate grip increase is 1.33.
 - Design load is based on 52.5 psf specified roof snow load.
 - Provide adequate drainage to prevent water ponding.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas with a clearance greater than 3-6-0 between the bottom chord and any other members.
 - Bearing at joint(s) 12 considers parallel to grain value using ANSI/TPI 1-1995 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 358 lb uplift at joint 2 and 283 lb uplift at joint 12.
 - This truss has been designed with ANSI/TPI 1-1995 criteria.
 - Design assumes 4x2 (flat orientation) purlins at oc spacing indicated, fastened to truss TC w/ 2-10d nails.

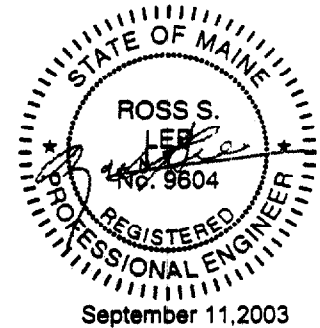

Continued on page 2

MITTEK CANADA, INC. GENERAL SPECIFICATIONS (U.S.A.) DATED APRIL 1, 1997 FORM AN INTEGRAL PART OF THIS DESIGN.		MITTEK Canada, Inc. 100 Industrial Rd., P.O. Box 1329 Bradford, Ontario, L3Z 2B7	LOADING AND DIMENSIONS SPECIFIED BY FABRICATOR. SUBJECT TO VERIFICATION BY AUTHORITIES IN JURISDICTION.
--	--	---	---

Job	Truss	Truss Type	Qty	Ply	03-2073 Habitec #C-00254	U1035715
03-2073	E1	ROOF TRUSS	2	1	(optional)	

Structures St-Joseph Ltee, St-Joseph, Bce, Qc, Serge Vigneault 4.201 SR1 s Nov 16 2000 MiTek Industries, Inc. Wed Sep 10 10:55:28 2003 Page 2

- LOAD CASE(S)
- Snow: Lumber Increase=1.15, Plate Increase=1.15
 Uniform Loads (plf)
 Vert: 1-4=-119.0, 4-7=-119.0, 7-12=-14.0, 2-8=-20.0
 - Wind Left: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (plf)
 Vert: 1-2=65.6, 2-4=25.4, 4-7=54.2, 7-12=-25.5, 2-8=-10.0
 Horz: 1-2=-75.6, 2-4=-35.4, 7-8=15.5
 Drag: 4-5=-0.2
 - Wind Right: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (plf)
 Vert: 1-2=94.4, 2-4=54.2, 4-7=54.2, 7-12=-25.5, 2-8=-10.0
 Horz: 1-2=-104.4, 2-4=-64.2, 7-8=15.5
 Drag: 4-5=-0.2
 - 1st Wind Parallel: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (plf)
 Vert: 1-2=94.4, 2-4=54.2, 4-7=54.2, 7-12=-25.5, 2-8=-10.0
 Horz: 1-2=-104.4, 2-4=-64.2, 7-8=15.5
 Drag: 4-5=-0.2

Scale: NONE

HABITEC 2000

Dr. by: S.B.

App. by:

Date: 09/13/2003

File: TRUSS DETAILS

Page: 15F


Page: C-00254

ADVANCED QUALITY CUSTOM HOMES

JOCELYNE DERASPE

Job	Truss	Truss Type	Qty	Ply	03-2073 Habitec #C-00254	U1035717
03-2073	L1	ROOF TRUSS	2	1	(optional)	

Structures St-Joseph Ltee, St-Joseph, Bce, Qc, Serge Vigneault 4.201 SR1 s Nov 16 2000 MiTek Industries, Inc. Wed Sep 10 11:08:33 2003 Page 1



Scale: 1/2"=1'

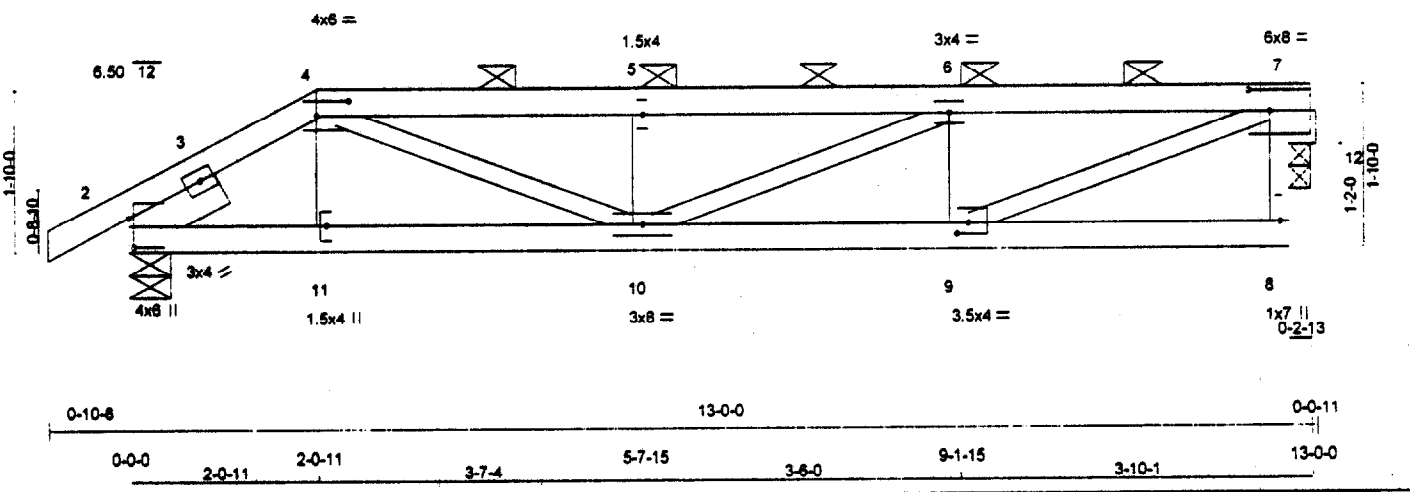


Plate Offsets (X,Y): [2:0-0-11,0-3-14], [4:0-4-4,0-2-0], [7:0-2-12,0-2-12], [9:0-1-8,0-1-8]


LOADING (psf)	SPACING	2-0-0	CSI	DEFL	In	(loc)	I/defl	PLATES	GRIP
TCLL 52.5	Plates increase	1.15	TC 0.40	Vert(LL)	-0.08	9-10	>999	MII20	197/144
TCDL 7.0	Lumber increase	1.15	BC 0.46	Vert(TL)	-0.11	9-10	>999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.52	Horz(TL)	0.00	12	n/a		
BCDL 10.0	Code	BOCA/ANSI95	(Matrix)	1st LC LL Min I/defl	= 360			Weight: 46 lb	

LUMBER	BRACING
TOP CHORD 2 X 4 SPF No.2	TOP CHORD Sheathed or 4-9-2 oc purlins, except end verticals, and 2-0-0 oc purlins (4-1-9 max.): 4-7.
BOT CHORD 2 X 4 SPF No.2	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 8-7-10 oc bracing: 9-10.
WEBS 2 X 3 SPF No.2	
OTHERS 2 X 3 SPF 1850F 1.5E	
SLIDER Left 2 X 5 SPF 1850F 1.5E 1-1-6	

REACTIONS (lb/size) 2=988/0-5-8, 12=890/0-2-13
 Max Horz 2=82(load case 3)
 Max Uplift 2=361(load case 3), 12=285(load case 3)

FORCES (lb) - First Load Case Only
 TOP CHORD 1-2=8, 2-3=-1283, 3-4=-1218, 4-5=-1839, 5-6=-1839, 6-7=-1482, 8-12=54, 7-12=-803
 BOT CHORD 2-11=996, 10-11=997, 9-10=1482, 8-9=86
 WEBS 4-11=16, 4-10=915, 5-10=-444, 6-10=390, 6-9=-548, 7-9=1518

- NOTES
- This truss has been designed for the wind loads generated by 90 mph winds at 28 ft above ground level, using 5.0 psf top chord dead load and 5.0 psf bottom chord dead load, 0 mi from hurricane oceanline, on an occupancy category I, condition I enclosed building, of dimensions 28 ft by 30 ft with exposure D ASCE 7-93 per BOCA/ANSI95. If end verticals exist, the left is exposed and the right is not exposed. If cantilevers exist, they are exposed to wind. If porches exist, they are not exposed to wind. The lumber DOL increase is 1.33, and the plate grip increase is 1.33.
 - Design load is based on 52.5 psf specified roof snow load.
 - Provide adequate drainage to prevent water ponding.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas with a clearance greater than 3-6-0 between the bottom chord and any other members.
 - Bearing at joint(s) 12 considers parallel to grain value using ANSI/TPI 1-1995 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate at joint(s) 12.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 361 lb uplift at joint 2 and 285 lb uplift at joint 12.
 - This truss has been designed with ANSI/TPI 1-1995 criteria.
 - Design assumes 4x2 (flat orientation) purlins at oc spacing indicated, fastened to truss TC w/ 2-10d nails.

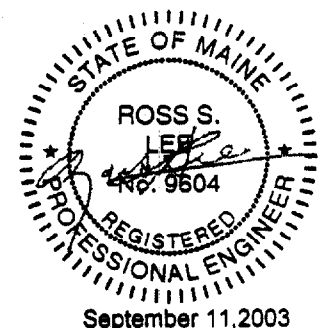

Continued on page 2

MITEK CANADA, INC. GENERAL SPECIFICATIONS JUL 21 DATED APRIL 1, 1997 FORM AN INTEGRAL PART OF THIS DESIGN.		MiTek Canada, Inc. 100 Industrial Rd., P.O. Box 1329 Bradford, Ontario, L3Z 2B7	LOADING AND DIMENSIONS SPECIFIED BY FABRICATOR. SUBJECT TO VERIFICATION BY AUTHORITIES IN JURISDICTION.
---	--	--	---

Job	Truss	Truss Type	Qty	Ply	03-2073 Habitec #C-00254	U1035717
03-2073	L1	ROOF TRUSS	2	1	(optional)	

Structures St-Joseph Ltee, St-Joseph, Bce, Qc, Serge Vigneault 4.201 SR1 s Nov 16 2000 MiTek Industries, Inc. Wed Sep 10 11:08:34 2003 Page 2

- LOAD CASE(S)
- Snow: Lumber Increase=1.15, Plate Increase=1.15
 Uniform Loads (plf)
 Vert: 1-4=-119.0, 4-7=-119.0, 7-12=-14.0, 2-8=-20.0
 - Wind Left: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (plf)
 Vert: 1-2=65.6, 2-4=25.4, 4-7=54.2, 7-12=-25.5, 2-8=-10.0
 Horz: 1-2=-75.6, 2-4=-35.4, 7-8=15.5
 Drag: 4-5=-0.2
 - Wind Right: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (plf)
 Vert: 1-2=94.4, 2-4=54.2, 4-7=54.2, 7-12=-25.5, 2-8=-10.0
 Horz: 1-2=-104.4, 2-4=-64.2, 7-8=15.5
 Drag: 4-5=-0.2
 - 1st Wind Parallel: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (plf)
 Vert: 1-2=94.4, 2-4=54.2, 4-7=54.2, 7-12=-25.5, 2-8=-10.0
 Horz: 1-2=-104.4, 2-4=-64.2, 7-8=15.5
 Drag: 4-5=-0.2

Scale: NONE

HABITEC 2000

Dr. by: S.B.

App. by:

Date: 09/13/2003

Plot: TRUSS DETAILS

Page: 15H

ADVANCED QUALITY CUSTOM HOMES

JOCELYNE DERASPE

C-00254

Job 03-2073	Truss F3	Truss Type ROOF TRUSS	Qty 1	Ply 1	03-2073 Habitec #C-00254 (optional)	10
Structures St-Joseph Ltée, St-Joseph, Claude Gagnon			4.201 SR1 s Nov 16 2000 Mitek Industries, Inc. Tue Sep 09 10:22:02 2003 Page 1			

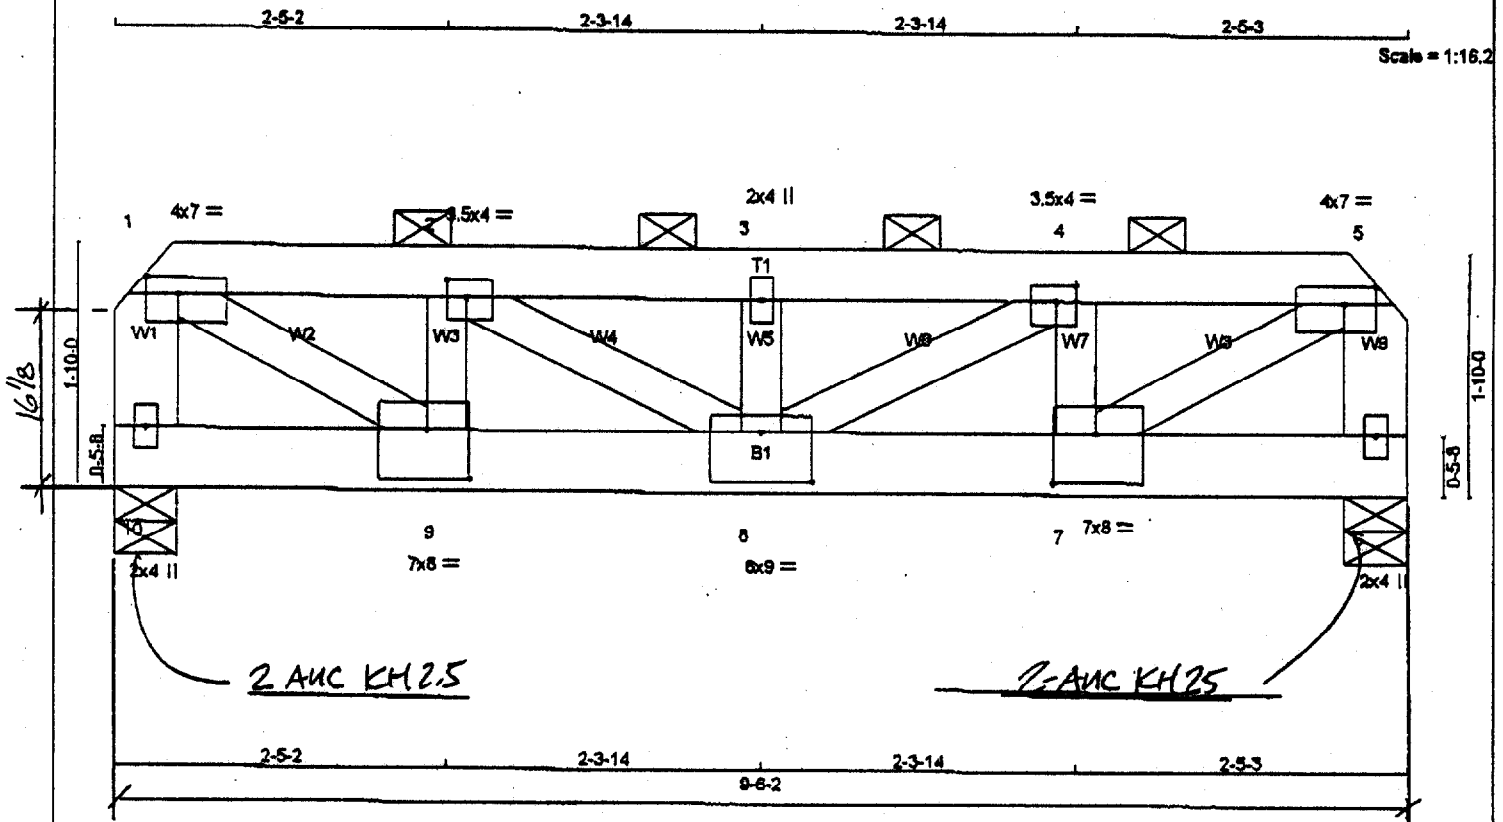


Plate Offsets (X, Y): [1:0-3-12.0-1-8], [2:0-1-12.0-1-8], [4:0-1-12.0-1-8], [5:0-2-12.0-1-8], [7:0-3-12.0-4-8], [8:0-4-8.0-4-8], [9:0-3-12.0-4-8]

LOADING (psf)	SPACING	CSI	DEFL	PLATES	GRIP
TCLL 52.5	2-0-0	TC 0.23	in (loc) Vdef	M1120	197/144
TCDL 7.0	Plates Increase 1.15	BC 0.58	Vert(LL) -0.08 8 >999		
BCLL 0.0	Lumber Increase 1.15	WB 0.90	Vert(TL) -0.11 8 >999		
BCDL 10.0	Rep Stress Incr NO		Horz(TL) 0.01 6 n/a		
	Code BOCA/ANSI95		1st LC LL Min Vdef = 360		
				Weight: 48 lb	

LUMBER
 TOP CHORD 2 X 5 SPF 1650F 1.5E
 BOT CHORD 2 X 6 SPF 1650F 1.5E
 WEBS 2 X 4 SPF No.2 *Except
 W1 2 X 6 SPF No.2, W9 2 X 6 SPF No.2

BRACING
 TOP CHORD 2-0-0 oc purlins (3-10-11 max.); 1-5, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 8-5-2 oc bracing.

REACTIONS (lb/size) 10=2616/0-5-8, 6=2616/0-5-8
 Max Horz 10=79 (load case 2)
 Max Uplift 10=923 (load case 2), 6=938 (load case 2)

FORCES (lb) - First Load Case Only
 TOP CHORD 1-10=2111, 1-2=3078, 2-3=4178, 3-4=4179, 4-5=3078, 5-6=2111
 BOT CHORD 8-10=0, 8-9=3078, 7-8=3078, 6-7=0
 WEBS 1-9=3658, 2-9=941, 2-8=1292, 3-8=277, 4-8=1292, 4-7=941, 5-7=3658

- NOTES**
- This truss has been designed for the wind loads generated by 90 mph winds at 28 ft above ground level, using 5.0 psf top chord dead load and 5.0 psf bottom chord dead load, 0 mi from hurricane oceanline, on an occupancy category I, condition I enclosed building, of dimensions 28 ft by 30 ft with exposure D ASCE 7-93 per BOCA/ANSISS. If end verticals exist, the left is exposed and the right is not exposed. If cantilevers exist, they are exposed to wind. If porches exist, they are not exposed to wind. The lumber DOL increase is 1.33, and the plate grip increase is 1.33.
 - Design load is based on 52.5 psf specified roof snow load.
 - Provide adequate drainage to prevent water ponding.
 - * This truss has been designed for a live load of 20.0 psf on the bottom chord in all areas with a clearance greater than 3-6-0 between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 926 lb uplift at joint 10 and 938 lb uplift at joint 6.
 - This truss has been designed with ANSI/TPI 1-1985 criteria.
 - Load case(s) 1, 2, 3, 4 has been modified. Building designer must review loads to verify that they are correct for the intended use of this truss.
 - Design assumes 4x2 (flat orientation) purlins at oc spacing indicated, fastened to truss TC w/ 2-10d nails.

- LOAD CASE(S)**
- Snow: Lumber Increase=1.15, Plate Increase=1.15
 Uniform Loads (psf)
 Vert: 1-5=118.0, 6-10=459.0
 - Wind Left: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (psf)
 Vert: 1-5=54.2, 6-10=181.6
 Horz: 1-10=71.2, 5-6=15.5
 - Wind Right: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (psf)
 Vert: 1-5=54.2, 6-10=151.8
 Horz: 1-10=71.2, 5-6=15.5
 - 1st Wind Parallel: Lumber Increase=1.33, Plate Increase=1.33
 Uniform Loads (psf)
 Vert: 1-5=54.2, 6-10=151.6
 Horz: 1-10=71.2, 5-6=15.5

HABITEC 2000

ADVANCED QUALITY CUSTOM HOMES

JOCELYNE DERAPPE

C-00254

Page 15J


Date: 09/13/2003

Part: TRUSS DETAILS

Scale: NONE

Dr. by: S.B.

App. by:

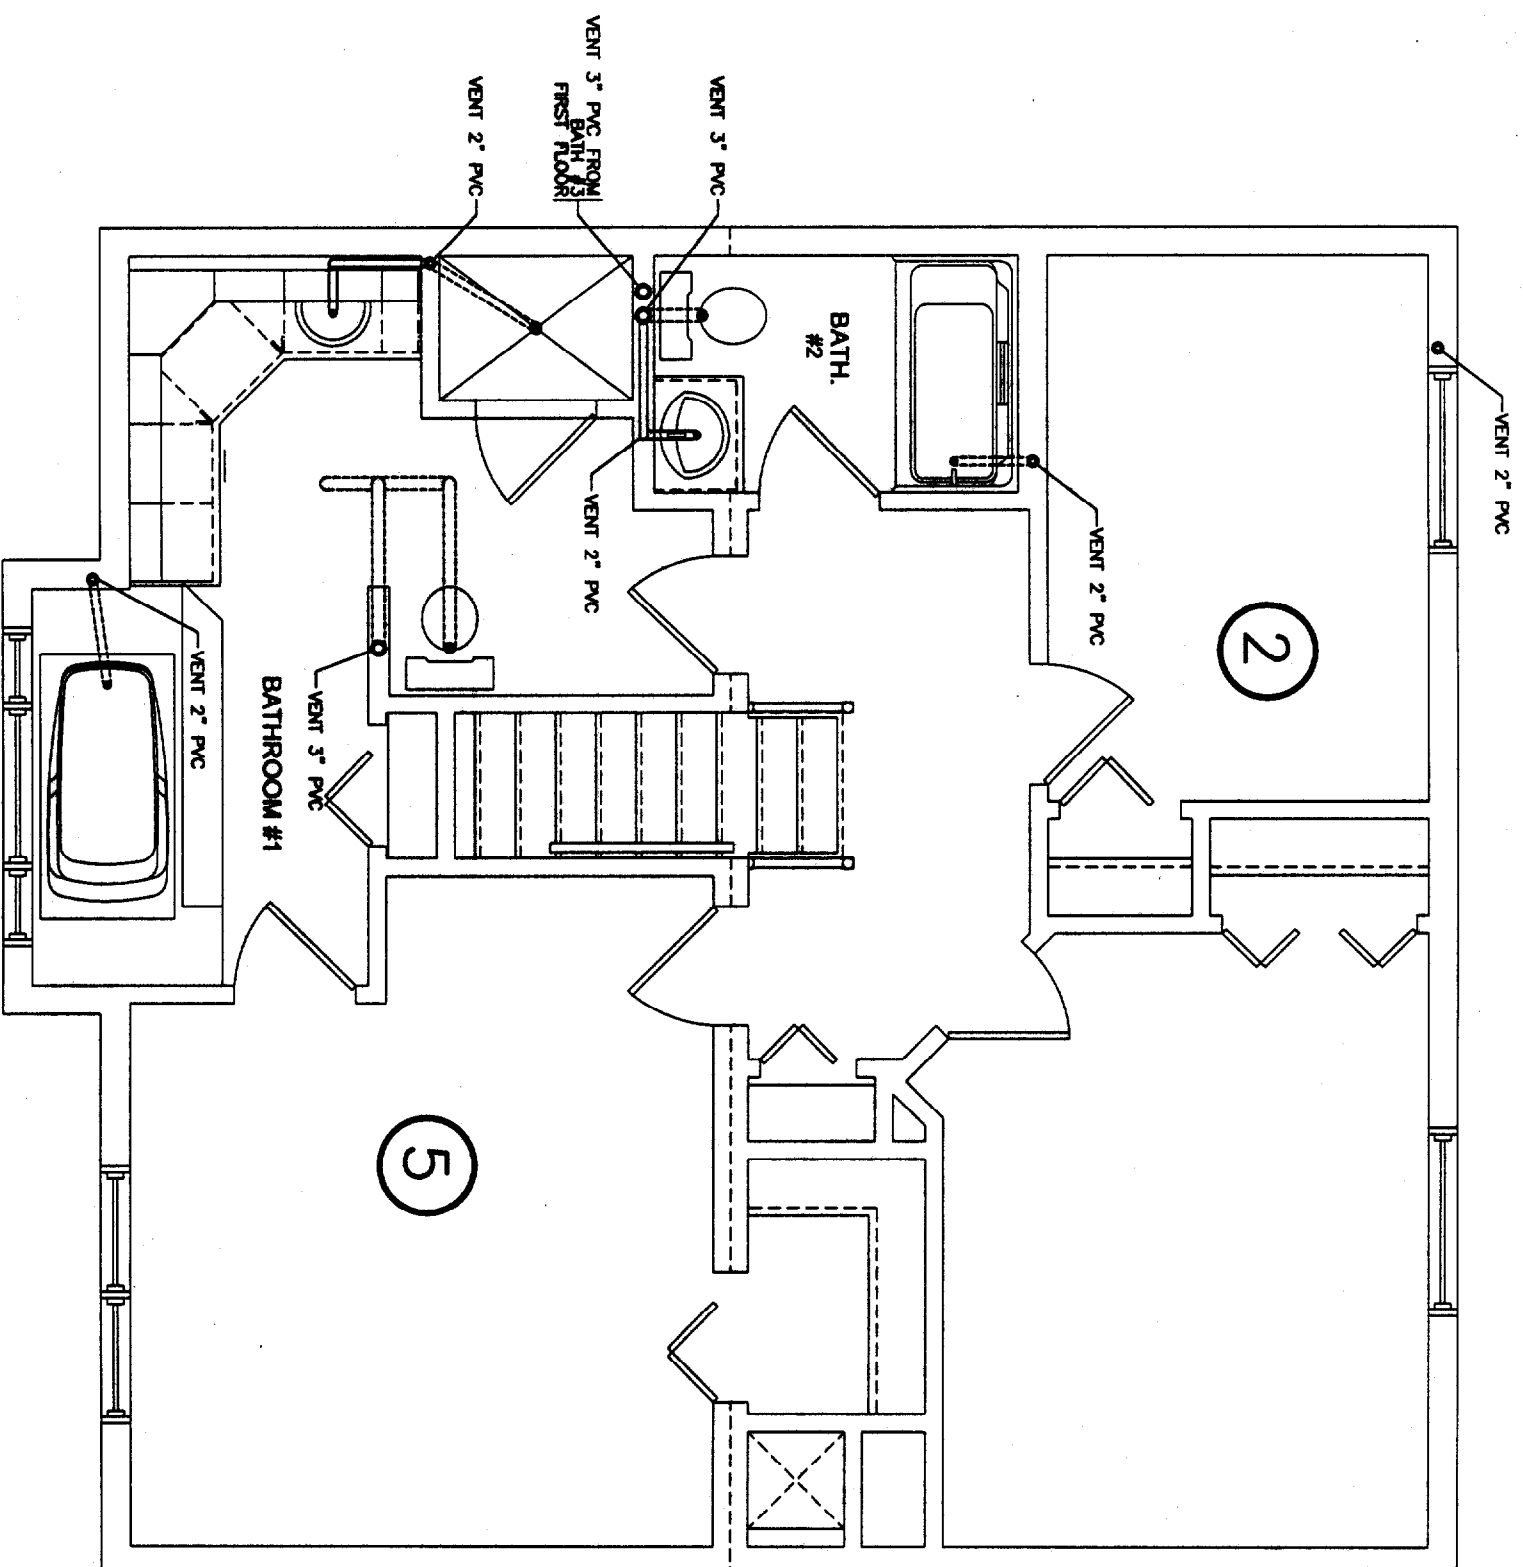

HABITEC 2000®

ADVANCED QUALITY CUSTOM HOMES

JOCELYNE DERVASPE

C- 00254

Scale:
1/4" = 1'-0"


Designé par:
S.B.

App. par:

Date:
09/13/2003

Plan: PLUMBING
SECOND FL.

Page 16B

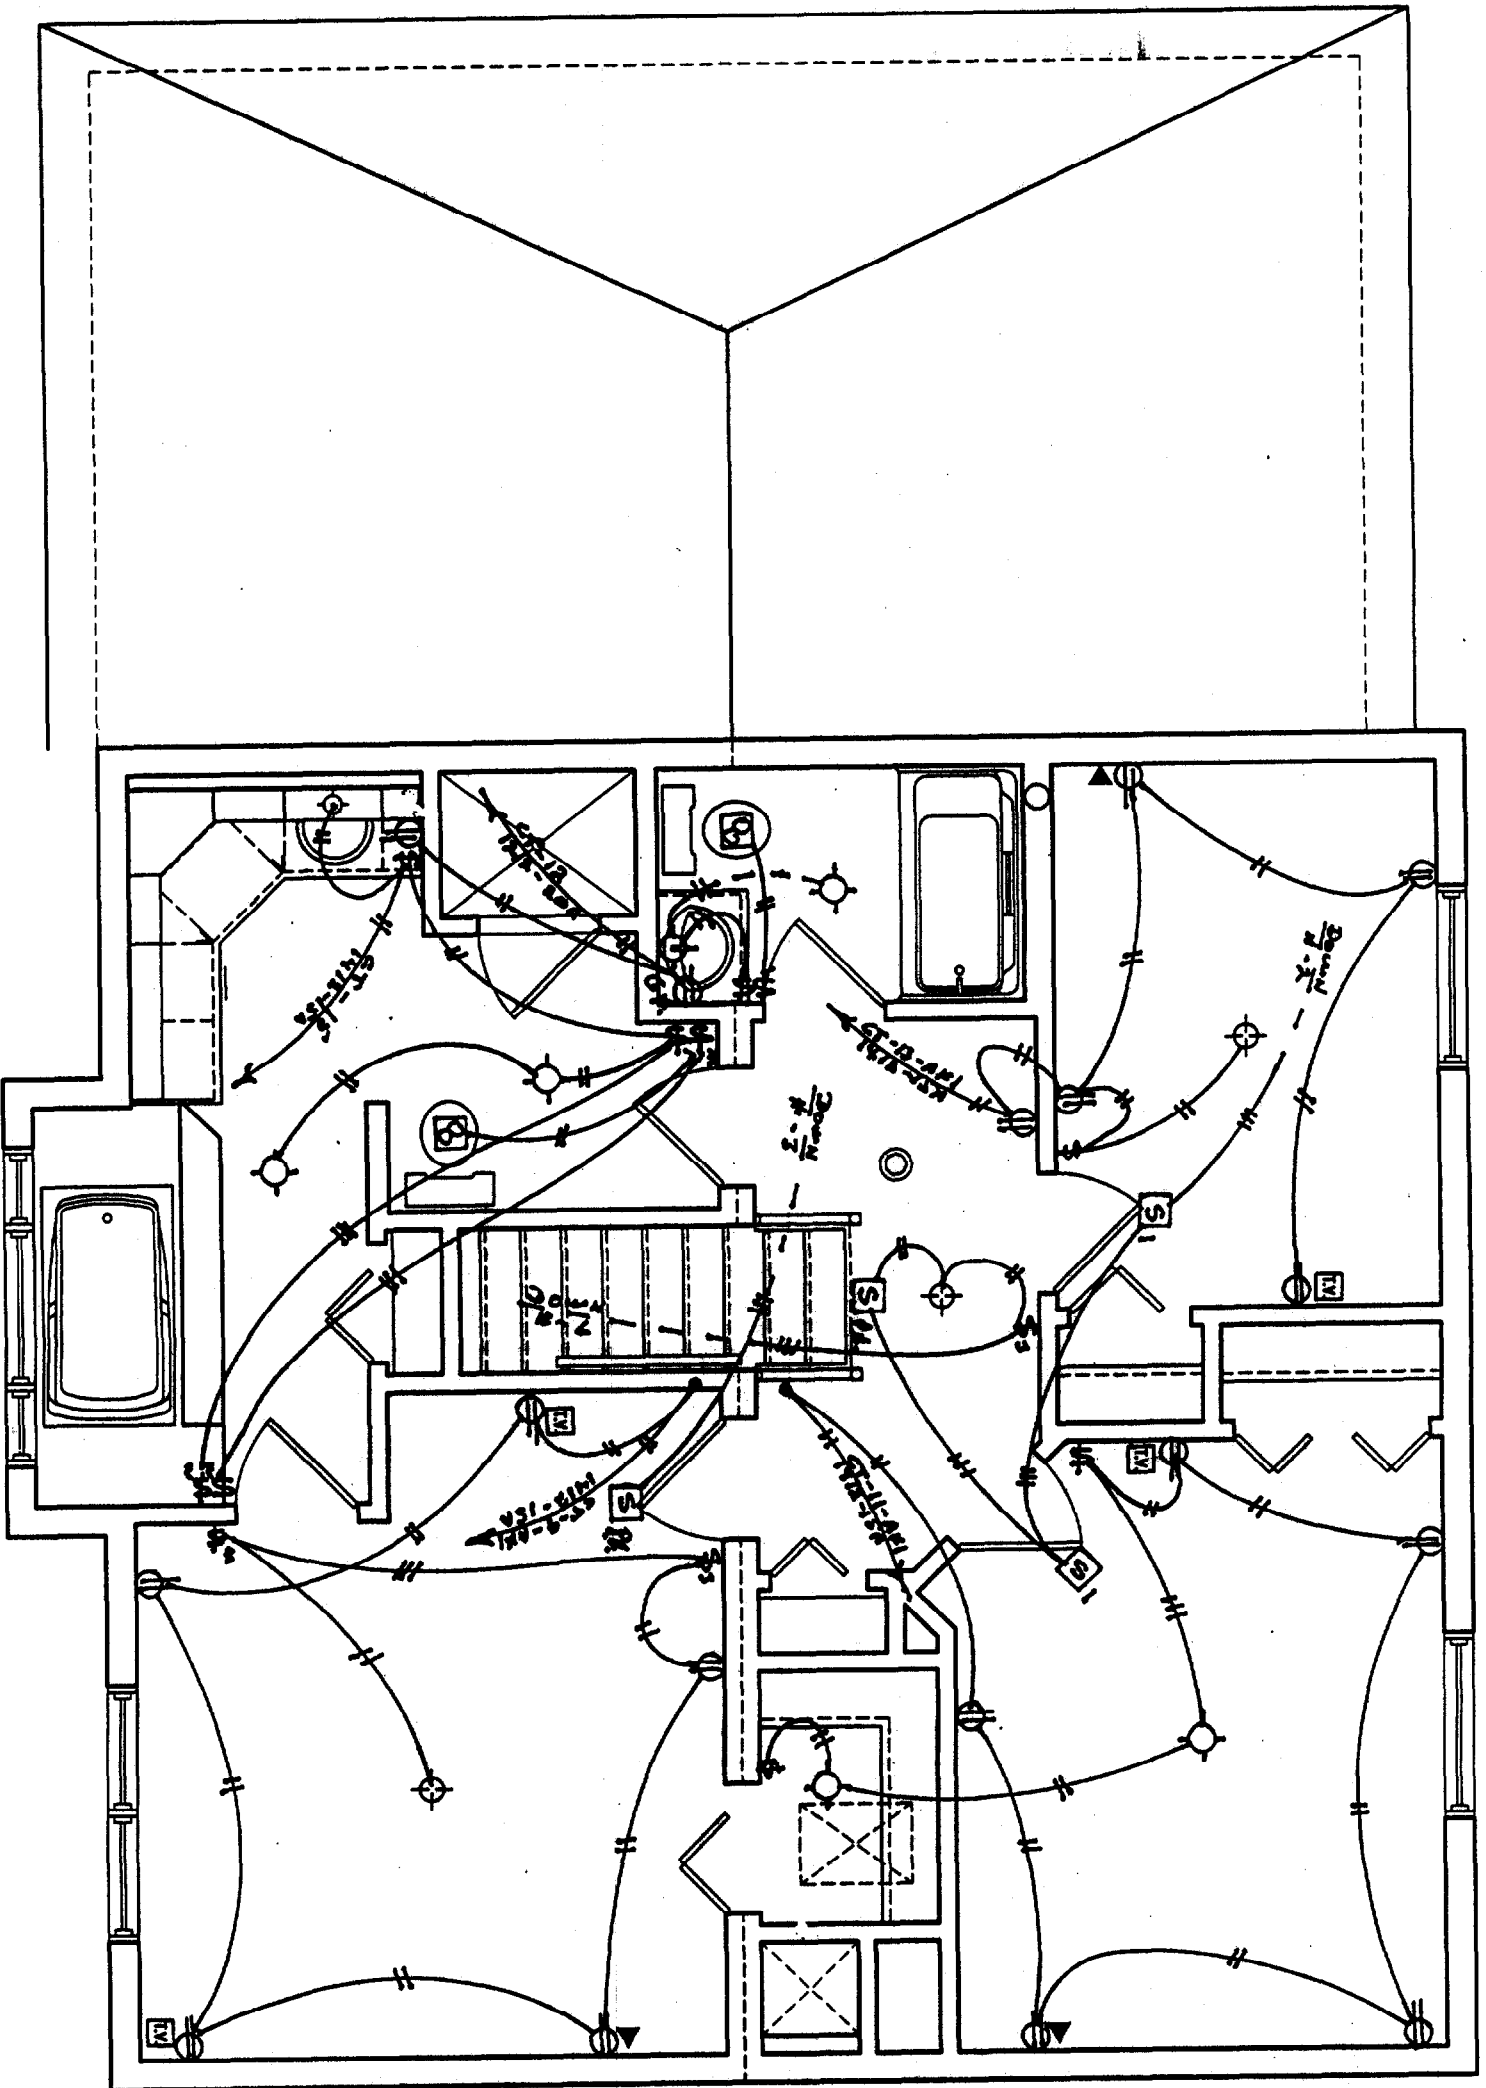

HABITEC 2000

ADVANCED QUALITY CUSTOM HOMES

JOCELYNE DERBYSE

C- 00254

Echelle:
1/4"=1'-0"



Dessiné par:
R.M.

App. par:
[Signature]

Date:
08/28/2003

Plan:
ELEC,
SECOND FL.

Page
18C

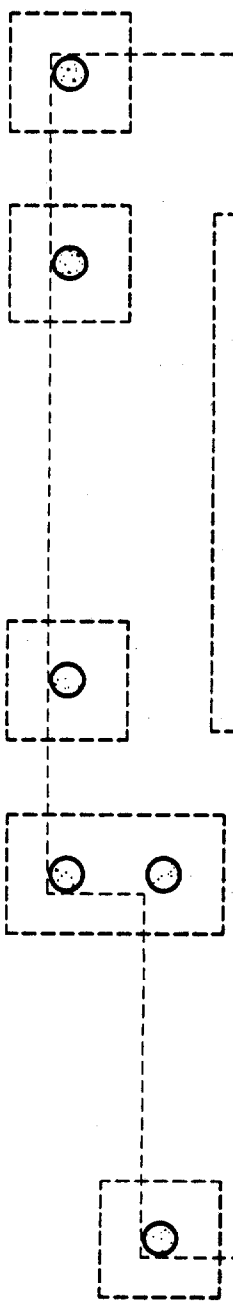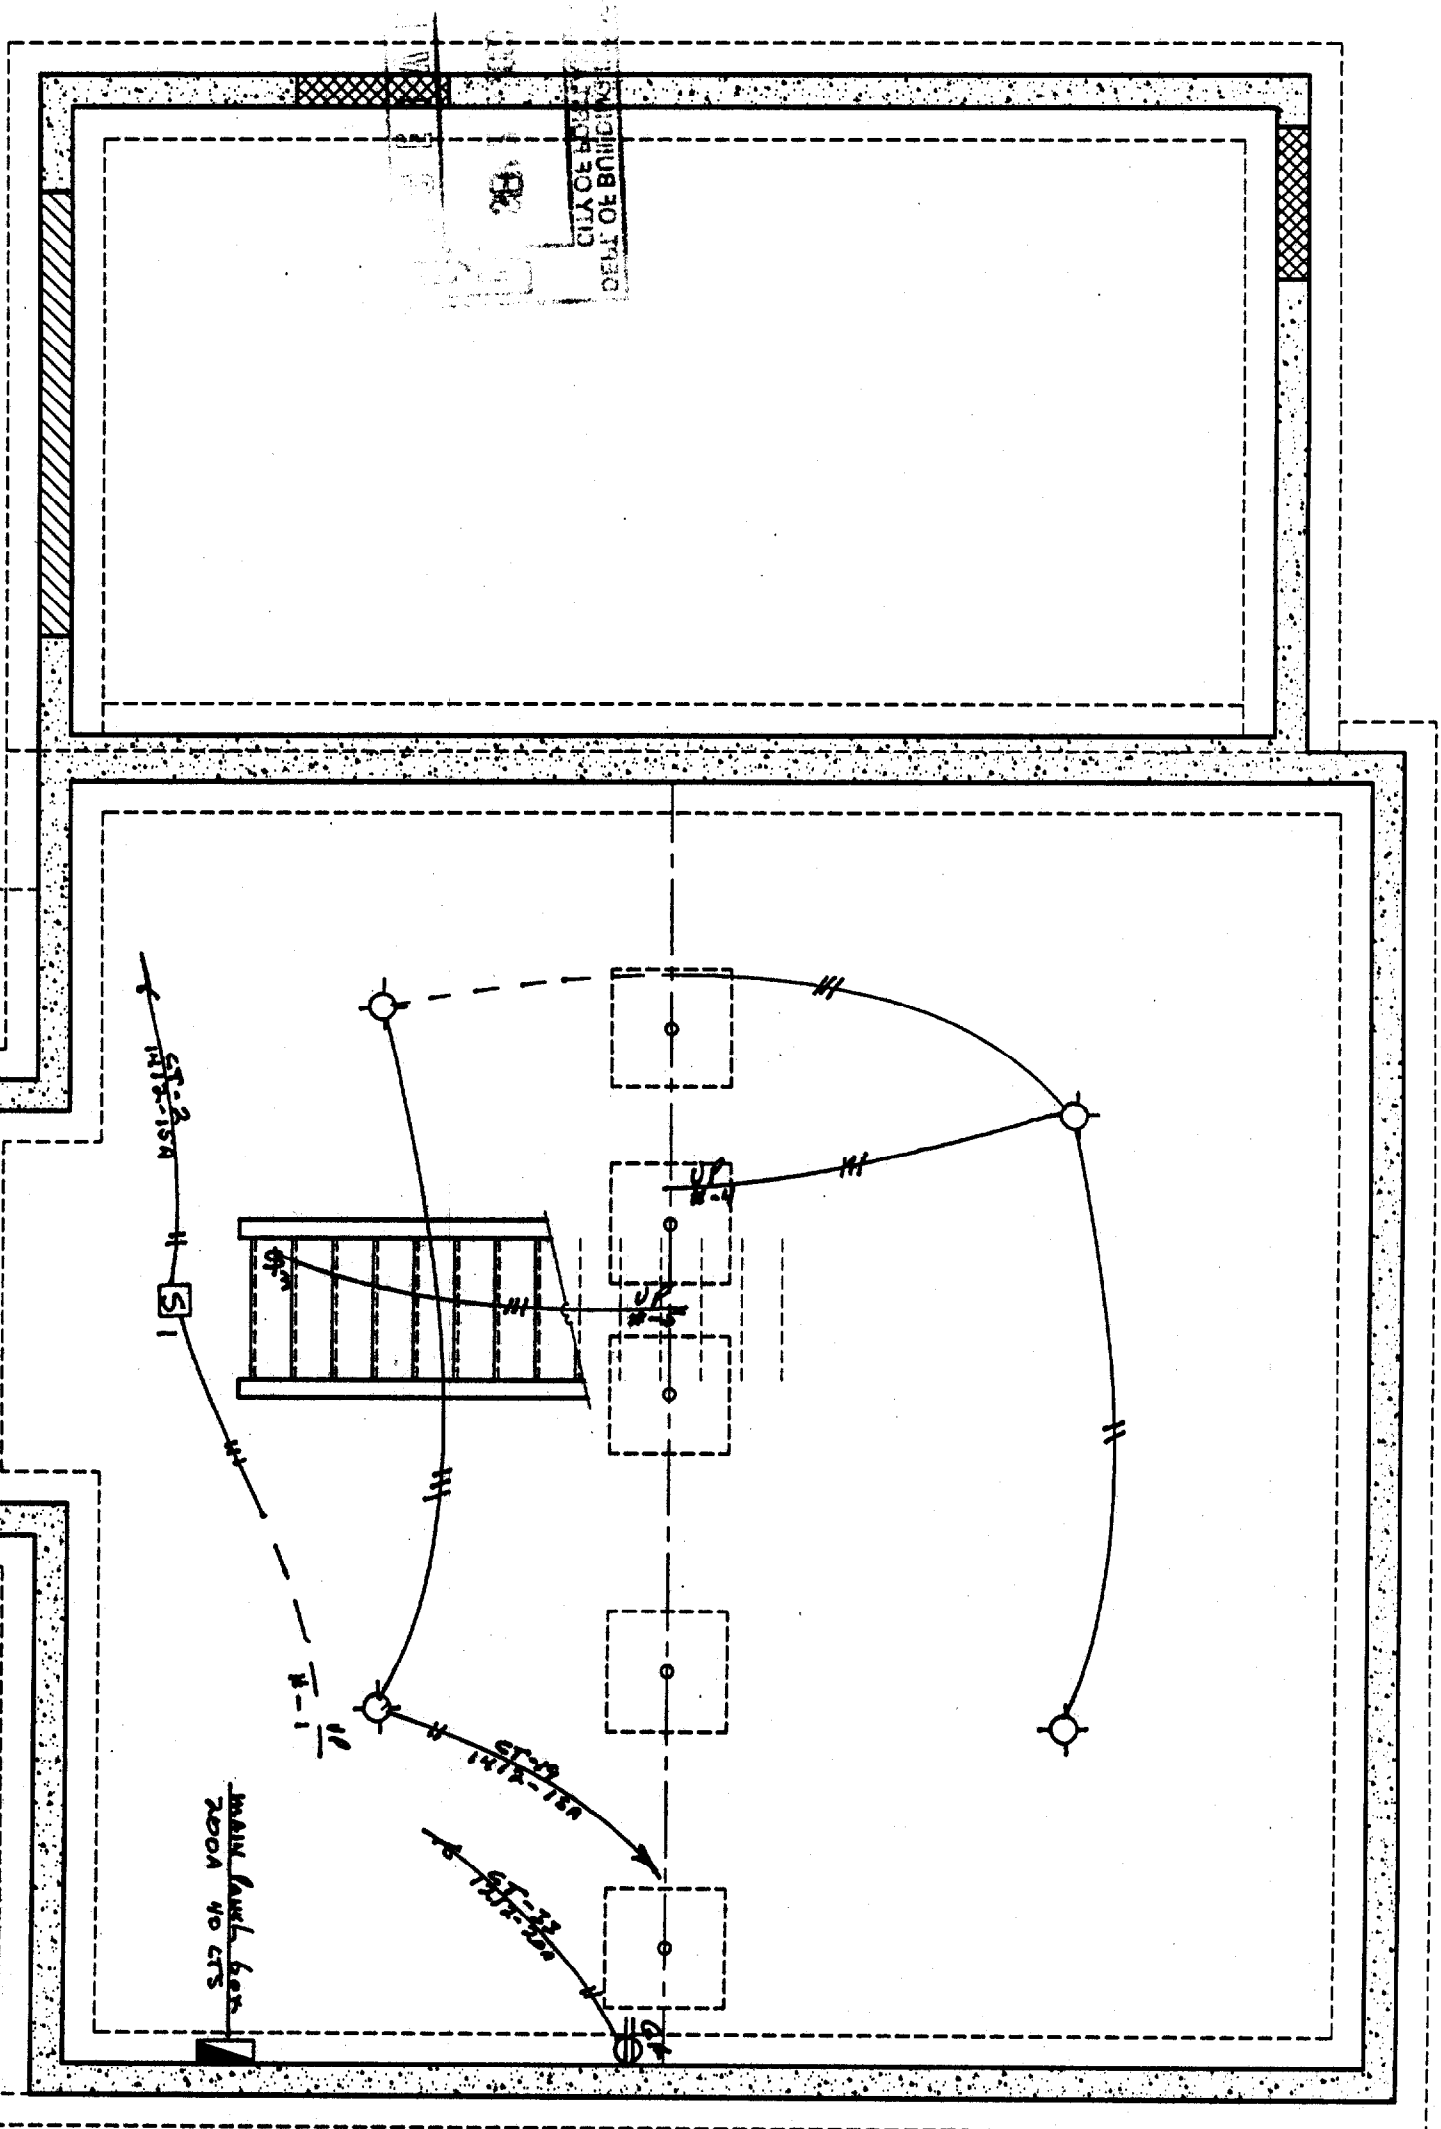

HABITEC 2000

ADVANCED QUALITY CUSTOM HOMES

JOCELYNE DERASPE

C-00254

Scale: 1/4"=1'-0"

Date: 08/28/2003

Dr. by: R.M.
 ELEC. BASEMENT
 App. by: [Signature]
 Page 18A