


FRAMING SCHEDULE	
MARK	SIZE
EXIST.	EXIST. 2"x8" RAFTER
NEW	NEW RAFTER - 2x8@16" UNO
PSL	3 1/2"x11 1/4" PSL

THE EXTENT OF EXISTING ROTTED FRAMING TO BE REPLACED IS APPROXIMATE AND MUST BE VERIFIED DURING DEMOLITION.

EXISTING ROOF FRAMING PLAN
 1/8"=1'-0"
 NEW ROOF DECK IS 5/8" ADVANTECH.

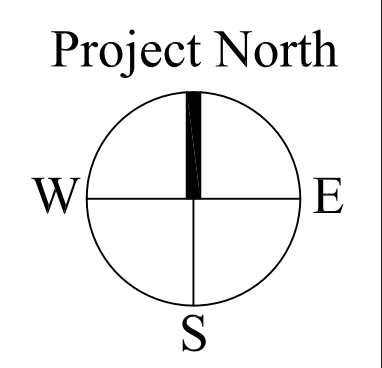

Date: 04 March 2013	Scale: 1/8" = 1'-0"	Revisions:	Project: THE INN AT DIAMOND COVE, LLC McKINLEY COURT GREAT DIAMOND ISLAND, MAINE	Architect: ARCHETYPE architects 48 Union Wharf Portland, Maine 04101 (207) 772-6022 Fax (207) 772-4056	Structural Engineer: STRUCTURAL DESIGN CONSULTING 22 Oakmont Drive Old Orchard Beach, ME 04064-4121 Tel: 207-934-8038 Fax: 207-934-8039	Prepared For: The Inn at Diamond Cove, LLC. PO BOX 3572 PORTLAND, ME 04101
						S5.0