TE:

ALL SLOPED CEILINGS TO BE SKIM COATED.

SEE SHEET A2.1 FOR CONTROL POINT

DIMENSIONS

SEE DETAIL 1 AND 3 ON S2.3 FOR ALLOWABLE

BORING/NOTCHING OF MEMBERS.

JOINTS BETWEEN GYPSUM BOARDS IN SYSTEMS RATED FOR FIRE, SOUND, OR SHEAR MUST BE CONSTRUCTED WITH THE GYPSUM BOARD EDGES IN MODERATE CONTACT. MODERATE CONTACT MEANS THAT THE EDGES ARE ESSENTIALLY TOUCHING EACH OTHER. IT IS POSSIBLE FOR THE GYPSUM BOARD EDGES TO BE IN MODERATE CONTACT YET NOT TOUCH ALONG THE ENTIRE LENGTH OF THE JOINT. THEREFORE, IN GYPSUM BOARD SYSTEMS RATED FOR FIRE, SOUND, OR SHEAR, SMALL GAPS SPACED SPORADICALLY ALONG THE JOINT ARE ACCEPTABLE AS LONG AS THE BOARD EDGES ARE ESSENTIALLY TOUCHING ONE ANOTHER. GAPS UP TO 1/4" MUST BE FILLED WITH A THROUGH-PENETRATION SEALANT (FIRE CAULK). GAPS OVER 1/4" ARE NOT ACCEPTABLE.

NOTE:
FIRE EXTINGUISHERS SHALL BE INSTALLED IN
ACCORDANCE WITH SECTION 906 OF THE 2009 IFC
AND NFPA 10 2007 EDITION. IN ACCORDANCE WITH
NFPA 10: TABLE 5.2.1, FIRE EXTINGUISHERS PLACED
NOT TO EXCEED A MAXIMUM OF 75 FEET OF TRAVEL
DISTANCE. ALL EXTINGUISHERS SHALL BE RATED AT
A MINIMUM OF 2A: IOBC, UNLESS OTHERWISE NOTED.
ADDITIONAL FIRE EXTINGUISHERS ARE REQUIRED IN
THE FOLLOWING COMMON AREAS:

1. ONE 40BC IN THE ELEVATOR EQUIPMENT ROOM.

ONE 40BC IN THE ELEVATOR EQUIPMENT ROOM A CLEAN AGENT IS RECOMMENDED, BUT NOT REQUIRED. ONE 2A: 10BC IN THE KITCHEN. ONE K CLASS IN THE KITCHEN.

CEILING KEYNOTES

NOTE: ALL ASSEMBLIES OF FIRE RATED CONSTRUCTION ARE TO BE FOLLOWED BY ASSEMBLIES ON SHEET A7.1a / A7.1b

TYPE 1- GYP. BD. CEILING APPLIED UNDERSIDE OF FRAMING, TAPE / TEXTURE FOR PAINT, SEE FINISH SCHEDULE FOR PAINT COLOR AND FINISH TEXTURE

TYPE 2- SCHEDULE FOR PAINT COLOR AND FINISH TEXTURE

GYP. BD. CEILING APPLIED TO DROP SOFFIT FRAMING, TAPE / TEXTURE FOR PAINT, SEE FINISH SCHEDULE FOR PAINT COLOR AND FINISH TEXTURE

3 TYPE 3- 2x4 ARMSTRONG SECOND LOOK ANGLED TEGULAR HEAVY DUTY SUSPENDED CEILING TILE, SEE DETAIL 19/A8.5 FOR ADDITIONAL INFORMATION.

TYPE 4- 2x2 ARMSTRONG SECOND LOOK ANGLED TEGULAR HEAVY DUTY SUSPENDED CEILING TILE, SEE DETAIL 19/A8.5 FOR ADDITIONAL INFORMATION.

6 TYPE 6- LINE OF SOFFIT FOR SPRINKLER PIPE SHOWN, 8x8 MAX SQUARE TYPICAL. SEE 8/A4.7.

TYPE 5- CONTINUOUS VENTED VINYL SOFFIT, COLOR WHITE.

7 TYPE 7- MIRROFLEX - OLD WORLD - NEW ORLEANS- BERMUDA BRONZE 'N417

8 TYPE 8- 2x2 ARMSTRONG FINE FISSURED SQUARE LAY-IN SUSPENDED CEILING TILE. ITEM NO. 1713, COLOR - TECH BLACK, SEE DETAIL 19/A8.5 FOR ADDITIONAL INFORMATION.


9 TYPE 9- WOOD STAINED CROWN MOLDING.
10 TYPE 10- PAINT GRADE CROWN MOLDING.

11 TYPE 11- EXPANSION JOINTS IN GYP. BD. CEILING

TYPE 12- 2x2 GRIDSTONE BRAND FIRE-SHIELD GYPSUM CEILING PANELS. ITEM NO.GB 5044, SEE DETAIL 19/A8.5 (SIM.) FOR ADDITIONAL INFORMATION.


CEILING LEGEND

HVAC EQUIPMENT IN CEILING, SEE M3 SHEETS FOR SIZING INFORMATION

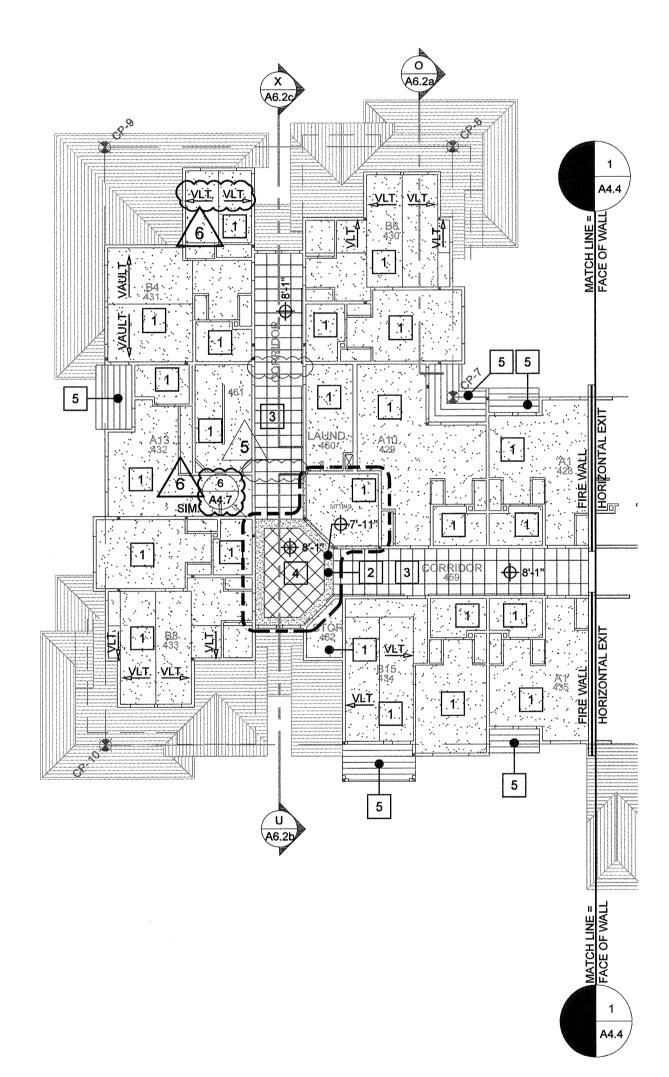


FOURTH FLOOR - CEILING

SCALE: 1/16" = 1'-0"

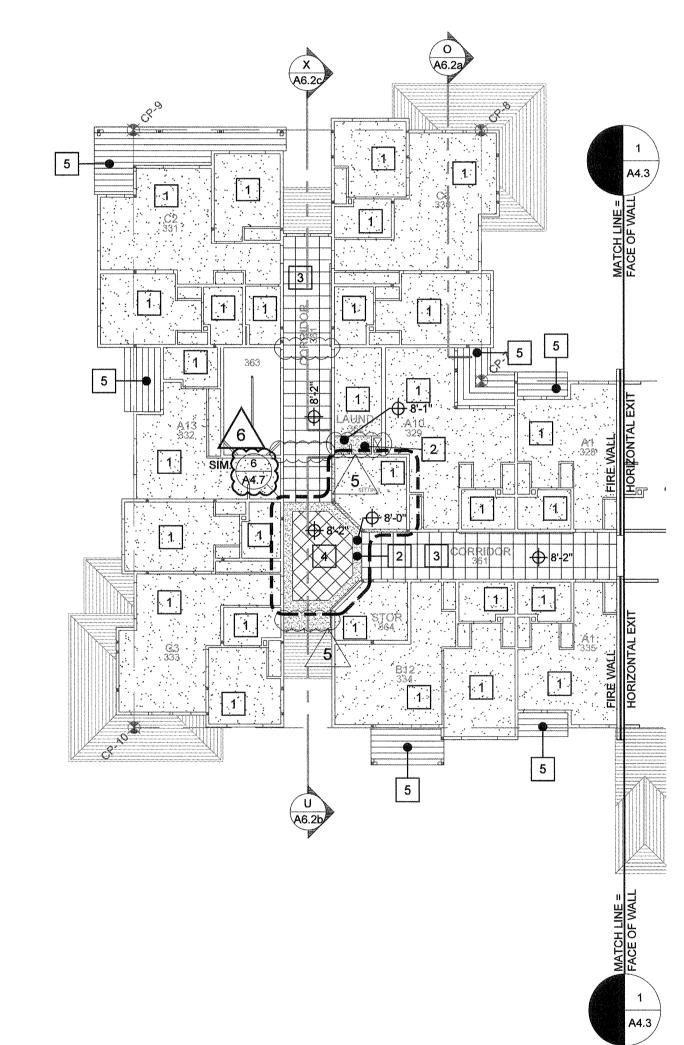


THIRD FLOOR - CEILING

SCALE: 1/16" = 1'-0"

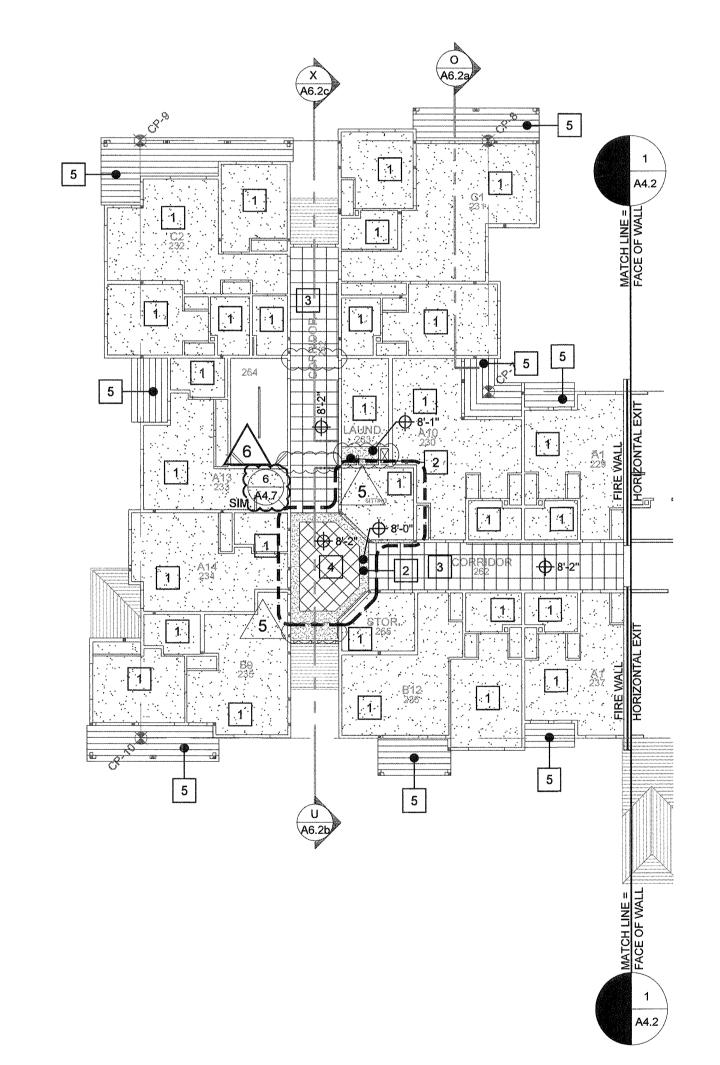

SECOND FLOOR - CEILING

SCALE: 1/16" = 1'-0"

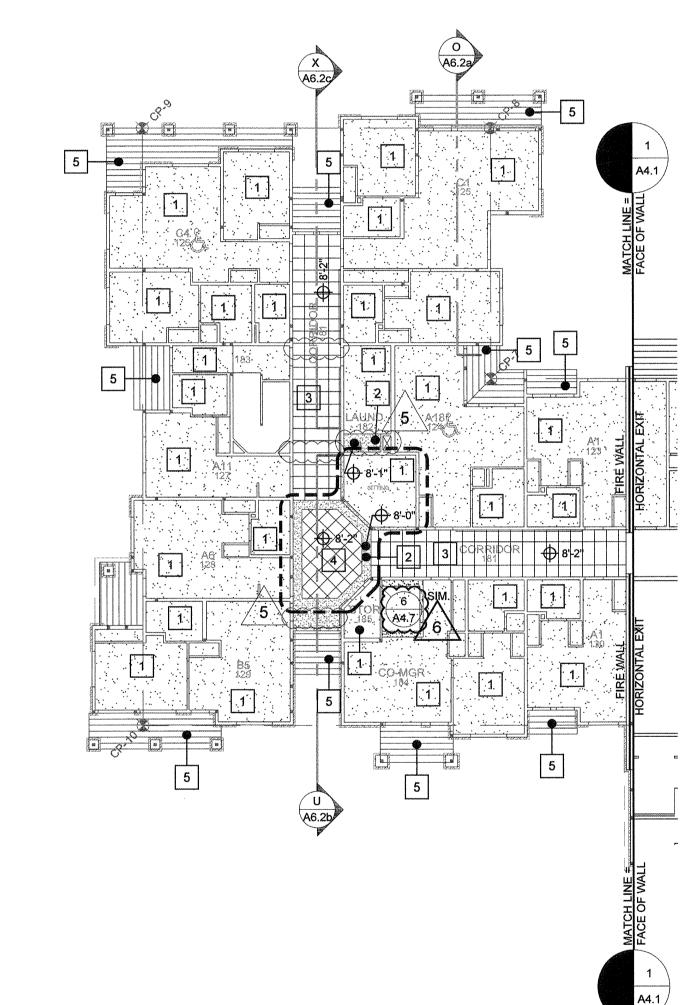

FIRST FLOOR - CEILING

SCALE: 1/16" = 1'-0"



ALOS NO. 3526 KY NO. 3526 KY

Fe DA PASO1 W lenityarchitecture.com

3150 Kettle Court SE, Salem, Oregon 9

VERAL CONTRACTOR, INC MCGILCHRIST STREET SE, SUITE 200 SALEM, OREGON, 97302 HONE (503) 586-7401

PORTLAND
RETIREMENT RESIDENC
802 OCEAN AVE. PORTLAND, MAINE 04103

MING 1C1
CEILING PLAN

DATE 8/28/2015 REVISED DATE

2/2/2016

SHEET A4.6