



SUNNY BOY 5000US / 6000US / 7000US / 8000US



SB 8000US AVAILABLE IN 2010

- Highest CEC efficiency in its class
- Integrated load-break rated lockable DC disconnect switch
- Integrated fused series string combiner

- Sealed electronics enclosure & Opticool™
- Comprehensive SMA communications and data collection options

- Ideal for residential or commercial applications
- Sunny Tower compatible
- 10 year standard warranty
- UL 1741/IEEE-1547 compliant



SUNNY BOY 5000US / 6000US / 7000US / 8000US

The best in their class


Our US series inverters utilize our proven technology and are designed specifically to meet IEEE-1547 requirements. Sunny Boy 6000US, Sunny Boy 7000US and Sunny Boy 8000US are also compatible with the Sunny Tower. Increased efficiency means better performance and shorter payback periods. All four models are field-configurable for positive ground systems making them more versatile than ever. Throughout the world, Sunny Boy is the benchmark for PV inverter performance and reliability.

Technical Data

	SB 5000US	SB 6000US	SB 7000US	SB 8000US
Recommended Maximum PV Power (Module STC)	6250 W	7500 W	8750 W	10000 W
DC Maximum Voltage	600 V	600 V	600 V	600 V
Peak Power Tracking Voltage	250-480 V	250-480 V	250-480 V	300-480 V
DC Maximum Input Current	21 A	25 A	30 A	30 A
Number of Fused String Inputs	3 (inverter), 4 x 20 A (DC disconnect)	3 (inverter), 4 x 20 A (DC disconnect)	3 (inverter), 4 x 20 A (DC disconnect)	3 (inverter), 4 x 20 A (DC disconnect)
PV Start Voltage	300 V	300 V	300 V	365 V
AC Nominal Power	5000 W	6000 W	7000 W	8000 W
AC Maximum Output Power	5000 W	6000 W	7000 W	8000 W
AC Maximum Output Current (@ 208, 240, 277 V)	24 A, 21 A, 18 A	29 A, 25 A, 22 A	34 A, 29 A, 25 A	N/A, 32 A, 29 A
AC Nominal Voltage Range	183 - 229 V @ 208 V 211 - 264 V @ 240 V 244 - 305 V @ 277 V	183 - 229 V @ 208 V 211 - 264 V @ 240 V 244 - 305 V @ 277 V	183 - 229 V @ 208 V 211 - 264 V @ 240 V 244 - 305 V @ 277 V	N/A @ 208 V 211 - 264 V @ 240 V 244 - 305 V @ 277 V
AC Frequency: nominal / range	60 Hz / 59.3 - 60.5 Hz	60 Hz / 59.3 - 60.5 Hz	60 Hz / 59.3 - 60.5 Hz	60 Hz / 59.3 - 60.5 Hz
Power Factor (Nominal)	0.99	0.99	0.99	0.99
Peak Inverter Efficiency	96.8%	97.0%	97.1%	96.5%
CEC Weighted Efficiency	95.5% @ 208 V 95.5% @ 240 V 95.5% @ 277 V	95.5% @ 208 V 95.5% @ 240 V 96.0% @ 277 V	95.5% @ 208 V 96.0% @ 240 V 96.0% @ 277 V	N/A @ 208 V 96.0% @ 240 V 96.0% @ 277 V
Dimensions: W x H x D in inches	18.4 x 24.1 x 9.5	18.4 x 24.1 x 9.5	18.4 x 24.1 x 9.5	18.4 x 24.1 x 9.5
Weight / Shipping Weight	141 lbs / 148 lbs	141 lbs / 148 lbs	141 lbs / 148 lbs	148 lbs / 152 lbs
Ambient Temperature Range	-13 to 113 °F	-13 to 113 °F	-13 to 113 °F	-13 to 113 °F
Power consumption at night	0.1 W	0.1 W	0.1 W	0.1 W
Topology	Low frequency transformer, true sinewave	Low frequency transformer, true sinewave	Low frequency transformer, true sinewave	Low frequency transformer, true sinewave
Cooling Concept	OptiCool™, forced active cooling	OptiCool™, forced active cooling	OptiCool™, forced active cooling	OptiCool™, forced active cooling
Mounting Location: indoor / outdoor (NEMA 3R)	●/●	●/●	●/●	●/●
LCD Display	●	●	●	●
Communication: RS485 / wireless	○/○	○/○	○/○	○/○
Warranty: 10 years / 15 years / 20 years	●/○/○	●/○/○	●/○/○	●/○/○
Compliance: IEEE-929, IEEE-1547, UL 1741, UL 1998, FCC Part 15 A & B	●	●	●	●
Specifications for nominal conditions	● Included ○ Optional			

NOTE: US inverters ship with gray lids.

Efficiency Curves

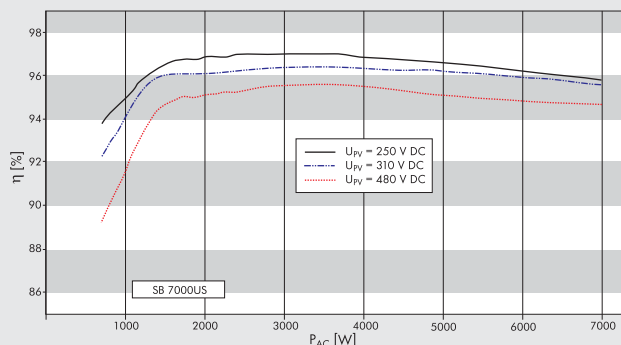

Integrated web server for remote online access to all current data from any PC.

View daily and archived performance data graphically on Sunny Portal.

Integrated FTP server for data storage and download to a PC.

Memory expansion and data transmission to a PC using a removable SD card.

Easily view data in analysis programs.

SUNNYBOY6278-DU5094221 Sunny Boy and SMA are registered trademarks of SMA Solar Technology AG. Text and figures comply with the state of the art applicable when printing. Subject to technical changes. We accept no liability for typographical and other errors. Printed on chlorine-free paper.

Tel. +1 916 625 0870
Toll Free +1 888 4 SMA USA
www.SMA-America.com

SMA America, LLC